

1ST EDITION

---

# METRIC ONLINE PRODUCT GUIDE

MECHANICAL COMPONENTS  
FOR ASSEMBLY AUTOMATION



**MISUMI**





## WHY MISUMI?

Our mission is to provide innovative configurable products that fulfill our customers' needs for high quality, competitive prices and short delivery times. MISUMI currently serves over 150,000 customers worldwide. MISUMI's products can be utilized in a diverse range of industries including automotive, medical, semiconductor, packaging and 3D Printing.





# Find the product you're looking for easily & quickly on [misumiusa.com](https://www.misumiusa.com).

## Jump from paper to web by product type in seconds

MISUMI e-commerce makes it possible to find, configure, download CAD Data and place orders. Just type the product Web Code or Product Keyword.

Insert Web Code or Keyword (ex: #SFP or Linear Shaft)

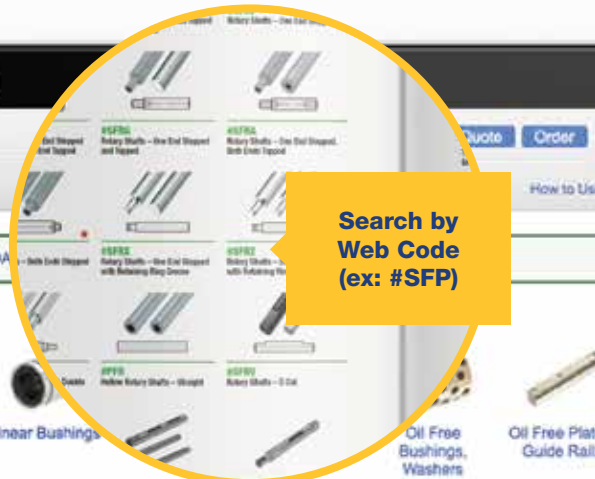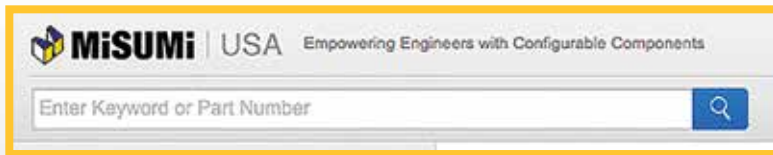

- Automation Components
  - Linear Motion
  - Locating, Positioning, Jigs & Fixtures
  - Rotary Motion
  - Connecting Parts
  - Motors
  - Rotary Power Transmission
  - Conveyors & Material Handling
  - Pneumatics, Hydraulics
  - Pipe, Tubes, Hoses & Fittings
  - Aluminum Extrusions, Framing, Support & Posts
  - Casters & Leveling Mounts
  - Materials, Cover Panels
  - Doors, Cabinet Hardware
  - Adjusting, Fastening, Magnets
  - Springs, Shock Absorbers
  - Antivibration, Soundproofing Materials, Safety Products
  - Inspection
  - Sensors, Switches
  - Heaters, Temperature Control
- Press Die Components
- Plastic Mold Components

### Linear Motion



### Cable Carriers

### Locating, F

### Locating Pins, Bushings


### Rotary Motion



# Configurable ordering made easy.


**Only MISUMI offers a completely configurable choice.**

Configuring your MISUMI components to your exact specifications is easy with our 3D CAD downloads, free engineering support, and over 9 million configurable components.

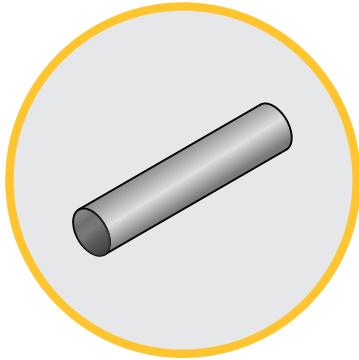


**1** →  
Select Part  
Select Material

**Standard**  
Off the shelf, stock materials.

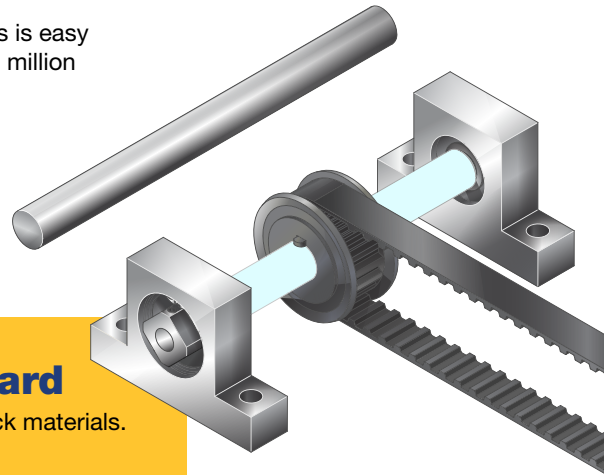


vs.

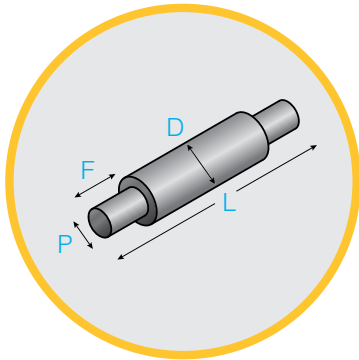


**2**  
Configure Size  
(Diameter,  
Length, etc.)

**Configurable**  
Only MISUMI offers:


- + Flexibility
- + Unlimited Selection
- + Uncompromised Design
- + Smart Universal Part Number
- + CAD
- + Low Cost
- + Fast Delivery
- + Convenience

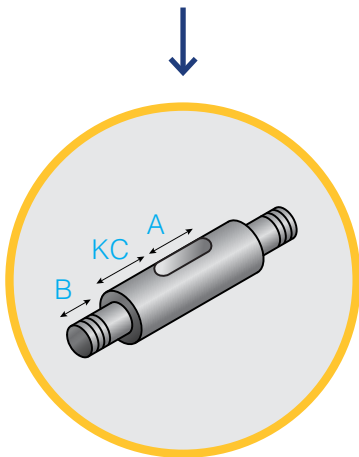

**3** →  
Add Features  
& Refine

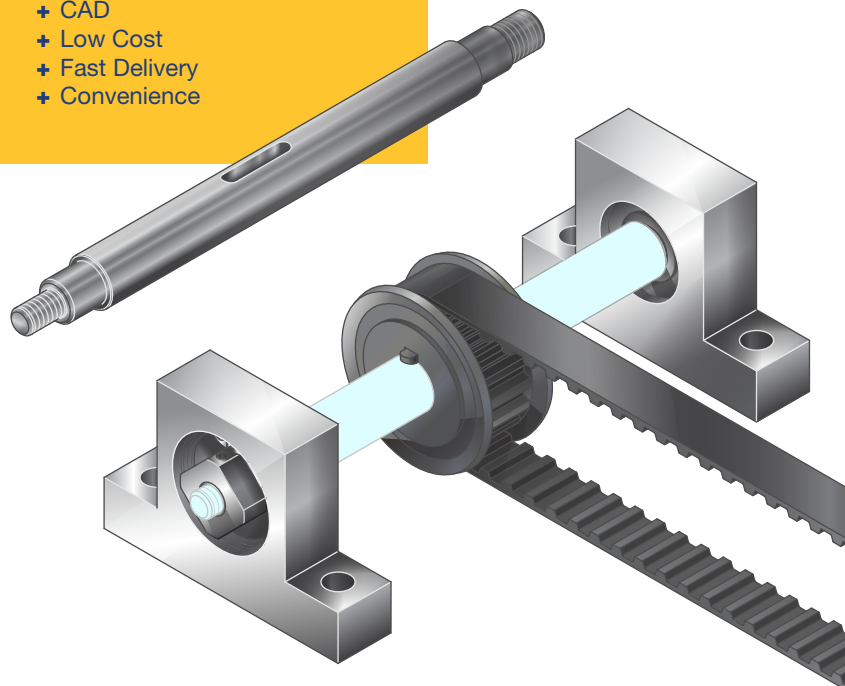

**MISUMI USA** has more than 9 million configurable components from which to choose, in as fine as 0.01mm. There are no minimum orders, no set up charges, free CAD downloads, and same day shipping on stock components.

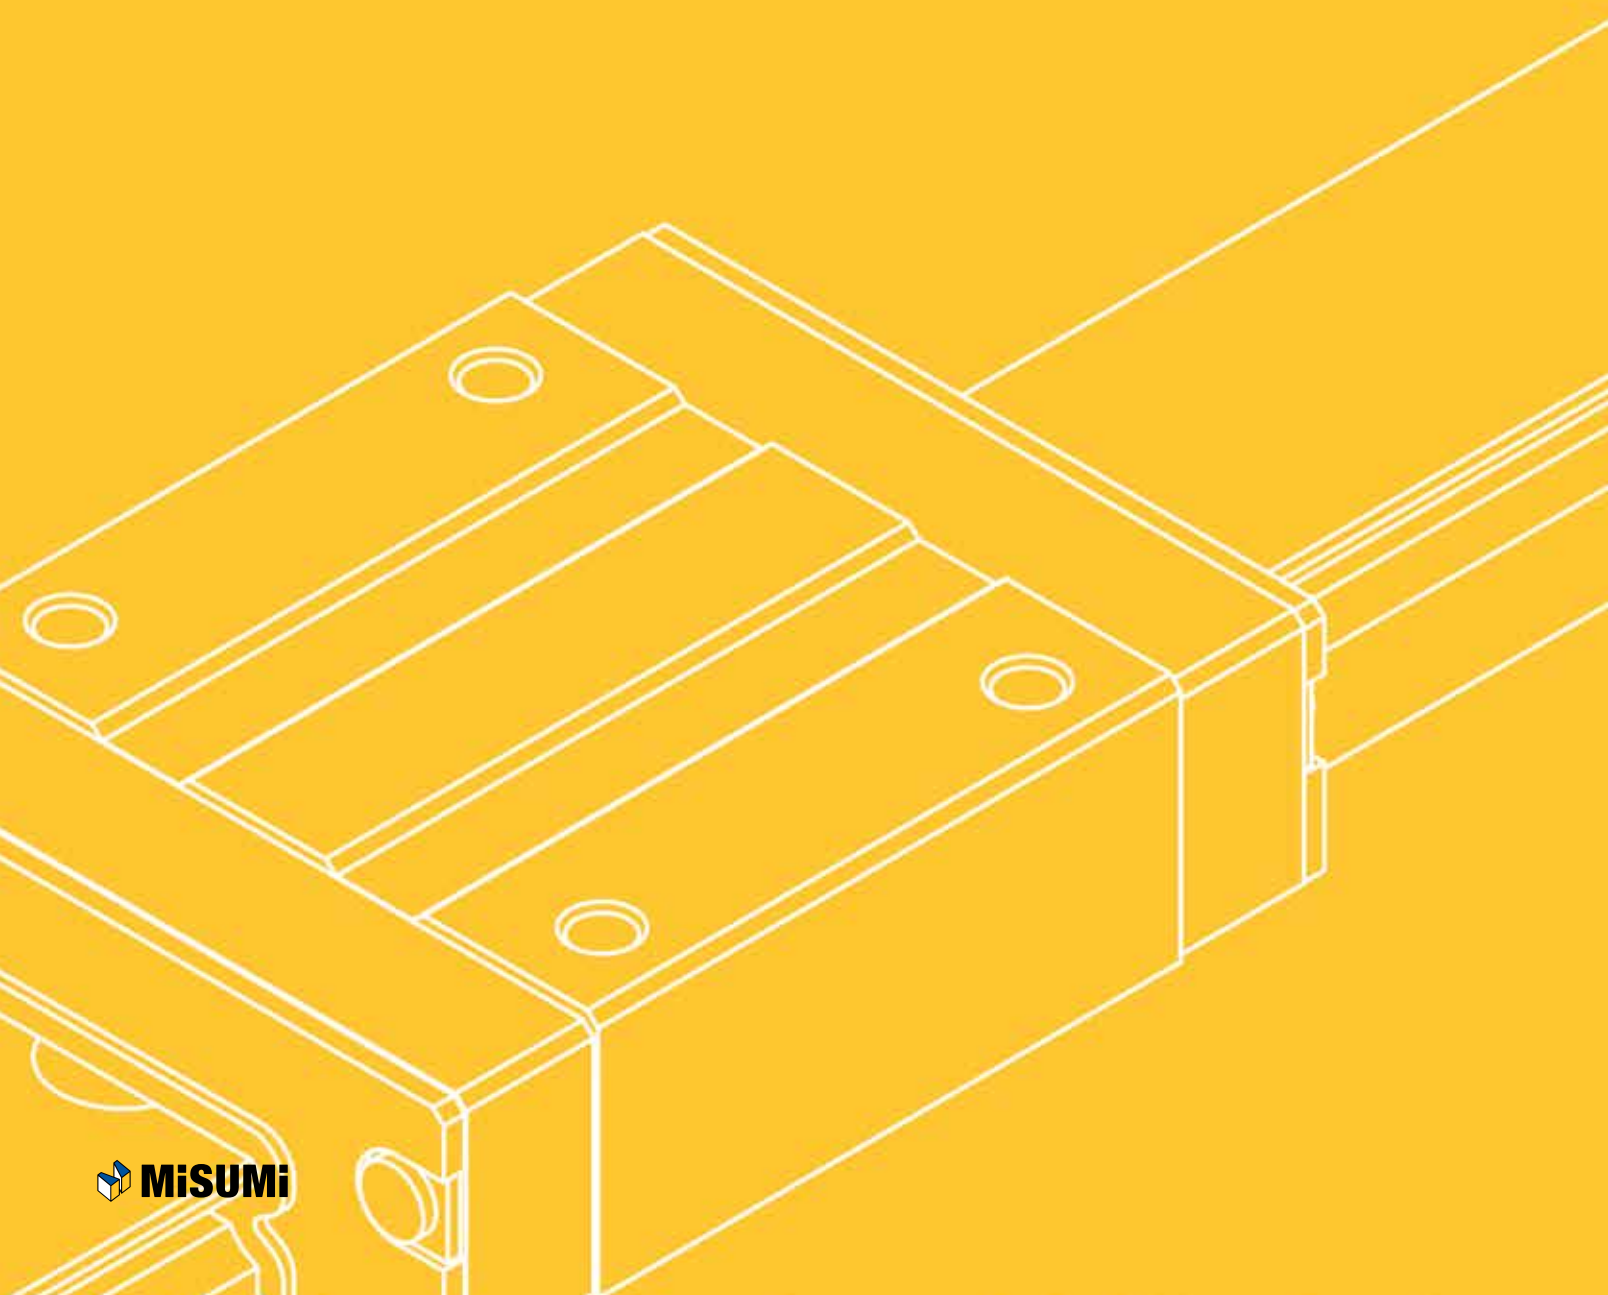

# TABLE OF CONTENTS

---

Mechanical Components for Product Groups	<b>8–9</b>
Product Line	<b>10–127</b>
Machined Parts By Shape / Resin Materials / Actuators Lineup	<b>128–179</b>
IDEA Note	<b>180–203</b>
Technical Data	<b>204–295</b>
Index	<b>296–297</b>
Warranty and Terms & Conditions	<b>298</b>





# PRODUCT GROUPS



**Shaft Collars**  
Pages 13–14



**Linear Actuators**  
Page 20



**Lead Screws / Digital Indicators / Clamps**  
Pages 26–27



**Shaft Couplings**  
Pages 32–33



**Timing Pulleys / Belts / Keyless Bushings**  
Page 39



**Locating & Guide Components**  
Page 49–51



**Contact Probes**  
Pages 56–57



**Linear Bushings**  
Pages 15–16



**Linear Guides / Cross Rollers**  
Page 21



**Rotary / Drive Shafts**  
Page 28



**Rollers / Conveyor Components**  
Page 34



**Gears**  
Pages 40–41



**Plungers**  
Pages 52–53



**Positioning Stages**  
Pages 58–59



**Linear Shafts**  
Pages 10–12




**Ball Guides / Ball Splines**  
Pages 16–17



**Slide Rails / Cable Carriers**  
Pages 22–23



**Cantilever Shafts / Fulcrum Pins / Precision Pivot Pins**  
Pages 29–30



**Conveyors / Accessories**  
Pages 35–37



**Sprockets / Chains**  
Pages 41–42



**Toggle Clamps / Clamp Units**  
Page 54



**Image Processing / Accessories**  
Page 60



**Shaft Supports**  
Pages 12–13



**Oil Free Bushings / Plates / Rails**  
Pages 18–19



**Ball Screws / Support Units**  
Pages 24–25



**Housed Bearings / Bearings / Cam Followers**  
Page 31



**Flat Belts / Round Belts / Pulleys / Idlers**  
Pages 38–39



**Locating Pins / Bushings**  
Pages 43–48



**Inspection Components**  
Pages 54–56



**Sensors / Switches**  
Pages 60–62






**Posts / Strut Clamps / Stands**

Pages 62–63



**Angle Plates / Gussets / Standoffs**

Page 63



**Washers / Collars / Shims**

Pages 64–66



**Screws/ Nuts / Washers / Hooks**

Pages 66–67



**Keys / Dowel Pins**

Page 68



**Cotter Pins / Retaining Rings**

Pages 68–69



**Inserts / Grease Nipples**

Page 69–70



**Metal Materials**

Page 71



**Plastic Materials**

Page 72



**Springs / Shock Absorbers / Gas Springs**

Pages 72–74



**Sound Proofing / Protecting / Antistatic / Brushes**

Pages 74–75




**Urethanes / Rubbers / Sponges / Felts**

Pages 76–78



**Aluminum Extrusions**

Pages 79–80




**Aluminum Extrusion Units**

Page 81



**Pipe Frames**

Page 80



**Perforated Metals / Fences / Nets / Panels**

Pages 80–81



**Transparent Plastic Covers**

Page 82



**Casters**

Pages 83–85



**Leveling Mounts Rubber Feet**

Pages 85–86



**Levers / Handles**

Pages 86–87



**Hand Wheels / Knobs / Thumb Screws**

Pages 87–89



**Pull Handles / Hinges**

Pages 89–92



**Catches / Draw Latches / Door Stays**

Pages 92–93




**Manifolds**

Pages 93–95



**Pipes / Pipe Fittings / Hoses / Valves**

Pages 95–105



**Sanitary Pipes**

Pages 105–107



**Tubes / Fittings / Valves / Seals / Suction Components**

Pages 107–114



**Nozzles / Adjustable Hoses**

Pages 114–116



**Cylinders / Grippers / Accessories**

Pages 116–119



**Rod End Bearings / Hinge Bases / Links**

Pages 119–120



**Heaters / Temperature Controllers / Insulating Plates**

Pages 122–123



**Machined Plates / Brackets**

Pages 124–127


Enter Web Code (ex. #SFJ)




Linear Shafts

Product Name	Linear Shafts	Rotary Shafts	Standoffs	Rods	
Page	pgs. 10-12	pg. 28	pg. 63	pgs. 71-72, 81-82	
Usage/Picture					
Motion Type	Linear Motion	Rotary Motion	Structural, Support	General	
Size	Ø3-50 mm	Ø2-50 mm	Ø5-50 mm	Ø0.3-80 mm	
Max. Length (Max. length depends on shaft dia.)	1500 mm	800 mm	1000 mm	1000 mm	
Dia. Tolerance	Ground g6/h5/f8	Ground g6/h6/h7 Drawn h9	0/-0.1mm	0/-0.1(0.2) ±0.1-0.4	
Material	Carbon/Alloy Steel	•	•	•	
	Stainless Steel	•	•	•	
	Tool Steel	—	—	—	•
	Aluminum	—	—	•	•
	Brass	—	—	—	•
	Titanium	—	—	—	•
	Resin	—	—	—	•
Hardness	— Case Hardened — Unhardened	— Case Hardened — Through Hardened — Unhardened	— Unhardened	— Unhardened — Through Hardened	
Cost \$	\$\$\$\$	\$\$\$	\$\$	\$	


**Linear Shafts**




**#SFJ**  
Straight




**#SFJW**  
Both Ends Tapped




**#SFHZ**  
Both Ends Tapped with  
Wrench Flats, Hole




**#SFJT**  
One End Tapped




**#SFHC**  
One End Tapped with  
Wrench Flats, Hole




**#SFAT**  
Full Length Case Hardened,  
One or Both Ends Tapped



**#SFAH**  
Both Ends Stepped and Tapped,  
Both Ends Stepped




**#SFHU**  
Both Ends Stepped and  
Tapped with Wrench Flats




**#SFAA**  
One End Tapped and One End  
Stepped and Tapped



**#SFUP**  
One End Stepped, Both Ends Tapped  
with Wrench Flats



**#SFAC**  
One End Stepped and Tapped,  
One End Stepped



**#SFPG**  
One End Stepped and Tapped with  
Wrench Flats



**#SFAD**  
One End Threaded,  
One End Tapped



**#SFAZ**  
One End Threaded, One End Tapped  
with Wrench Flats, Hole



**#SAFD**  
One End Threaded with Undercut,  
One End Tapped



**#SAFZ**  
One End Threaded with Undercut,  
One End Tapped - Wrench Flats,  
Hole




**#SFAY**  
One End Stepped and Threaded,  
One End Tapped




**#SFAL**  
Straight and Both Ends Threaded




**#SFAM**  
Both Ends Threaded



**#SFAU**  
Both Ends Threaded with  
Wrench Flats, Hole



**#SAFM**  
Both Ends Threaded with  
Undercuts



**#SAFU**  
Both Ends Threaded with  
Undercut, with Wrench Flats, Hole



**#SFAQ**  
Straight, One End Threaded



**#SFAN**  
One End Threaded




**#SFAS**  
One End Threaded, One End Tapped  
with Wrench Flats, Hole



**#SAFN**  
One End Threaded with Undercut



**#SAFS**  
One End Threaded with  
Wrench Flats, Hole



**#SFAF**  
One End Stepped and Threaded,  
Both Ends Stepped and Threaded




**#SFAB**  
One End Threaded, One End Stepped/  
Stepped and Tapped




**#PSFC**  
Fully Plated




**#SFJQ**  
Set Screw Grooves



**#SFBH**  
Hexagon Socket



**#SFDG**  
One End Two Tapped Holes




**#SFAR**  
Retaining Ring Grooves on  
Both Ends




**#SFAK**  
Key Groove on One End



**#SFLU**  
One End Tapered, One End Tapped




**#SFIG**  
With Tapped Pilot




**#VFJW**  
Both Ends Tapped with  
Wrench Flats – Precision




**#VFJC**  
One End Tapped with Wrench Flats,  
Hole – Precision



**#VFAH**  
Both Ends Stepped and Tapped –  
Precision



**#VFAA**  
One End Stepped,  
Both Ends Tapped – Precision




**#V FAG**  
One End Stepped and Tapped –  
Precision




**#VFAZ**  
One End Threaded,  
One End Tapped – Precision




**#VAFD**  
One End Threaded with Undercut, One  
End Tapped – Precision



**#VFAD**  
One End Stepped and Threaded,  
One End Tapped – Precision



**#VFBM**  
Both Ends Threaded with  
Wrench Flats – Precision




**#VAFM**  
Both Ends Threaded with Under-  
cut, with Wrench Flats – Precision



**#VFBN**  
One End Threaded with  
Wrench Flats – Precision




**#VAFN**  
One End Threaded with Wrench Flats,  
Hole – Precision




**#SPJ**  
Pipe (Hollow) Shafts




**#SPJT**  
Hollow-One End Tapped  
with Wrench Flats




**#SPJM**  
Hollow-Both Ends Threaded




**#SPJD**  
Hollow-One End Threaded,  
One End Tapped




**#SPJW**  
Hollow-Both Ends Tapped  
with Wrench Flats



**#SPJN**  
Hollow-One End Threaded,  
with Wrench Flats




**#SPJG**  
Hollow-One End Stepped



**#SPJQ**  
Hollow-Both Ends Stepped



**#SPJA**  
Hollow-One End Stepped,  
One End Tapped



**#SFAE**  
Hollow-Continuous Support



**#FSFJ**  
Hollow-One End Threaded,  
with Wrench Flats



**#FSPJ**  
Hollow, Shaft End Shapes  
Specified

**Shaft  
Supports**



**#ATHC**  
Flanged Mount, Thick Sleeve



**#STHI**  
Flanged Mount with Pilot



**#STHC**  
Flanged Mount with Dowel Holes



**#STH1**  
Flanged Mount



**#STH3**  
Flanged Mount with Pilot,  
Thick Sleeve



**#STH2**  
Flanged Mount with Dowel Holes



**#STHW**  
Flanged Mount, Clamp-On



**#STH6**  
Flanged Mount with Pilot, Clamp-On



**#STH5**  
Flanged Mount with Dowel Holes,  
Clamp-On



**#STHM**  
Compact, Clamp



**#STH4**  
Flanged Mount with Keyway



**#STHX**  
Flanged Mount, Back Mount



**#STHP**  
Flanged, Two Piece Clamp



**#SHF**  
Flange Mount, Cast



**#SHFL**  
Flange Mount, Cast, Long Sleeve



**#SHA**  
T-Shaped Casting, Clamp-On



**#SHAN**  
Wide T-Shaped Casting, Clamp-On



**#SHT2**  
T-Shaped Casting



**#SHTC**  
T-Shaped Casting, Side Clamp-On



**#SHT3**  
Compact T-Shaped Casting,  
Side Clamp-On



**#SHTD**  
Two-Piece T-Shaped Casting



**#SHT4**  
Two-Piece Wide T-Shaped Casting



**#SHTA**  
T-Shaped, Set Screw



**#SHTB**  
T-Shaped, Wide



**#SHST**  
T-Shaped, Clamp-On



**#SHS3**  
Wide T-Shaped, Clamp-On



**#SHWT**  
T-Shaped, Side Clamp-On



**#SHW2**  
Wide T-Shaped, Side Clamp-On



**#SHPT**  
Two-Piece T-Shaped



**#SHP2**  
Two-Piece Wide T-Shaped



**#SHM3**  
Compact, Standard



**#SHMT**  
Compact, Wide



**#SHMW**  
Compact, Standard, Side Clamp-On



**#SHMP**  
Two-Piece Compact



**#SHM2**  
Two-Piece Wide Compact



**#SHS4**  
T-Shaped with Clamp Lever



**#SHHT**  
T-Shaped, Hinged



**#SHKH**  
L-Shaped, Hinged



**#SHK2**  
L-Shaped



**#SHK3**  
L-Shaped, Clamp-On



**#SHK4**  
L-Shaped, Side Clamp-On



**#SHKP**  
Two Piece L-Shaped



**#SHKL**  
L-Shaped Cast



**#SHKS**  
L-Shaped Cast, Clamp-On



**#SHKW**  
L-Shaped Cast, Side Clamp-On



**#SHKB**  
Two-Piece L-Shaped Cast



**#SHBM**  
Bottom Mount



**#SHB2**  
Bottom Mount, Wide



**#SHSB**  
Bottom Mount, Clamp-On



**#SHS2**  
Wide Bottom Mount, Clamp-On



**#SHSP**  
Two-Piece Bottom Mount



**#SHSN**  
Two-Piece Wide Bottom Mount



**#SHSW**  
Bottom Mount, Side Clamp



**#SHQB**  
Side Mount



**#SHYA**  
Side Mount, Clamp-On



**#SHUA**  
Side Mount, Side Clamp



**#SHZA**  
Two-Piece Side Mount

Shaft Collars



**#SCC**  
Set Screw



**#SCS**  
One-Piece Clamp-On



**#SCSP**  
Two-Piece Clamp-On



**#SCD**  
One-Piece Clamp-On with Urethane



**#SCSD**  
Two-Piece Clamp-on with Urethane



**#SCS1**  
Plastic, One-Piece Clamp-on



**#SCS3**  
Plastic, Two-Piece Clamp-on



**#SCSA**  
Aluminum, One-Piece Clamp-on



**#SCNP**  
Aluminum, Two-Piece Clamp-on



**#SCBR**  
Set Screw, Short Shoulder  
(for Bearings)



**#SCBN**  
Clamp-On, Short Shoulder  
(For Bearings)



**#SCMN**  
Set Screw with 2 Holes



**#SCSG**  
With Counterbored Holes



**#SCSM**  
2 Tapped Holes



**#SCST**  
3 Holes, 3 Tapped Holes



**#SCS2**  
Two-Piece Clamp-on, with 2 Holes



**#SCWM**  
Insert Lock, 2 Holes, Threads



**#SCWD**  
With Clamp Lever, Wedge, D Cut



**#SCWR**  
Insert Lock, 3 Holes, Threads



**#SCWJ**  
With Clamp Lever, Wedge,  
Side Mounting Holes



**#SCKL**  
With Clamp Lever, Standard



**#SCDK**  
With Clamp Lever, D Cut



**#SCJK**  
With Clamp Lever, Side Mounting  
Holes



**#SDSN**  
D Cut, Set Screw



**#SDS**  
D Cut, Compact, Clamp



**#SDN**  
Two-Piece D-Cut



**#SCJS**  
Side Mounting Holes, Clamp



**#SCJP**  
Two-Piece Clamp-on with Side  
Mounting Holes



**#SCJN**  
2-Flats, Cut Surface Mount Hole



**#SCSH**  
Hinged



**#SCPCK**  
2-Flats, Cut Surface Mount Hole



**#WSC**  
One Touch



**#SCCN**  
Threaded I.D., Set Screw



**#SCSN**  
Threaded I.D, Clamp-on



**#SCKS**  
With Key Groove/Set Screw



**#SCSK**  
With Key Groove, Clamp-on



Product Name	Linear Bushings	Oil Free Bushings	Ball Splines	Linear Guides
Page	pgs. 15–16	pgs. 18–19	pg. 17	pgs. 21–22
Usage/Picture				
Typical Usage	Provides smooth linear motion. Runs at higher speed than plain bushings. Used with hardened shafts.	Used for heavy loads in dirty environments. Can be used with hardened and unhardened shafts. Most don't require lubrication.	Use for high speed linear motion under high torsional loads.	Used for smooth and high accuracy motion under heavy loads and moment loads.
Motion Type	Linear*	Linear / Rotary	Linear	Linear
Size	Ø3–50 mm	Ø5–100 mm	Ø6–30 mm	Height 6–42 mm
Materials	– Steel – Stainless Steel	– Copper Alloys (Brass, Bronze) – Steel – Resins (PTFE, Polyacetal)	– Steel – Stainless Steel	– Steel – Stainless Steel
Available Coatings	– Electroless Nickel – Low Temperature Black Chrome	N/A	N/A	– Low Temperature Black Chrome
Load Capacity	Medium	Medium–High	Medium–High	High
Operating Temp.	-20 to 120 °C	-200 to 200 °C	-10 to 120 °C	Standard (-10 to 120 °C) Heat Resistant (-100 to 150 °C)
Accuracy	Medium	Low	Medium–High	Medium–High
Cost \$	\$\$	\$	\$\$\$\$	\$\$\$\$

Unit Conversions: °F = (°C \* 1.8) + 32 (Example: °F = (100°C \* 1.8) + 32 = 212°F)

\*Stroke bushings can handle rotary motion

**Linear Bushings**

**#LHFC**  
Flanged Linear Bushings – Single

**#LHFW**  
Flanged Linear Bushings – Double

**#LHIF**  
Flanged Linear Bushings with Pilot-Single

**#LHIW**  
Flanged Linear Bushings with Pilot-Double

**#LHMW**  
Flanged Linear Bushings – Center Flange

**#LHRK**  
Compact, Single

**#LHFD**  
Flanged Linear Bushings – Medium Lg.

**#LHIC**  
Flanged Linear Bushings with Pilot, Medium Lg.

**#LHMC**  
Flanged Linear Bushings – Medium Lg., Center Flanged

**#LHKC**  
Flanged Linear Bushings, Long Lg.

**#LHKM**  
Flanged Linear Bushings with Long Pilot, Long Lg.

**#LMU**  
Linear Bushings – Standard, Single

**#LMUW**  
Linear Bushings – Standard, Double

**#LMUT**  
Linear Bushings – Short

**#LMUD**  
Linear Bushings – Medium

**#LMK**  
Linear Bushings – Compact, Single

**#LHBB**  
Wide Pillow Block Bushings

**#LHBBW**  
Long and Wide Pillow Block Bushings

**#LHSS**  
Pillow Block Bushings



**#LHSW**  
Pillow Block Bushings, Double



**#LHSD**  
Pillow Block Bushings, Tall Block



**#LHGS**  
Pillow Block Bushings, Wide Mount



**#LHSL**  
Pillow Block Bushings with Clamp



**#LHBBC**  
Wide Pillow Block Bushings with Clamp



**#LHRC**  
Flanged Linear Bushings with Clamp Lever



**#LCSC**  
Height Adjust Spacer for Linear Bushings



**#LBS**  
Spacers for Linear Bushings



**#LMST**  
Stoppers for Linear Bushings



**#LMUM**  
Linear Bushings with MX Unit



**#LHFX**  
Flanged Linear Bushings with MX Unit



**#LHFM**  
Flanged Linear Bushings-Double w/ MX Unit



**#LHMM**  
Flanged Linear Bushings w/ MX Unit-Center Flange



**#LHIM**  
Flanged Linear Bushings w/ MX Unit- w/Pilot



**#LHIX**  
Flanged Linear Bushings w/ MX Unit-Double Bushing w/ Pilot



**#LHSM**  
Pillow Block w/MX Unit



**#LHBM**  
Wide Pillow Block w/ MX Unit



**#LBUS**  
Stroke Ball Bushings



**#LBHR**  
Flanged Stroke Ball Bushings

**Ball Guides**



**#BGZ**  
Miniature Ball Bearing Guide Sets



**#BGA**  
Miniature Ball Bearing Guide Sets - One End Tapped



**#BGY**  
Miniature Ball Bearing Guide Sets - Both Ends Tapped



**#BGSZ**  
Miniature Ball Bearing Guide Sets - With Retaining Ring



**#BGBP**  
Shafts for Miniature Ball Bearing Guides - Straight



**#BGST**  
Miniature Ball Bearing Guide Sets - With Retaining Ring



**#BGDP**  
Shafts for Miniature Ball Bearing Guides - One End Tapped



**#BGEP**  
Shafts for Miniature Ball Bearing Guides - One End Threaded



**#BGAP**  
Hollow Shafts for Miniature Ball Bearing Guides - One End Tapped



**#BGFP**  
Shafts for Miniature Ball Bearing Guides - Both Ends Tapped



**#BGHP**  
Shafts for Miniature Ball Bearing Guides - One End Threaded, One End Tapped



**#BGCP**  
Hollow Shafts for Miniature Ball Bearing Guides - Both Ends Tapped Hollow



**#BGB**  
Bushings for Miniature Ball Bearing Guides



**#BGFT**  
Flanged Bushings for Miniature Ball Bearing Guides







# Ball Splines

**#BGS**  
Miniature Ball Bearing Guide Components – Ball Slider


**#BYS**  
Miniature Ball Bearing Guide – Ball Slider Compact




**#BHSM**  
Ball Splines – Standard




**#BSHM**  
Ball Splines – Both Ends Tapped




**#BSFM**  
Ball Splines – One End Tapped




**#BSJM**  
Ball Splines – Both Ends Stepped




**#BSDM**  
Ball Splines – One End Stepped




**#BSLM**  
Ball Splines – Both Ends Stepped and Tapped



**#BSBM**  
Ball Splines - One End Stepped and Threaded, One End Tapped



**#BSYM**  
Ball Splines – Both Ends Stepped and Threaded







**#BSKM**  
Ball Splines – One End Stepped and Threaded



**#RGPF**  
Needle Bearing Guide Sets

**EX** Example

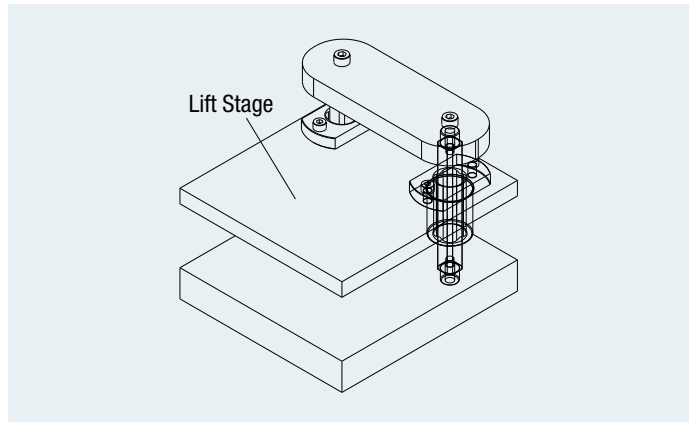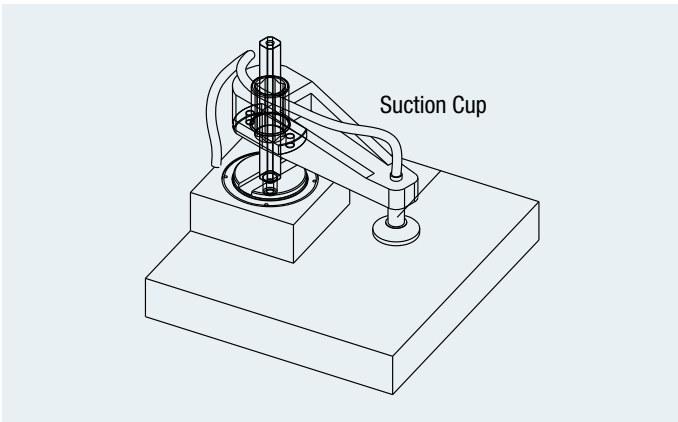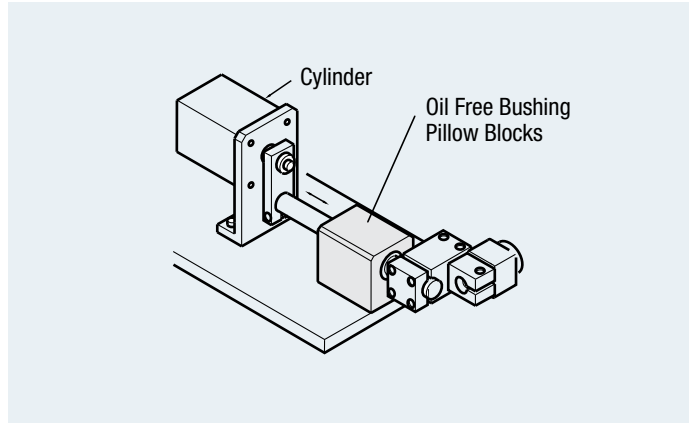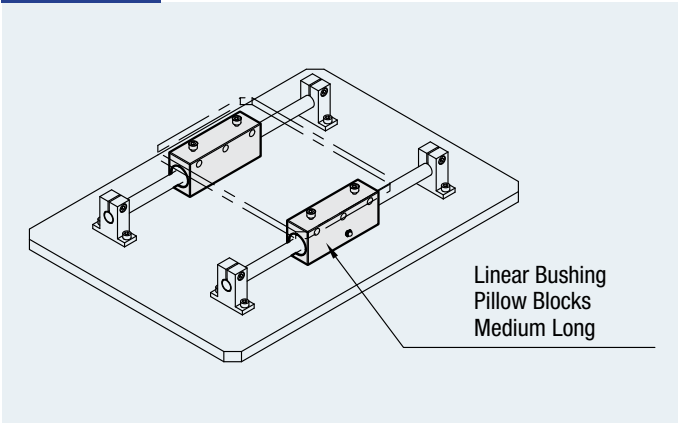

Enter Web Code (ex. #SFJ)



Oil-Free Bushings / Washers

Product Name	Copper Alloy (Bronze)	Copper Alloy (Brass)	Cast Iron	Multi-Layer (PTFE Filler)	Multi-Layer (Fluororesin Filler)	Resin (Polyacetal)	Resin (PTFE)	
Usage, Picture								
Typical Usage	Best suited for high speed and low load applications when lubricated.	Best suited for high load and low speed applications.	Best suited for medium load and low speed applications.	Thin wall and light weight. Best suited for high load and low speed applications.	Thin wall and light weight. Best suited for high speed applications.	Light weight. Best suited for high speed and food applications.	Light weight. Best suited for high speed and food applications.	
Lubrication Type	Grease Oil	Grease Oil	Grease Oil	Lube Free	Lube Free	Lube Free	Lube Free	
Rotation, Oscillating & Reciprocation Motion	•	•	•	•	•	•	•	
Recommended Mating Shaft Tolerance	f8, g6	d8, e7, f8, g6	e7, h7, g6	f8	f8, h7, g6	h7, g6	g6	
Operating Temp.	-40 to 150 °C	-40 to 150 °C -40 to 200 °C	-40 to 150 °C	-195 to 280 °C	-50 to 140 °C	-40 to 80 °C	-200 to 200 °C	
Load vs. Velocity	Allowable Load [N/mm <sup>2</sup> ]	10.0	29.0, 98.0*	5.0 8.0	49.0, 137.0*	6.0	17.5 7.0	
	Allowable Speed [m/s]	1.66 5.00	0.50 1.00	0.15 0.25	0.65	3.33	0.85 1.65	
	Allowable PV Value [N/mm <sup>2</sup> * m/s]	1.65 3.25	1.65 3.25	0.50 0.80	3.60	0.98	2.45 1.00	
Environmental Conditions	Air	G	G	G	G	G	G	
	Oil	G	G	G	G	P	G	
	Water	P	P	—	P	A	A	G
	Seawater	P	P	—	P	P	A	G
	Chemicals	P	P	—	P	A	A	G
	Corrosive Atmosphere	P	A	—	P	A	A	G
Cost \$	\$\$	\$\$	\$\$\$	\$	\$\$\$\$	\$	\$\$	

\*Allowable static surface pressure (no sliding motion or extremely low speed)

Unit Conversions: 1. °F = (°C \* 1.8) + 32 (Example: °F = (100°C \* 1.8) + 32 = 212°F) 2. kgf = N x 0.10192

● Good ● Acceptable ● Poor

## Oil-Free Bushings / Washers



★ ✔

**#MPBZ**  
Oil-Free Bushings – Copper Alloy, Standard, I.D. F7, O.D. m6



★ ✔

**#MPFZ**  
Oil-Free Bushings – Copper Alloy, Flanged



★ ✔

**#MPBU**  
Oil-Free Bushings – Copper Alloy, Thin Wall, I.D. F7, O.D. m6



✔

**#MPBR**  
Oil-Free Bushings – Copper Alloy, I.D. E7



**#MPBP**  
Oil-Free Bushings – Copper Alloy, Standard, I.D. G6, O.D. h6



✔

**#MPFU**  
Oil-Free Bushings – Copper Alloy, Flanged, Thin Wall



★

**#MPGZ**  
Oil-Free Bushings – Copper Alloy, Thrust



★

**#MPTP**  
Oil-Free Bushings – Copper Alloy Standard, Flanged I.D. F7



**#MPIZ**  
Flanged Oil-Free Bushings with Pilot



**#MPCZ**  
Flanged Oil-Free Bushings – Center Flange



✔

**#MPWZ**  
Oil-Free Copper Alloy Washers



✔

**#SHBR**  
Oil-Free Bushings – Bronze, Straight, O.D. m6



✔

**#SHFZ**  
Oil-Free Bushings – Bronze, Flanged



**#SHTZ**  
Oil-Free Bronze Bushings with Mounting Flange



**#MFCK**  
Center Flanged Oil-Free Bushings – Double Bushing



★

**#MFKL**  
Oil-Free Bushings – Flanged, Standard



**#MFIK**  
Pilot, Flanged Oil-Free Bushings – Single Bushing



**#MHUT**  
Oil-Free Bushing Pillow Block – Tall Block, Single Bushing



**#MHUA**  
Oil-Free Bushing Wide Pillow Block – Single Bushing



**#MHCT**  
Oil-Free Bushing Compact Pillow Block



**#MHCA**  
Oil-Free Bushings Wide Pillow Block



**#SMZ**  
Oil-Free Metal Bushings



**#MDZB**  
Multi-Layer LF Bushings – Straight



**#MHRS**  
Metal Bushings with Mounting Flanged



**#MDZF**  
Multi-Layer LF Bushings – Flanged



**#SMZH**  
Oil-Free Bushings – Casting, Flanged



**#MDZW**  
Thrust Washers – Multi-Layer LF



**#BFLB**  
Oil-Free Bushings – High Precision



**#MDCA**  
Flanged Housings with Oil-Free Bushings



**#MDBA**  
Wide Pillow Blocks with Oil-Free Bushings



**#MDBC**  
Compact Pillow Blocks with Oil-Free Bushings



**#MDWB**  
Tall Pillow Blocks with Oil-Free Bushings



**#JZB**  
Oil-Free Bushings – Polyacetal Resin, Straight



**#JZF**  
Flanged Housings – Polyacetal Resin, Flanged



**#JZW**  
Oil-Free Resin Washers



**#TFZB**  
Oil-Free Bushings – PTFE Resin, Straight



**#JFMA**  
Pillow Blocks with Resin Bushings



**#TFZF**  
Oil-Free Bushings – PTFE Resin, Flanged



**#JFBA**  
Flanged Housing Unit with Resin Bushings

Oil-Free Plates / Guide Rails



**#GRR1**  
Guide Rails – Standard with Dowel Hole



**#GRRM**  
Guide Rails – Steel, Oil Groove



**#GRMZ**  
Guide Rails – Lubrication-Free Copper Alloy



**#GRRP**  
Guide Rails – Plastic



**#GRRF**  
Guide Rails – Length and Screw Hole Pitch Configurable



**#SGRM**  
Guide Rails – Oil-Free Copper Alloy




**#GRMF**  
Guide Rails – Copper Alloy, Length and Screw Hole Pitch Configurable



**#SLD**  
Guide Rails – Block



**#STRL**  
Oil-Free Slide Plates – Copper Alloy (Top-Bottom Surface Ground)



**#GRPZ**  
Oil-Free Slide Plates – Copper Alloy Configurable



**#UTW**  
Oil-Free Slide Plates – Copper Alloy (Top-Bottom Surface Ground)




**#STW**  
Oil-Free Slide Plates – Copper Alloy



**#GRFZ**  
Oil-Free Slide Plates – Multi-Layer



**#SGRA**  
Gibs



Product Name	Motorized Stages	LX Actuator	KU Actuator	RS Actuator	MSA Belt-Driven Actuator	
Usage, Picture						
Typical Usage	Ideal for short positioning motions where high accuracy and repeatability are key.	High precision, compact linear motion unit.	High moment load, precision linear motion unit.	Fully integrated system with motor and controller.	Ideal for long stroke, fast motion and high acceleration.	
Integrated Motor	Yes	Optional	Optional	Yes	Optional	
Drive Mechanism	- Precision Ball Screw - Worm Gear	- Precision Ball Screw	- Rolled/Precision Ball Screw	- Rolled/Precision Ball Screw - Belt	- Belt	
Pneumatic Options	No	No	Yes	No	No	
Specifications	Positioning Repeatability	0.5 microns	3 to 5 microns	5 to 8 microns	10 to 40 microns	25 microns
	Stroke Range	13 to 50 mm	17 to 530 mm	130 to 610 mm	50 to 1,050 mm (Screw) 150 to 3,050 mm (Belt)	184 to 5,992 mm
	Max. Speed	10 mm/sec	1,040 mm/sec	1,550 mm/sec	1,800 mm/sec	15,000 mm/sec
Actual Load/ Basic Load Ratings	Up to 10kg (Horizontal) Up to 5kg (Vertical)	Check Online for Sizing Software		Up to 80 kg (Horizontal) Up to 30kg (Vertical)	Up to 1,130kg (Horizontal) Up to 567kg (Vertical)	

\*NEMA/Metric Standard motor plates for LX, KU and MSA, can be specified to match your motor.

**Linear Actuators**



**#ACLX**  
High Precision Ball Screw Actuators & Accessories



**#ACRS**  
RS Actuators



**#MSA**  
Belt Driven Actuators



**#ACKU**  
High Moment Load Ball Screw Actuators

**#MSG**  
Motorized Stages

**#SV**  
Servo Motors & Drivers

**#ST**  
Stepper Motors & Drives



Linear Guides



**#REB**  
With Low Temperature Black Chrome Plating



**#SEB**  
Standard Block, Light Preload



**#SEBN**  
Standard Block with Dowel Holes



**#SELB**  
Long Blocks



**#SEL1**  
Long Block with Dowel Holes



**#SEBS**  
Short Block



**#SEB1**  
Short Block with Dowel Holes



**#SEBM**  
Wide Block



**#SELM**  
Wide Long Block



**#SECB**  
Extra Long Block, Light Preload



**#SEBW**  
Wide Rails, Standard Blocks, Light Preload



**#SEB3**  
Wide Rails, Standard Block with Dowel Holes



**#SEB2**  
Wide Rails, Wide Block



**#SELW**  
Wide Rails, Long Blocks, Light Preload



**#SEL3**  
Wide Rails, Long Block with Dowel Holes



**#SEL2**  
Wide Rails, Long Wide Block



**#SVR**  
For Medium Load (Max Height 33mm)



**#SRZL**  
For Medium Load, with Resin Retainers (Max Height 42mm)



**#SXR**  
For Heavy Load (Max Height 33mm)



**#SXR B**  
For Heavy Load with Resin Retainers (Max Height 42mm)



**#SHR B**  
For Ultra Heavy Load with Resin Retainers (Max Height 42mm)



**#SER B**  
For Super Heavy Load with Resin Retainers (Max Height 42mm)



**#SSVR**  
For Medium and Heavy Load, Stainless Steel



**#SSRZ**  
For Medium Load, Stainless Steel with Resin Retainer



**#SSXR**  
For Heavy Load, Stainless Steel with Resin Retainer



**#SSHR**  
For Ultra Heavy Load, Stainless Steel with Resin Retainer



**#SVRN**  
For Medium Load, Dowel Hole



**#SSEB**  
Heat Resistant



**#SEBD**  
Dust Resistant Standard Blocks, Light Preload, Advanced Selectable L



**#SVRD**  
For Medium Load, Dust Resistant



**#SXR D**  
For Heavy Load, Dust Resistant



**#SECK**  
Clamping Units for Miniature Linear Guides



**#SVCK**  
Clamping Units for Medium/Heavy Load Linear Guides



**#LGBE**  
Height Adjusting Blocks for Linear Guide, Economy



Linear Guides

Cross Rollers

Telescopic Slide Rails

Slide Packs / V Guides / Linear Rails



**#BETA**  
Height Adjusting Blocks for Linear Guides



**#GETA**  
Height Adjusting Blocks for Miniature Linear Guides



**#SBLT**  
Stopper Bolts for Linear Guides



**#SVP**  
Linear Guide Block Stopper Plates



**#PSGL**  
Slide Guide Mounting Hole Caps (Pack)



**#SGU**  
Linear Guide Lock Units



**#LLT**  
Linear Locks



**#LLTA**  
Simplified Linear Locks



**#LLPU**  
Linear Guide Lock Plates, Threaded



**#LLPL**  
Linear Guide Lock Plates, Grooved



**#LLTG**  
Linear Lock Lock Units



**#LLKA**  
Linear Guide Lock Plates, Counterbored

Cross Rollers



**#CRT**  
Cross Roller Tables with Counterbored Holes and Tapped Holes



**#CRU**  
Cross Roller Tables



**#CRV**  
Cross Roller Guides



**#BSG**  
Ball Slide Guides with Counterbored Holes and Tapped Holes

Telescopic Slide Rails



**#SAR2**  
Telescopic Slide Rails – Aluminum Alloy, Light Load, Two Step



**#SAR3**  
Telescopic Slide Rails – Light Load, Aluminum Alloy



**#SRY2**  
Telescopic Slide Rails – Light Load



**#SSRP**  
Telescopic Slide Rails – Light Load



**#SRXY**  
Telescopic Slide Rails – Light Load, Three Step Slide



**#SSRX**  
Telescopic Slide Rails – Light Load, Stainless Steel



**#SR36**  
Telescopic Slide Rails – Medium Load, Steel, Two Step Slide



**#SSRN**  
Telescopic Slide Rails – Medium Load, Stainless Steel, Two Step Slide



**#SRX3**  
Telescopic Slide Rails – Medium Load, Steel, Three Step Slide



**#SSR3**  
Telescopic Slide Rails – Medium Load, Stainless Steel, Three Step Slide



**#SRR3**  
Telescopic Slide Rails with Lock Mechanism



**#SRH1**  
Telescopic Slide Rails – Heavy Load, Three Step Slide



**#SSRR**  
Telescopic Slide Rails – Stainless Steel with Lock Mechanism



**#SSRH**  
Telescopic Slide Rails – Heavy Load, Stainless Steel, Two Step Slide

Slide Packs / V Guides / Linear Rails



**#SROM**  
Simplified Slide Rails – Aluminum, Oil-Free



**#KSRM**  
Simplified Slide Rails – Stainless Steel Retainer Sets

Enter Web Code (ex. #SFJ)



**#RSR**  
Roller Slide Rails



**#PLRC**  
Linear Slide Rails – Preload,  
Stainless Steel Bearing



**#KSRL**  
Simplified Slide Rails –  
Aluminum with Ball Bearing



**#KSR**  
Simplified Slide Rails – Aluminum,  
Bearing



**#JKSC**  
Simplified Slide Rails – Aluminum  
Block and Rail with Ball Bearings



**#BJKR**  
Simplified Linear Guides –  
Steel with Ball Rollers



**#BVGH**  
V Guide Systems – Stainless Steel  
Wheel



**#BVGB**  
V Guide Systems – Bushing



**#BVGT**  
V Guide Systems – Track with  
Mounting Hole, L Configurable



**#BVGR**  
V Guide Systems –  
Double Sided Tracks




**#BVGU**  
V Guide System Units – Set



**#MVH**  
V Guide Systems – 70° Wheels,  
Short



**#MVR**  
V Guide Systems – 70° Wheels,  
Double Sided Track



**#SE14**  
With Split Opening



**#MHPK**  
Compact, No-Flaps



**#MHPU**  
With Flaps and Mounting Brackets



**#FHPS**  
Fully Enclosed, with Flaps



**#MPSC**  
Low Particles, Low Noise





**#FHP2**  
Low Friction, Low Noise



**#CBC**  
Supporter Channels

Slide Packs / V Guides / Linear Rails  
Cable Carriers

**ex** Example

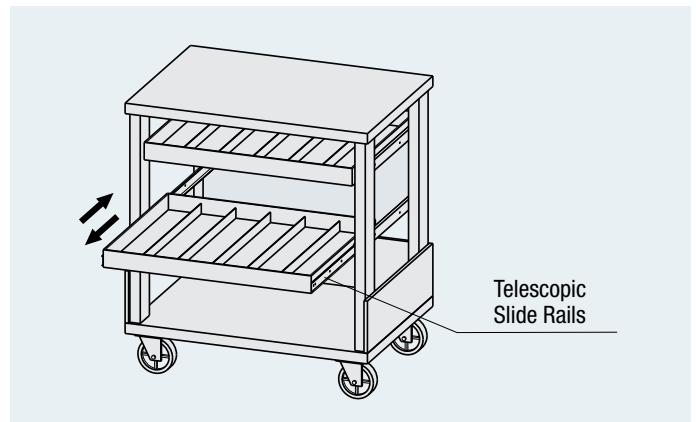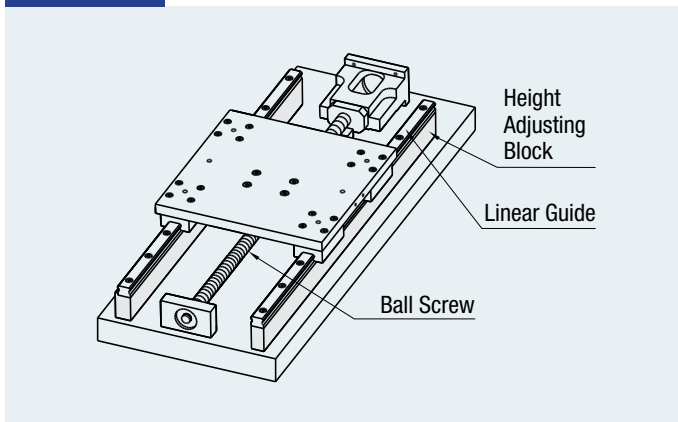



Screw Shaft Length				Screw Shaft Machined										Support Units									
Screw Shaft Dia. (mm)	6	8		10		12		14		15		20		25		28		32					
Lead (mm)	1	1	2	4	2	4	10	2	4	5	10	5	5	10	20	5	10	20	25	6	10	32	
Max. Length (mm)	205	255	400	380	585	600	585	445	800	450	800	800	1200		2000		2000		1500	2000	2000	2000	
Rolled Ball Screw			•	•	•	•		•		•	•	•	•	•	•	•	•	•		•	•	•	•
Precision Ground Ball Screw	•	•	•		•	•	•	•	•	•			•	•	•	•	•	•					
Accuracy Grade (C3,C5,C7,C10)	C3	C3	ALL	C10	C3 C5	C5 C7 C10	C10	C3 C5 C7	C5 C7 C10	ALL	C5 C7 C10	C10	ALL	C5 C7 C10	C5 C7 C10	C5 C7 C10	C5 C7 C10	C10	C10	C10	C10	C10	
Support Unit (size)	Rolled Ball Screw	—		6		8, 8S		10, 10S		12		15		20		20		25		—		—	
	Precision Ground Screw	6	8		8, 8S		10S	10	8 (10 for C3)	10S (8 for C3)		—	12		15		20		—		—		

**EX: Accuracy vs. Price**

Type	Ball Screw Size (mm)	Max. Length Available (mm)	Accuracy Grade	Axial Clearance (mm)	Price Level
Rolled	15 x 5	1200	C7	0.03 or Less	\$
		1200	C10	0.10 or Less	\$
Precision Ground	15 x 5	590	C3	0 (Preload)	\$\$\$\$
		1095	C5	0.005 or Less	\$\$\$
		1095	C7	0.030 or Less	\$\$\$

**Ball Screws**



**#BC08**  
Rolled Ball Screw – Compact Nuts,  
Shaft Dia. 8, Lead 2



**#BR08**  
Rolled Ball Screws –  
Shaft Dia. 8, Lead 2 or 4



**#BC10**  
Rolled Ball Screw – Compact Nut,  
Shaft Dia. 10, Lead 4



**#BR10**  
Rolled Ball Screw – Shaft Dia. 10,  
Lead 2, 4 or 10



**#BC12**  
Rolled Ball Screw – Compact Nut,  
Shaft Dia. 12, Lead 4



**#BR12**  
Rolled Ball Screw – Shaft Dia. 12  
or 14, Lead 4, 5 or 10



**#BC15**  
Rolled Ball Screw – Compact Nut,  
Shaft Dia. 15, Lead 5, 10



**#BR15**  
Rolled Ball Screw – Shaft Dia. 15,  
Lead 5, 10 or 20



**#BC20**  
Rolled Ball Screw – Compact Nut,  
Shaft Dia. 20, Lead 5, 10



**#BR20**  
Rolled Ball Screw – Shaft Dia. 20,  
Lead 5, 10 or 20



**#BC25**  
Rolled Ball Screw – Compact Nut,  
Shaft Dia. 25, Lead 5



**#BR25**  
Rolled Ball Screws – Shaft Dia. 25,  
Lead 5, 10 or 25, C7 or C10



**#BR28**  
Rolled Ball Screw – Shaft Dia. 28  
or 32, Lead 6, 10 or 32



**#BSBR**  
Rolled Ball Screw – Shaft Dia. 15, 20  
or 25, Lead 5 or 10



**#FBSS**  
Rolled Ball Screws – Shaft Ends  
Configurable, Standard Nuts



**#BSS0**  
Precision Ball Screws –  
Shaft Dia. 6 or 8, Lead 1 or 2



**#BS10**  
Precision Ball Screws –  
Shaft Dia. 10, Lead 2, 4 or 10



**#BS12**  
Precision Ball Screws –  
Shaft Dia. 12, Lead 2, 4, 5 or 10



**#BS15**  
Precision Ball Screws –  
Shaft Dia. 15, Lead 5, 10, 20 or 40





**#BS20**  
Precision Ball Screws –  
Shaft Dia. 20, Lead 5, 10, 20



**#BS25**  
Precision Ball Screws –  
Shaft Dia. 25, Lead 5, 10, 20



**#BNFA**  
Ball Screw Nut Brackets

Support Units



**#BSW**  
Support Units – Fixed Side, Square



**#BUN**  
Support Units – Square, Support  
Side, Standard



**#BRW**  
Support Units – Fixed Side, Round



**#BUR**  
Support Units – Round, Support Side,  
Standard



**#BSQ**  
Support Units – Square, Fixed Side,  
Compact



**#BSV**  
Support Units – Square, Fixed Side,  
Low Profile



**#BSA**  
Support Units – Square, Fixed Side,  
4 Mounting Holes



**#BUQ**  
Support Units – Square, Support  
Side, Compact, Low Profile



**#BUV**  
Support Units – Square, Support  
Side, Low Profile



**#BUA**  
Support Units – Square, Support  
Side, Mounting Hole Narrow Pitch



**#BSWD**  
Standard Units with Dampers –  
Fixed Side, Economy, Square



**#BSWG**  
Support Units – Fixed Side, Square  
with Dowel Holes



**#BUND**  
Support Units with Dampers –  
Support Side, Square



**#BTN**  
Support Units – Square, Support Side  
Retaining Ring



**#BSWE**  
Support Units – Fixed Side,  
Economy, Square



**#BSWZ**  
Support Units – Fixed Side, Radial  
Bearing



**#BRWE**  
Support Units – Fixed Side,  
Economy, Round



**#BRWZ**  
Support Units with Radial Bearings  
– Fixed Side, Economy, Round



**#BTR**  
Support Units – Round, Support Side  
Retaining Ring



**#BJS**  
For Ball Screws and Motors



**#BSTP**  
Stopper for Ball Screws



**#BSC**  
Spacers for Ball Screw  
Support Units

Enter Web Code (ex. #SFJ)



Lead Screws / Slide Screws

Product Name	Slide Screws	Lead Screws	Ball Screws
Page	pg. XX	pg. XX	pg. XX
Usage/Picture			
Max. Available Size (Dia x Length) (mm)	12 x 550 mm	50 x 1200 mm	32 x 2000 mm
Accuracy	Medium	Medium	High
Allowable Rotational Speed	Low Speed	Medium Speed	High Speed
Max Allowable Axial Load (Ref. Only)	540 N	30,000 N	9,960 N
Efficiency	0.7	0.8	0.95
Friction	High	High	Low
Grease	Not Required	Not Required	Required
Noise Level	Low	Low/Medium	High
Cost \$	\$\$	\$	\$\$\$\$

**Lead Screws / Slide Screws**



**#MTWK**  
Lead Screw, Ends Fit Support Units



**#MTWZ**  
Lead Screws – Fixed Side Support Units



**#MTUZ**  
Lead Screws – Support Side Support Units



**#MRWZ**  
Round Support Units – Fixed Side

**NEW**



**#MRUZ**  
Lead Screw Support Units – Round, Support Side

**NEW**



**#MTSC**  
Compact Flanged Lead Screw Nuts

★



**#MTS5**  
Flanged Lead Screw Nuts with Pilot, Right-Hand Thread



**#MTSJ**  
Flanged Lead Screw Nuts – Slotted Holes, Right-Hand Thread



**#MTRF**  
Flanged Lead Screw Nuts – Fine Pitch



**#MTSE**  
Flanged Lead Screw Nuts – with Tapped Holes, Right-Hand Thread



**#MTBL**  
Lead Screw Nuts – Anti-Backlash



**#MTSM**  
Oil-Free Lead Screw Nuts – Flanged



**#MTSS**  
Lead Screw Nuts – Straight



**#MTS3**  
Resin Lead Screw Nuts – Heavy Load

★



**#MTSF**  
Resin Lead Screw Nuts



**#MTSN**  
Block Style Lead Screw Nuts



**#MTSH**  
Wide Block Lead Screw Nuts



**#DNBA**  
Lead Screw Nut Brackets



**#MTKL**  
Spacers for Wide Block



**#MTS1**  
Lead Screws – Multi-Pitch, Both Ends Stepped



**#MTS4**  
Lead Screws – Right and Left-Hand Thread, Center h7, Both Ends Stepped



**#MTSK**  
Lead Screws – One End Stepped, One End Double Stepped



**#MTSA**  
Lead Screws – Right and Left-Hand Thread, Center h7, One End Stepped, One End Double Stepped



**#MTSRA**  
Lead Screws – One End Stepped



**#MTS2**  
Lead Screws – One End Double Stepped



**#MTSX**  
Lead Screws – Both Ends Double Stepped



**#MTSR**  
Lead Screws – Straight



**#MTSW**  
Lead Screws – Straight, Right and Left-Hand Thread



**#DPLL**  
Large Digital Positioning Indicators – Standard



**#DPRL**  
Large Digital Positioning Indicators – Front



**#DPZL**  
Large Digital Positioning Indicators – Vertical



**#DPNL**  
Digital Positioning Indicators



**#DPML**  
Digital Positioning Indicators – Front Display



**#DPTL**  
Large Digital Positioning Indicators – Vertical Spindle



**#DPQK**  
Clamp Plates for Large Positioning Indicators with Lever



**#DPQB**  
Clamp Plates for Large Positioning Indicators with Lever and Bearing



**#DPNK**  
Clamp Plates for Compact Positioning Indicator with Lever



**#DPNB**  
Clamp Plates for Compact Positioning Indicator with Lever and Bearing



**#MTQD**  
Stop Plate For Lead Screws



**#MTQA**  
Stop Plates for Lead Screws – Round, Flanged



**#MTSWB**  
Stop Plate Sets for Lead Screw – Two Screw Mount



**#MTSB**  
Stop Plates for Lead Screws – Square



**#MSSA**  
Miniature Slide Screws with Nuts – One End Stepped




**#MSSR**  
Miniature Lead Screws with Nuts – Straight



**#MSSW**  
Miniature Slide Screws with Nuts – Both Ends Stepped

**ex!** Example

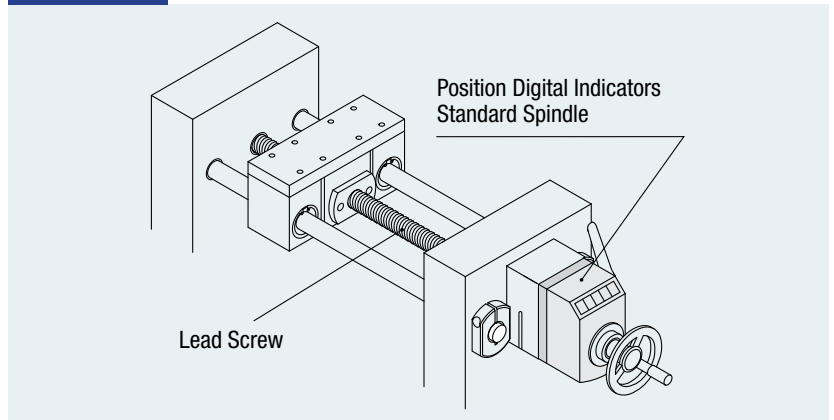





**Rotary Shafts / Drive Shafts**




**#HFR**  
Rotary Shafts – Straight



**#SFGK**  
Rotary Shafts – Straight with Key Grooves




**#SFRR**  
Rotary Shafts – with Retaining Ring Grooves



**#SFGR**  
Rotary Shafts – with Retaining Ring Grooves and Key Grooves




**#HFRT**  
Rotary Shafts – One End Tapped




**#SFGT**  
Rotary Shafts – One End Tapped with Key Grooves



**#HFRW**  
Rotary Shafts – Both Ends Tapped



**#SFGW**  
Rotary Shafts – Both Ends Tapped with Key Grooves



**#HFRP**  
Rotary Shafts – One End Stepped




**#SFRF**  
Rotary Shafts – One End Stepped, One End Tapped




**#HFRN**  
Rotary Shafts – One End Stepped and Threaded




**#SFRD**  
Rotary Shafts – One End Stepped and Threaded, One End Tapped



**#SFRG**  
Rotary Shafts – One End Stepped and Tapped



**#SFRA**  
Rotary Shafts – One End Stepped, Both Ends Tapped



**#HFRQ**  
Rotary Shafts – Both Ends Stepped



**#HFRM**  
Rotary Shafts – Both Ends Stepped and Threaded




**#SFRH**  
Rotary Shafts – Both Ends Stepped and Tapped



**#SFRX**  
Rotary Shafts – One End Stepped with Retaining Ring Groove



**#SFRZ**  
Rotary Shafts – Both Ends Stepped with Retaining Ring Groove




**#SFRE**  
Rotary Shafts – Both Ends Stepped, One End Threaded



**#SFRB**  
Rotary Shafts – Both Ends Stepped, One End Threaded, One End Tapped




**#SFRJ**  
Rotary Shafts – Both Ends Double Stepped




**#PFR**  
Hollow Rotary Shafts – Straight




**#SFRV**  
Rotary Shafts – D Cut



**#SFRT**  
Rotary Shafts for Tension



**#SFRM**  
Rotary Shafts for Tension – Push, Pull



**#SFR1**  
Rotary Shafts – End Shape Selectable



**#KZAC**  
Drive Shafts – Straight



**#KZBC**  
Drive Shafts – One End Stepped



**#KZCC**  
Drive Shafts – Both Ends Stepped



**#KZDC**  
Drive Shafts – One End Stepped, One End Double Stepped



**#KZEC**  
Drive Shafts – Flanged



**#KZFC**  
Drive Shafts – One End Stepped with Flange



Cantilever Shafts



**#FXAA**  
Standard Shoulder, Threaded with Retaining Ring Groove



**#FXBA**  
Stepped Shoulder, Threaded with Retaining Ring Groove



**#LXAA**  
Hex Shoulder, Threaded with Retaining Ring Groove



**#FXAB**  
Standard Shoulder, Threaded with Tapped End



**#FXBB**  
Stepped Shoulder, Threaded with Tapped End



**#LXAB**  
Hex Shoulder, Threaded with Tapped End



**#FXAC**  
Standard Shoulder, Both Ends Threaded



**#FXBC**  
Stepped Shoulder, Both Ends Threaded



**#LXAC**  
Hex Shoulder, Both Ends Threaded



**#FXCA**  
Standard Shoulder, with Pilot, Threaded with Retaining Ring Groove



**#FXDA**  
Stepped Shoulder – Pilot, Threaded with Retaining Ring Groove



**#LXCA**  
Hex Shoulder- Pilot, Threaded with Retaining Ring Groove



**#FXCB**  
Standard Shoulder – Pilot, Threaded with Tapped End



**#FXDB**  
Stepped Shoulder – Pilot, Threaded with Tapped End



**#LXCB**  
Hex Shoulder – Pilot, Threaded with Tapped End



**#FXCC**  
Standard Shoulder – Pilot, Both Ends Threaded



**#FXDC**  
Stepped Shoulder – Pilot, Both Ends Threaded



**#LXCC**  
Hex Shoulder – Pilot, Both Ends Threaded



**#FXHA**  
Bolt Mount, Standard with Retaining Ring



**#FXJA**  
Bolt Mount, Stepped with Retaining Ring Groove



**#LXHA**  
Bolt Mount, Hexagon with Retaining Ring Groove



**#FXHB**  
Bolt Mount, Tapped End



**#FXJB**  
Bolt Mount, Stepped with Tapped End



**#LXHB**  
Bolt Mount, Hexagon with Tapped End



**#FXHC**  
Bolt Mount, Standard with Threaded End



**#FXJC**  
Bolt Mount, Stepped with Threaded End



**#LXHC**  
Bolt Mount, Hexagon with Threaded End



**#FXMA**  
Heavy Load with Retaining Ring Groove



**#FXMB**  
Heavy Load with Tapped End



**#FXEA**  
Flanged with Retaining Ring Groove



**#FXEB**  
Flanged with Tapped End



**#FXFC**  
Flanged with Threaded End



**#FXKA**  
For Tension, Threaded with Retaining Ring



**#FXKB**  
For Tension, Threaded with Tapped End



Fulcrum Pins

Hinge Pins

Fulcrum Pins



#CBD  
Standard Thread Length



#FCBD  
Configurable Thread Length



#CBDW  
Wrench Flats



#CBDR  
Hex Socket



#CBDL  
Hex Head



#CMSG  
Low Head, Stepped

Hinge Pins



#CMG  
Straight, Cotter Pins



#CCG  
Straight, Retaining Rings



#HMG  
Flanged, Cotter Pin



#HCCG  
Flanged, Retaining Ring



#CLBD  
Flanged, Threaded with Lock Nut



#CLBR  
Flanged, Hex Socket Head,  
Threaded with Lock Nut



#CLBK  
Low Hex Socket Head, Threaded with  
Lock Nut



#HCLB  
Flanged, Tapped



#CLB2  
Flanged, Hex Socket Head, Tapped



#CLBM  
Both Ends Tapped



#CLBN  
Both Ends Threaded



#CLKG  
With Keyway



#HPK  
Keys



#CLSG  
Straight with Set Screw Flat



#HCLS  
Flanged, Set Screw Flat



#CLSW  
Two Set Screw Flats, D-Cut



#FCLA  
End Shape Selectable



#KCLB  
D Tolerance Selectable



#CNPR  
With Two Retaining Rings



#CNPP  
With Two Retaining Rings, Tapped  
Ends



Product Name	Ball Bearings				Roller Bearings	Combination Bearings
	Deep Groove Ball Bearings	Self-Aligning	Angular Ball Bearings	Thrust Bearings	Needle Bearings	
Usage, Picture						
Bore Size (mm)	Ø3-50	Ø10-20	Ø10-50	Ø10-30	Ø4-30	Ø7-50
Load Capacity	Radial	G	G	—	—	E
	Axial	F	P	G	E	E
Speed	E	G	E	F	P	F
Accuracy Class	Class 0 (JIS) / ABEC-1 (ASTM)					

● Excellent ● Good ● Acceptable ● Fair ● Poor

**Bearings / Bearings with Housings / Accessories**



**#BGHS**

Bearings with Housings – Block      Bearings with Housings – Flanged      Bearings with Housings – T-Shaped      Bearings with Housings – L-Shaped



**#BGPB**

Pillow Block Bearings



**#BRGS**

Ball Bearings

**#NDBG**

Needle Bearings



**#CFRF**

Cam Followers, Roller Followers



**#BGLN**

Bearing Lock Nuts



**#BGSS**

Bearing Shaft Screws



**#BGRS**

Bearing Spacers



**#BCO**

Bearing Cover Plates

Bearings / Bearings with Housings / Accessories



Product Name	Disc	Flex	Oldham	Jaw	Bellow	Rigid	Universal Joints	Chain Coupling
Usage, Picture								
Bore Size	Ø2-45 mm	Ø2-18 mm	Ø1-38 mm	Ø3-40 mm	Ø3-14 mm	Ø5-24 mm	Ø6-30 mm	Ø14-55 mm
Hybrid Couplings (Inch Bores)	Yes	Yes	Yes	Yes	No	Yes	No	No
Recommended Motor	- Servo Motor - Stepper Motor	- Servo Motor - Stepper Motor	- General Purpose Motor	- Stepper Motor - General Purpose Motor	- Stepper Motor	- Servo Motor - Stepper Motor	- Stepper Motor - General Purpose Motor	- General Purpose Motor
Torque	0.1 to 250 N-m	0.1 to 8 N-m	0.3 to 80 N-m	0.7 to 180 N-m	0.3 to 3 N-m	0.3 to 6 N-m	20 to 495 N-m	100 to 2372 N-m
Zero Backlash	E	E	P	P	G	E	P	P
Angular Misalignment	G	G	E	F	E	P	E	F
Lateral Misalignment	F	F	E	F	F	P	P	F
Axial Misalignment	G	F	G	P	E	P	P	P
Cost \$	\$\$\$	\$\$	\$\$	\$\$\$	\$\$	\$	\$\$	\$\$\$\$

● Excellent ● Good ● Fair ● Poor

## Shaft Couplings



**#MCSL**  
High Torque Disc, Clamping (Double Disc) ★



**#MCSS**  
High Torque Disc, Clamping (Single Disc)



**#CPO**  
Oldham - Clamping/Set Screw



**#CPOS**  
Spacer for Oldham Couplings (CPO, CPOC) ✔



**#CPCX**  
Flex - Clamping, Set Screw ★



**#CPLX**  
Flex Duraluminum - Clamping Long



**#CPLC**  
Flex-Clamping ★



**#CPL**  
Flex-Set Screw



**#CPDW**  
Disc, Clamping



**#SCPS**  
High Rigidity Disc, Clamping



**#SCXW**  
High Positioning Accuracy Disc, Clamping, Keyway



**#CPSH**  
High Rigidity Disc, O.D. 65 mm, Clamping



**#CPAH**  
High Rigidity Disc, O.D. 65 mm, Keyless, Clamping



**#CPSW**  
High Rigidity Disc, O.D. 87mm, Keyway, Clamping



**#CPSN**  
High Rigidity Disc, O.D. 87mm, One Side Keyless, Both Sides Keyless



**#CPAS**  
High Rigidity Disc, O.D.40mm



**#CPDD**  
Disc, Stepped, Clamping



**#MCGL**  
Standard Torque Disc, Set Screw



**#MCGC**  
Standard Torque Disc, Clamping





**#MCKL**  
High Torque Disc, Set Screw



**#MCKC**  
High Torque Disc, Clamping



**#MCO**  
Oldham, Set Screw



**#MCOS**  
Spacer for Oldham Couplings  
(MCO, MCOC)



**#MCOC**  
Oldham, Clamping



**#MCOG**  
High Rigidity, Oldham, Set Screw



**#MCO1**  
High Rigidity, Oldham, Clamping



**#MFJ**  
Oldham, Large Shaft Diameter



**#MFJS**  
Spacer for Oldham Couplings  
(MFJ, MFJC)



**#MFJG**  
Oldham - High Rigidity, Large Bore Sizes



**#CPOC**  
Oldham - Blue/Green Spacer,  
Set Screw and Clamping



**#SCOC**  
Super Short Oldham, Clamping



**#CPF**  
Sleeve, Set Screw



**#CPJL**  
Jaw, Spider



**#CPJ**  
Jaw, Setscrew with Key Groove



**#CPJC**  
Jaw, Clamping with Key Groove



**#MMJN**  
Jaw, Clamping



**#CPN**  
N Couplings (Keyless)



**#BHE**  
Chain Couplings



**#CPR**  
Rigid, Setscrew



**#CPRC**  
Rigid, Clamping



**#CPSR**  
Rigid, Two-Piece Clamping



**#CPND**  
Rigid, One-Piece Long, Clamping



**#UNCA**  
Universal Joints, Set Pin



**#UNKA**  
Universal Joints - Keyway,  
Set Screw




**#CPB**  
Bellows, Set Screw, Clamping



**#MCJN**  
Resin

**ex!** Example

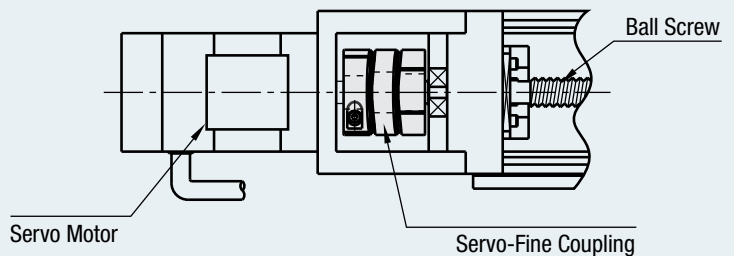



Rollers



#CORO  
Conveyor Rollers





#ROLE  
Rollers



#ENGB  
Bearings with Resin



#BALR  
Ball Rollers



#GURL  
Guide Rollers

#COWH  
Conveyor Wheels

#ROCR  
Roller Carriers

#ROCV  
Gravity Conveyors, Chutes



#ROLJ  
Pipe Rollers with Shafts

#RORS  
Precision Rollers

#USH  
Rollers with Shafts – Urethane, Straight

#USRH  
Rollers with Shafts – Urethane, Configurable Liner Thickness

#BWP  
One-Sided Rollers



#TGR1  
Vertical Guide Rollers – Metal

#TGRU  
Vertical Guide Rollers – Urethane

#RONA  
Belt Tensioners – Screw

#ROBJ  
Belt Tensioners – Spring-Loaded




Type	Standard	Heavy Duty	Built-In Drive	Slim	Dual Track	
Usage, Picture						
Size	Width	30 to 300 mm	100 to 500 mm	60 to 300 mm	10, 20mm	80 to 300 mm
	Length	200 to 3,000 mm	440 to 6,000 mm	370 to 2,000 mm	245 to 2,000 mm	255 to 3,000 mm
	Width Increment	1, 10 mm	100 mm	10 mm	—	1, 10 mm
	Length Increment	5 mm	5 mm	5 mm	5 mm	5 mm
Motor	Power	6, 25, 40 W	60, 90 W	3.5, 6 W	6 W	6, 25, 40 W
	Voltage	100, 110, 115, 200, 220, 230V (Single Phase)		200, 220, 230V (Three Phase)	DC24V (Built-In Drive Only)	
	Speed	— Variable Speed		— Constant Speed		
Position	— End — Center	— End — Center	— Built-In	— End — Center	— End — Center	
Belt Type	— Flat Belts — Guided Flat Belts — Cleated Belts	— Flat Belts — Guided Flat Belts	— Flat Belts	— Timing Belts	— Timing Belts — Plastic Chains	
Recommended Load	Up to 15 kg	Up to 50 kg	Up to 15 kg	Up to 15 kg	Up to 35 kg	

**Belt Conveyors /  
Plastic Chain  
Conveyors**



**NEW** ★

**#SVKA**  
End Drive, 2-Groove Frame,  
Pulley Dia. 30 mm



**NEW** ★

**#SVKB**  
End Drive, Guided Belt, 2-Groove  
Frame, Pulley Dia. 30 mm



**NEW**

**#SVKN**  
Center Drive, 2-Groove Frame,  
Pulley Dia. 30 mm



**NEW**

**#SVKR**  
Center Drive, Guided Belt, 2-Groove  
Frame, Pulley Dia. 30 mm



**NEW**

**#CVGA**  
End Drive, 2-Groove Frame,  
Pulley Dia. 30 mm



**NEW**

**#CVGB**  
End Drive, Guided Belt, 2-Groove  
Frame, Pulley Dia. 30 mm




**#CVGC**  
End Drive, 3-Groove Frame,  
Pulley Dia. 50 mm




**NEW**

**#CVGD**  
End Drive, Guided Belt, 3-Groove  
Frame, Pulley Dia. 50 mm




**NEW**

**#CVGN**  
Center Drive, 2-Groove Frame,  
Pulley Dia. 30 mm




**NEW**

**#CVGP**  
Center Drive, Guided Belt, 2-Groove  
Frame, Pulley Dia. 30 mm



**#CVGR**  
Center Drive, 3-Groove Frame,  
Pulley Dia. 50 mm



**#CVGW**  
Center Drive, Guided Belt, 3-Groove  
Frame, Pulley Dia. 50 mm




**NEW**

**#CVSA**  
End Drive, 2-Groove Frame,  
Pulley Dia. 30 mm



**NEW**

**#CVS3**  
End Drive, Guided Belt, 2-Groove  
Frame, Pulley Dia. 30 mm



**NEW**

**#CVS2**  
End Drive, 3-Groove Frame,  
Pulley Dia. 50 mm




**NEW**

**#CVSD**  
Guided Belt, 3-Groove Frame,  
Pulley Dia. 50 mm




**NEW**

**#CVSE**  
Heavy-Duty End Drive, 3-Groove  
Frame, Pulley Dia. 60 mm, 30 mm



**NEW**

**#CVSF**  
Heavy-Duty End Drive, Guided Belt,  
Pulley Dia. 60 mm, 30 mm



**NEW**

**#CVSX**  
Heavy-Duty Center Drive, 3-Groove  
Frame, Pulley Dia. 30 mm



**NEW**

**#CVSY**  
Center Drive, Heavy-Duty,  
Guided Belt, 3-Groove Frame,  
Pulley Dia. 30 mm



**NEW**

**#CVMA**  
Head Drive, 2-Groove Frame,  
Pulley Dia. 30 mm



**NEW**

**#CVMB**  
Head Drive with Meandering  
Prevention Crosspiece,  
2-Groove Frame



**NEW**

**#CVLP**  
Center Drive, 1-Groove Frame,  
Pulley Dia. 15 mm



**NEW**

**#CVSJ**  
Center Drive, Short Length,  
Guided Belt, 2-Groove Frame,  
Pulley Dia. 30 mm



★

**#CVSM**  
Motor Integrated, 3-Groove Frame,  
Pulley Dia. 70 mm



**NEW**

**#CVSB**  
Built-in Motor, 2-Slot Frame,  
Pulley Dia. 32 mm



**NEW**

**#CVDS**  
End Drive, Guided Belt, 3-Slot  
Frame, Pulley Dia. 50 mm



**NEW**

**#CVS4**  
Timing Belt, Center Drive,  
Belt Pitch Adjustable, Dual Track,  
2-Slot Frame



**NEW**

**#CVGT**  
Timing Belt, End Drive, Dual Track,  
2-Groove Frame



**NEW**

**#CVG2**  
Timing Belt, End Drive, Dual Track,  
3-Groove Frame



**NEW**

**#CVG3**  
Timing Belt Conveyors, Center  
Drive, Dual Track, 2-Groove Frame




**NEW**

**#CVG4**  
Timing Belt Conveyors, Center  
Drive, Dual Track, 3-Groove Frame



**NEW**

**#CVST**  
Timing Belt, Head Drive,  
Single Track, 2, 3-Groove Frame



**NEW**

**#CVSR**  
Timing Belt, Center Drive,  
Single Track, 2, 3-Groove Frame



**NEW**

**#CVSC**  
Plastic Chain, Single Track,  
End Drive, 3-Slot Frame  
(Sprocket Dia. 57 mm)



**#CVSP**  
Plastic Chain, Dual Track,  
End Drive, 3-Groove Frame  
(Sprocket Dia. 57 mm)



**NEW**

**#CVSS**  
Stainless Steel Belt Conveyor,  
End Drive, 3-Groove Frame  
(Pulley Dia. 50 mm)



**#FENB**  
Stainless Steel Sliding Plates



**#FSRP**  
Product Chutes



**NEW**

**#CSTP**  
Conveyor Stands Tube



**NEW**

**#CSTS**  
Conveyor Stands, I-Type



**NEW**

**#CSTW**  
Conveyor Stands, H-Type



**#CGF**  
Conveyor Support Stands



**NEW**

**#LGBR**  
Conveyor L-Type Mounting Brackets



**NEW**

**#CTCA**  
Transparent Covers for Conveyor



**NEW**

**#CGTA**  
Conveyor Work Benches Folding



**NEW**

**#CHOP**  
Conveyor Hoppers



**NEW**

**#CSHW**  
Conveyor Chute



**NEW**

**#CSHRA**  
Angle Adjustment Bracket  
Single Article



**NEW**

**#CDPT**  
Dust Pans



**NEW**

**#CSTE**  
Stoppers



**NEW**

**#CGNR**  
Transfer Rollers



**NEW**

**#CGST**  
Conveyor End Tables



**NEW**

**#CBRN**  
Conveyor Press Rollers - Small



NEW

#BFCB  
Conveyor Sensor Brackets



NEW

#PCHN  
Post-Assembly Insertion Nuts for Sensors



#CSAA  
Conveyor Air Nozzle Stands



NEW

#HFSD  
Conveyor Aluminum Extrusion



NEW

#CVBK  
Conveyor Belt Support Cover K



NEW

#GPRF  
Conveyor Belt Support Cover Reinforcements



NEW

#CHTD  
Conveyor Drive Pulley



NEW

#CHRS  
Conveyor Press Rollers, Standard



#NLBA  
UHMW Guide Rails



#NLA  
UHMW Guide Rail Shields



#NLTP  
UHMW Tape



#RMT  
Double-Sided Tape, Polyester



#SGL  
Guide Rails



NEW

#CGPS  
Conveyor Guide Rails - Straight



NEW

#CGPZ  
Conveyor Guide Rails - Z-Type



NEW

#CGPY  
Conveyor Guide Rails - Y-Type



NEW

#CGE  
Engineering Plastic Rails - Adjustable with Slotted Holes



NEW

#CGVN  
Guide Rail Brackets - Angle Bracket, Adjustable



NEW

#CGX  
Conveyor Engineering Plastic Guide Rail Brackets - Standard



#CGY  
Conveyor Engineering Plastic Guide Rail Brackets - Offset



#CGR  
Round Bar Conveyor Guide Rails



NEW

#CGV  
Round Bar Conveyor Guide Rail Brackets - Standard



NEW

#CGW  
Round Bar Conveyor Guide Rail Brackets - Offset



#CGL  
Conveyor Guide Rails - L-Shaped





#CGK  
Conveyor Guide Rail Brackets - Standard



#CGH  
Conveyor Guide Rail Brackets - Offset

ex! Example

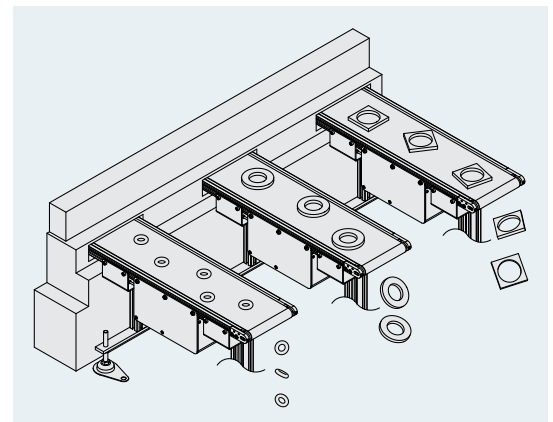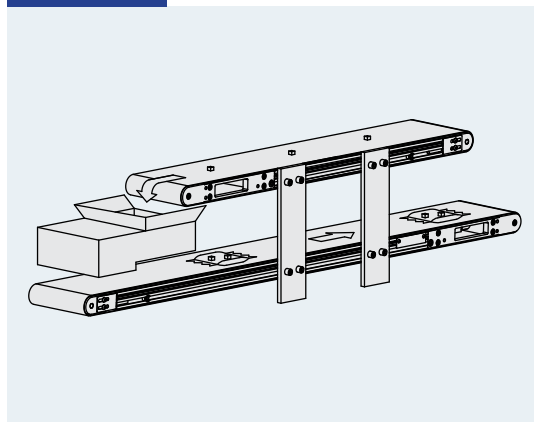



Flat Belts / Pulleys

Round Belts / Pulleys

Product Name	Friction Power Transmission		Synchronous Power Transmission	
	Flat Belts	Round Belts	Timing Belts	Chains
Usage, Picture				
Torque	Medium	Low	High	High
Speed	High	Medium	Low to High	Low-Medium
Efficiency	94-98%	92-97%	95-99%	91-98%
Advantages	<ul style="list-style-type: none"> <li>- Flexible (serpentine and twisted drives)</li> <li>- Transmit torque over long distance</li> <li>- Various materials (polyurethane, rubber, stainless steel) and colors</li> <li>- No lubrication</li> </ul>	<ul style="list-style-type: none"> <li>- Flexible (serpentine and twisted drives)</li> <li>- Soft belts (typically don't require additional tensioning)</li> <li>- No lubrication</li> </ul>	<ul style="list-style-type: none"> <li>- Quiet compare to chains</li> <li>- Require less tension than other belts</li> <li>- No stretch</li> <li>- No lubrication</li> <li>- No slippage</li> </ul>	<ul style="list-style-type: none"> <li>- Higher operating temp. than belts</li> <li>- Increased load capacity with multi-strand chains</li> <li>- Long operating life</li> <li>- No slippage</li> </ul>
Drawbacks	<ul style="list-style-type: none"> <li>- Creep and slip</li> <li>- High tension needed</li> <li>- Endless belts can't be repaired</li> <li>- Extreme temp. ranges, high moisture, oil, chemicals, etc can damage belts</li> </ul>	<ul style="list-style-type: none"> <li>- Creep and slip</li> <li>- Endless belts can't be repaired</li> <li>- Extreme temp. ranges, high moisture, oil, chemicals, etc can damage belts</li> </ul>	<ul style="list-style-type: none"> <li>- Tensioning</li> <li>- Vibrations</li> <li>- Endless belts can't be repaired</li> <li>- Extreme temp. ranges, high moisture, oil, chemicals, etc can damage belts</li> </ul>	<ul style="list-style-type: none"> <li>- Noise</li> <li>- Require lubrication</li> <li>- Can elongate due to wear</li> <li>- Limited flexibility</li> <li>- Usually limited to lower-speed applications</li> </ul>

### Flat Belts / Pulleys



**#HBPA**  
Flanged, Crowned, Press-fit Urethane



**#HBG**  
Idlers for Flat Belts - Flanged, Crowned



**#ROBA**  
Centering Groove, Crowned



**#ROFC**  
Idlers for Flat Belts - Straight, Centering Groove, Crowned



**#RBW**  
Economy, Straight, Crowned, Centering Groove



**#RFW**  
Idlers for Flat Belts - Economy



**#ROBW**  
Centering Groove, Crowned



**#ROF1**  
Idlers for Flat Belts - Straight, Crowned, Centering Groove



**#RWC**  
With Urethane, Centering Groove, Crowned



**#RWBC**  
With Urethane, Centering Groove, Crowned



**#HPCJ**  
Shaft Pulleys for Round Belts



**#ROFA**  
Idlers for Flat Belts - Straight



**#ROFW**  
Idlers for Flat Belts - Straight



**#HBLT**  
Flat Belts - General Purpose



**#FLTB**  
Flat Belts



**#MBF**  
Idlers for Round Belts - Narrow



**#MBG**  
Idlers for Round Belts - Wide



**#MBWA**  
Pulleys for Round Belts - Double Grooves



**#MBXA**  
Idlers for Round Belts - Double Grooves



**#RNDB**  
Round Belts

### Round Belts / Pulleys



**#MBR**  
Pulleys for Round Belts - Setscrew



**#MBRC**  
Pulleys for Round Belts - Clamping, U-Groove




Unit	Imperial Series (inch)				Metric Series (mm)						
Application	General				Light Load Conveyance	Heavy Load Conveyance	High Torque		Super High Torque		High Accuracy Positioning
Belt Type	MXL	XL	L	H	T5, T10	AT5, AT10	S2M-S14M	P2M-P8M	UP5M-UP8M	MTS8M	2GT-EV8YU
Pitch	0.800"	0.200"	0.375"	0.5"	5, 10 mm	5, 10 mm	2, 3, 5, 8, 14 mm	2, 3, 5, 8 mm	5, 8 mm	5 mm	2, 3, 5, 8 mm
Tooth Profile											
Backlash	Medium				Medium	Low	Low*		Low*		Very Low
Endless Belt	•				•		•		•		•
Open End Belt	—	•			•		• (selected pitches)		—		—
Belt Material (Tension Cord)	Rubber (Glass Fiber)		—		Polyurethane (Steel Cord)		Chloroprene Rubber (Glass Fiber)		Chloroprene Rubber (Glass Fiber)	Rubber (Glass Fiber)	Chloroprene Rubber (Glass Fiber)
	Polyurethane (Kevlar/Steel Cord)						Polyurethane (Aramid Fiber) (S2M, S3M, S5M only)				
Typical Applications	Conveying	•			•	•	—	—	—	—	—
	Positioning	—			—	•	•	•	•	•	•
	Power Transmission	—			—	—	•	•	•	•	•
	High Speed	•			•	—	•	•	•	•	•

\*MISUMI offers Special Zero Backlash S8M pulleys (For use with S-Type belts only)

## Timing Belts / Pulleys / Idlers / Accessories



#TIMP  
Timing Pulleys, Idlers



#TIMP  
Timing Pulleys, Idlers

#TIMB  
Timing Belts and Accessories

## Conveyor Timing Belts



#ATBT  
Timing Belts with Attachments – T5/T10

#LTBJ  
Long Timing Belts – Configurable No. of Teeth

## Keyless Bushing



#MLN  
Keyless Bushings – Easy Mounting (Nut)



#MLSL  
Keyless Bushings – Thin Wall

#MLM  
Keyless Bushings – Standard

#MLA  
Keyless Bushings – Straight

#MLAT  
Keyless Bushings – Straight for High Torque

#MLR  
Keyless Bushings – Compact



Product Name	Spur Gears	Helical Gears	Bevel Gears	Gear Racks	Worm Gears
Usage, Picture					
Efficiency	94–98%	94–98%	93–99%	98–99%	30–90%
Gear Axis	Parallel	Parallel and Intersecting Axis	Intersecting Axis	Non-Intersecting and Non-Parallel Axis	Non-Intersecting and Non-Parallel Axis
Advantages	<ul style="list-style-type: none"> <li>Highly reliable, simplest in design and easiest to manufacture</li> <li>Offer constant velocity ratio and are more efficient than helical gear of same size</li> <li>Spur gear teeth are parallel to its axis and do not produce axial thrust</li> <li>Used in efficient power transfer and low speed application (robotics application, machine tools etc.)</li> </ul>	<ul style="list-style-type: none"> <li>Run more smoothly and quietly than spur gears due to angled teeth designed</li> <li>Highly durable and are ideal for high-load applications</li> <li>Load is distributed over several teeth, resulting in less wear</li> <li>Used in high-speed, high-power mechanical systems like car gear boxes, machine tools, etc.</li> </ul>	<ul style="list-style-type: none"> <li>This gear makes it possible to change the operating angle</li> <li>Can be with straight or spiral teeth</li> <li>Miter gears are a special type of bevel gear designed to operate in pairs with identical numbers of teeth and diametral pitches, and a 1:1 ratio</li> <li>Transmission, Bevel Gear Differential, Printing, Material Handling</li> </ul>	<ul style="list-style-type: none"> <li>Cheap</li> <li>Compact</li> <li>Robust</li> <li>Easiest way to convert rotation motion into linear motion</li> <li>Often used in traveling gantries and columns, pick and place robots etc.</li> </ul>	<ul style="list-style-type: none"> <li>Worm gear drives operate silently and smoothly</li> <li>Self-locking and occupy less space</li> <li>Have high velocity ratio</li> <li>Used for reducing speed and increasing torque (gear reduction boxes)</li> </ul>
Disadvantages	<ul style="list-style-type: none"> <li>Gear teeth experience a large amount of stress</li> <li>Cannot transfer power between non-parallel shafts</li> <li>Compared to other gears, generate more noise at high speeds</li> </ul>	<ul style="list-style-type: none"> <li>More expensive than spur gears</li> <li>Mashed helical gears create axial thrust that need adequate support (like thrust bearings)</li> <li>Lower efficiency due to axial thrust generating more heat between sliding teeth</li> </ul>	<ul style="list-style-type: none"> <li>One wheel of bevel gear is designed to work with its complementary wheel and no other</li> <li>Must be precisely mounted</li> <li>The shafts' bearings must be capable of supporting significant forces</li> <li>Noisy at the higher speeds</li> </ul>	<ul style="list-style-type: none"> <li>Inherent friction causes constant wear and part replacement after certain time</li> </ul>	<ul style="list-style-type: none"> <li>Worm gear materials are expensive</li> <li>Worm drives have high power losses</li> <li>They produce a lot of heat</li> </ul>

**Gears**



**#GEAH**  
Spur Gears – with Pilot Bore



**#GEAB**  
Spur Gears – Pressure Angle 20 Deg., Module 0.5



**#GEA1**  
Spur Gears – Pressure Angle 20 Deg., Module 0.8



**#GEA2**  
Spur Gears – Pressure Angle 20 Deg., Module 1.0



**#GEA3**  
Spur Gears – Pressure Angle 20 Deg., Module 1.5



**#GEA4**  
Spur Gears – Pressure Angle 20 Deg., Module 2.0



**#GEA5**  
Spur Gears – Pressure Angle 20 Deg., Module 2.5



**#GEA0**  
Spur Gears – Pressure Angle 20 Deg., Module 3.0



**#GEFB**  
Spur Gears – Tooth Width, Hub Dimension Configurable, Pressure Angle 20 Deg.



**#GEAG**  
Induction Hardened Spur Gears – Pressure Angle 20 Deg.



**#GEYH**  
Bonded Plastic Spur Gears



**#GEAM**  
Plastic Spur Gears – Pressure Angle 20 Deg.



**#GEAL**  
Keyless Spur Gears – Pressure Angle 20 Deg.



**#KGHS**  
Bevel Gears – Pressure Angle 20 Deg.



**#NEGH**  
Helix Gears – Pressure Angle 20 Deg., Helix Angle 45 Deg.



**#GEAD**  
Spur Gears – Bearing Built-in



**#RGMA**  
Round Gear Rack – Pressure Angle 20 Deg., Standard L Dimension



**#WGEU**  
Worm Gear



**#WGEA**  
Worm Wheel






NEW

**#RGEH**  
Gear Racks – Ground, Pressure Angle 20 Deg.




NEW

**#RGEL**  
Gear Racks – Ground, Hole Position Configurable, Pressure Angle 20 Deg.



★

**#RGEA**  
Gear Racks – Pressure Angle 20 Deg., Standard L Dimension



★

**#LRGE**  
Gear Racks – Pressure Angle 20 Deg., Configurable L Dimension

Magnetic Transmission



**#MDQ**  
TM Non-Contact Magnetic Transmission Drives



**#MEQ**  
[Economy] TM Non-Contact Magnetic Transmission Drives

Chains / Sprockets



**#CHE1**  
Roller Chains



**#SSP1**  
Sprockets – 11B/15B Series



**#JMOC**  
Joint Links, Offset Links



**#SP15**  
Sprockets – 15B Series



**#SP25**  
Sprockets – 25B Series



★

**#SP35**  
Sprockets – 35B Series



★

**#SP40**  
Sprockets – 40B Series



**#SP50**  
Sprockets – 50B Series



**#SP60**  
Sprockets – 60B Series



**#SP4S**  
Sprockets – Double Strand



**#SP80**  
Sprockets – 80B Series



**#SP5S**  
Sprockets – Double Strand



**#LFSP**  
Keyless Sprockets – 35B/40B Series



✔

**#DRC**  
Idle Sprockets – Single Bearing



★

**#DRCB**  
Idle Sprockets with Hub



**#DRCBW**  
Idle Sprockets with Hub Double Pitch



**#SDRC**  
Small Idlers



**#IDP**  
Idle Pins



★

**#GDCC**  
Chain Guides – Raised Track, Steel Framed



**#GDC**  
Chain Guides – Raised Track



**#GDR**  
Chain Guides – Chanel, Flanged Steel Framed, Side Mount



**#SGDT**  
Steel Chain Guides



✔

**#STR**  
Turnbuckles – Standard, Long



**#SRCL**  
Turnbuckle Components – Tapped Hex



Chains / Sprockets

Conveyor Chains / Sprockets

Plastic Chains

Tensioners



**#STBT**  
Turnbuckles – Threaded



**#HSBL**  
Turnbuckle Components – Threaded Rod



**#SJNI**  
Turnbuckle Components – Tapped Hex



Conveyor  
Chains /  
Sprockets



**#CHEW**  
Chains – Double Pitch



**#SP20**  
Sprockets – Double Pitch



**#JNTW**  
Joint Links for Double Pitch Chains



**#CHEL**  
Roller Chains with Attachments



**#JNTL**  
Joint Links for Chains with Attachment



**#CHET**  
Roller Chains with Attachments



**#WCHE**  
Free Flow Conveyor Chains



**#WESP**  
Sprockets – Double Speed, Free Flow Conveyor Chains



**#WCF**  
Aluminum Frame for Double Speed – Free Flow Conveyor Chains



**#RNG**  
Return Guides for Double Speed – Free Flow Conveyor Chains

Plastic Chains



**#CHEC**  
Engineering Plastic Block Chains – Single Strand



**#CHES**  
Sprockets – Engineered Plastic Chains, 2-Row



**#CHEE**  
Engineering Plastic Block Chains – Double Strand



**#TPCH**  
Table Top Conveyor Chains



**#TPSP**  
Sprockets – Table Top Conveyor Chains



**#TPDR**  
Idler Sprockets – Table Top Conveyor Chains

Tensioners



**#TSUB**  
Tensioning Unit with an Idler



**#TNSN**  
Tensioning Units without Idler



**#TNSL**  
Tensioners without Idlers



**#SDPT**  
Slide Plate for #TNSN Unit



**#THBS**  
Chain Tensioners – Idler Set



**#TSBX**  
Chain Guide Tensioners



← LOW CONFIGURABILITY LEVEL / COST HIGH →

Product Name	Dowel Pins	Height Adjusting/ Support Pins	Locating Pins	Automotive Style Locating Pins
Usage/Picture	Pivot & Locate	Support & Locate	Jigs & Fixture	
Size (Shank Dia.)	Ø1 to 16 mm	Ø3 to 15 mm	Ø0.5 to 40mm	Ø3 to 35 mm
Max. Level of Configurability	•	•••	•••••	•••••
Pin Configurable Dimensions	P Selectable Configurability Level •	P Configurable Configurability Level •••	P, L, B Configurable Configurability Level ••••	Fully Configurable Configurability Level •••••
Picture				
D (Shank Dia.)	Standard	Standard	Standard	Standard
P (Head Dia.)	Standard	0.01 mm increment	0.01 mm increment	0.01 mm increment
B (Head Lg.)	Standard	Standard	0.1 mm increment	0.1 mm increment
L (Shank Lg.)	Standard	Standard	1 mm increment	1 mm increment
E (Lead Lg.)	Standard	Standard	Standard	0.1 mm increment
A (Lead Angle)	Standard	Standard	Standard	15° increment
Cost \$	\$	\$\$	\$\$\$	\$\$\$\$

Locating Pins / Bushings

**Locating Pins / Bushings**

**#AFPB**  
Large Head, Tapered, High Hardness Stainless Steel, Press Fit, Tapped, Threaded

**#AKFA**  
High Hardness Stainless Steel, Tapered, Configurable Taper Angle

**#AFPQ**  
High Hardness Stainless Steel, Sphere Head

**#AKFQ**  
High Hardness Stainless Steel, Sphere Large Head, D and P Selectable Tolerance

**#AFPD**  
High Hardness Stainless Steel, Large Flat Head, Press Fit, Tapped, Threaded

**#AFPS**  
High Hardness Stainless Steel, Small Head, Tapered

**#ALPS**  
High Hardness Stainless Steel, Straight, Tapered, Sphere

**#FPBA**  
Large Head, P Standard

**#FPBT**  
Large Head, Round, Tapped, P Standard

**#FPNA**  
Large Head, Threaded, P Configurable

**#KFAA**  
Large Head, Threaded, P / L / B & Pilot Configurable

**#FPNS**  
Large Head, Threaded, P / L / B Configurable, Hex Socket

**#FPTM**  
Large Head, Standard, P Configurable, C' Bore Hole

**#FPQA**  
Spherical Large Head, Standard, P Configurable

**#FPQT**  
Spherical Large Head, Tapped, P Configurable

**#FPQN**  
Spherical Large Head, Threaded, P Configurable

**#KFQA**  
Spherical Large Head, Threaded, P / L / B Configurable

**#FPDC**  
Large Flat Head, Standard, P Standard

**#FPDT**  
Large Flat Head, Tapped, P Standard



**#FPFN**  
Large Flat Head, Threaded,  
P Configurable



**#KFFA**  
Large Flat Head, Threaded,  
P/L/B Configurable



**#FPYN**  
Side Locating – Standard



**#JPRB**  
Large Head, Round Tapered,  
Standard



**#KFPBA**  
Large Head, Round Tapered,  
D/P Tolerance Selectable



**#LPDE**  
Selectable Pilot Shape – Standard,  
p6 Shank



**#LPCA**  
Selectable Pilot Shape –  
Straight Tapped



**#LPAA**  
Selectable Pilot Shape – Threaded



**#LPAL**  
Selectable Pilot Shape – Threaded,  
Pilot Length Configurable



**#JPNG**  
Full Thread



**#JPLR**  
Marker Pins Hexagon Socket



**#JPLB**  
Marker Pins



**#FPCH**  
Bullet Nose, Miniature, Press Fit



**#JPPH**  
Large Head, Tapered, Plastic Tip



**#JPZA**  
Resin Locating Pins – Large Head,  
Sphere, P Configurable, Standard



**#HPSF**  
Locating Pilot Pins – Standard



**#WPG**  
Double Pilot, Standard,  
Configurable



**#CFPL**  
Locating Pins for Height Adjusting



**#AFPM**  
Large Head Round,  
Nonmagnetic, Standard



**#FPSA**  
Small Head, Round, Standard,  
P Standard



**#FPST**  
Small Head, Tapped, P Configurable



**#KFSA**  
Small Head, Standard,  
P/L/B & Pilot Configurable



**#JPCT**  
Setscrew Mounting Shank –  
Circumference Groove



**#FPQS**  
Spherical Small Head – Standard,  
P Configurable



**#FPQ2**  
Spherical Small Head – Tapped,  
P Configurable



**#KFQS**  
Spherical Small Head – Standard,  
P/L/B Configurable



**#JPCQ**  
Spherical Large Head – Setscrew  
Mounting Shank



**#FPDS**  
Small Flat Head, Standard,  
P Configurable



**#FPD2**  
Small Flat Head, Tapped,  
P Configurable



**#KFFS**  
Small Flat Head, Standard,  
P/L/B Configurable



**#JPRS**  
Small Head, Round Tapered,  
Standard



**#KFPS**  
Small Head, Round Tapered,  
Standard, DP Tolerance,  
R Selectable



**#JPZS**  
Resin Locating Pins – Small Head,  
Tapered, P Configurable



**#PPFJ**  
Pusher Pins – Straight, Flat



**#PPFS**  
Pusher Pins – Small Head, Flat



**#LPST**  
Locating Pin – Straight,  
D Tolerance, Tapped



**#LPSQ**  
Straight, Sphere, Standard, Tapped



**#FPJA**  
Shoulder, Standard, P Standard



**#FPUA**  
Shoulder, Tapped, P Standard



**#FPTN**  
Shoulder, Threaded, P Configurable



**#KFHA**  
Shoulder, P/L/B Configurable,  
Threaded, Pilot Configurable



**#FPJAT**  
Configurable Shoulder Thickness,  
Standard



**#FPJATD**  
Configurable Shoulder Thickness &  
Diameter, Standard



**#JPCJ**  
Shoulder, Set Screw Mounting  
Shank, Notch Shape



**#LPMB**  
Selectable Pilot Shape, Configurable  
Shoulder Thickness, Threaded



**#LPZ**  
Bolt Fixing, Standard



**#JPMA**  
Bolt Fixing with Pilot



**#LBNA**  
Large Bolt Fixing



**#JPEA**  
Eccentric, Standard



**#MASA**  
Flanged Locating Pins, Flat



**#FLPA**  
Flanged Locating Pins, Tapered,  
Standard



**#KKB**  
Height Adjusting Blocks –  
Standard



**#IPMA**  
Locating Pins for Grippers –  
Stepped



**#CMPA**  
Plate Centering Pins



**#LPN**  
With Air Vent, Threaded



**#SNPB**  
Resin Locating Pins – Small  
Diameter, Sphere, Standard  
Tolerance



**#FPAJ**  
Resin Locating Pins – Bolt Fixing,  
Precision Class



**#SFKK**  
Small Diameter Locating Pins –  
High Hardness Stainless Steel  
Straight



**#SFSK**  
Small Diameter Locating Pins –  
High Hardness Stainless Steel  
Small Head



**#SFSZ**  
Small Diameter with Head, Flat,  
Standard Tolerance



**#SFHH**  
Small Diameter Height  
Adjusting Pins



**#DSDP**  
Spring Loaded Small Diameter  
Pin Units



**#SFKS**  
Small Diameter, Flat, Standard  
Tolerance



**#SFNN**  
Small Diameter Locating Pins –  
Small Head



**#SFPS**  
Small Diameter with Shoulder



**#SFPN**  
Small Diameter with Shoulder,  
Threaded Shank



**#FESM**  
Feed Pins – Standard



**#FESG**  
Feed Pins – Tapped



**#FEPS**  
Feed Pins – Threaded



**#FEPM**  
Feed Pins with Shoulder – Standard



**#FEPG**  
Feed Pins with Shoulder – Tapped



**#FEPN**  
Feed Pins with Shoulder – Threaded



**#SDPA**  
Support Pins – Round, Pilot



**#SHFJ**  
Support Pins – Pilot, Round, Straight, Standard



**#LSPA**  
Support Pins – Tip Shape Selectable



**#SRPA**  
Support Pins – Pilot Shape Selectable, Stepped Pilot



**#JPR**  
Height Adjust Pins – Hex/B/F Standard



**#SRTA**  
Hex, Medium Accuracy, Threaded



**#JPRM**  
Height Adjust Pins – Tapped, Hex



**#SRTB**  
Hex, Medium Accuracy, Tapped



**#JPHF**  
Height Adjust Pins with Shoulder – F Standard



**#JPHA**  
Height Adjust Pins with Shoulder – F Standard



**#JPH2**  
Height Adjust Pins – Tapped, Round



**#JPAM**  
Height Adjust Pins – Press Fit, L Configurable



**#JPHU**  
Height Adjust Pins – Counterbored



**#SPFA**  
Support Pins – Flat, Round, Flat, Threaded



**#JPSR**  
Height Adjusting Pins Small Head Threaded



**#JPTU**  
Height Adjust Pins



**#JPTC**  
Height Adjusting Caps



**#LPHB**  
Compact Flange – Bolt Fixing



**#JBA**  
Bushings for Locating Pins – Straight, Standard



**#JBAU**  
Bushings for Locating Pins – Straight, Thin Wall



**#JBAF**  
Bushings for Locating Pins – Straight, Standard, Configurable



**#JBAUF**  
Bushings for Locating Pins – Straight, Thin Wall, Configurable



**#JBH**  
Bushings for Locating Pins – Flanged, Standard



**#JBHU**  
Bushings for Locating Pins – Flanged, Thin Wall



**#JBHF**  
Bushings for Locating Pins – Flanged, Standard, Configurable



**#JBHUF**  
Bushings for Locating Pins – Flanged, Thin Wall, Configurable



**#JBAG**  
Bushings for Locating Pins – Straight, Retaining



**#JBHG**  
Bushings for Locating Pins – Flanged



**#JBHY**  
Bushings for Locating Pins – Notched



**#JBEH**  
Bushings for Locating Pins Oval – Compact Flange



**#JBE**  
Bushings for Locating Pins – Oval, Shoulder



**#JBAD**  
Bushings for Locating Pins – Copper Alloy, Straight



**#JBHD**  
Bushings for Locating Pins – Copper Alloy, Shoulder



#JBC Bushings for Locating Pins – Ceramic



#LCB Bushings for Locating Pins with Oil Grooves – Hardened



#JBT Bushings for Locating Pins – Round Flanged, P/L Standard



#JBS Bushings for Locating Pins – Square Flanged, P/L Standard



#JBOK Bushings for Locating Pins Compact Flange – Economy



#JBN Bushings for Locating Pins – Compact Flanged, P/L Standard



#ELAN Standard Grade, Shoulder, Threaded



#ELAT Standard (h7), Shoulder, Circumference Groove



#SELA Standard (h7), Shoulder, Threaded, Tip Shape Selectable, Plated



#SELT Standard (h7), Shoulder, Circumference Groove, Tip Shape Selectable, Plated



#ELNN Locating Pins for Jigs – Standard (h7), Threaded



#ELNT Locating Pins for Jigs – Standard (h7), Circumference Groove



#SELN Standard (h7), Threaded, Tip Shape Selectable, Plated



#SEL4 Standard (h7), Circumference Groove, Tip Shape Selectable, Plated



#LANAN Precision (g6), Shoulder, Threaded



#LATA Precision (g6), Shoulder, Set Screw



#SLAN Precision (g6), Shoulder, Threaded, Tip Shape Selectable, Plated



#SLAT Precision (g6), Shoulder, Set Screw, Tip Shape Selectable, Plated



#LNMAN Locating Pins for Jigs – Precision (g6), Threaded



#LNTA Locating Pins for Jigs – Precision (g6), Set Screw Fixing



#SLNN Precision (g6), Threaded, Tip Shape Selectable, Plated



#SLNT Precision (g6), Set Screw Fixing, Tip Shape Selectable, Plated



#FLAN Locating Pins for Jigs – Configurable, Shoulder, Threaded



#FLAT Configurable, Shoulder, Circumference Groove



#FLNN Locating Pins for Jigs – Configurable, Threaded



#FLNT Locating Pins for Jigs – Configurable, Circumference Groove



#ELAS Standard Grade, Short Set Screw, Shouldered



#ELNS Standard Class (h7) Set Screw, Circumference Groove



#ELAC Locating Pins for Jigs – Standard (h7) Set Screw, Notch Shape



#ELNC Locating Pins for Jigs – Standard (h7) Set Screw, Notch Shape



#LANAR Locating Pins for Jigs – Long Head, Shoulder, Threaded, Plated



#LNNAR Locating Pins for Jigs – Long Head, Threaded



#ELAB Standard Class (h6), Shoulder, Bolt Fixing



#ELNB Standard Class (h6), No Shoulder, Bolt Fixing



#RANA Locating Pin for Jig Round Edge Shoulder Nut





Locating Pins / Bushings

Stop Pins / Stopper Blocks



**#RNNA**  
Locating Pin for Jig Round Edge No Shoulder Nut



**#HATA**  
Locating Pin for Jigs - Bullet Nose, Shoulder



**#HNNTA**  
Bullet Nose, Selectable Shank, No Shoulder



**#LANQ**  
Locating Pins for Jigs - Square Head, Shoulder, Threaded



**#LNNQ**  
Locating Pins for Jigs - Square Head, No Shoulder, Threaded



**#NLAN**  
Locating Pins for Jigs - Oval, Shoulder, Threaded



**#NLNN**  
Locating Pins for Jigs - Oval, Threaded



**#ZLA**  
Insulating Locating Pins for Jigs & Fixtures - Threaded



**#HUPN**  
Height Adjusting Pins for Fixtures - Lock Nut



**#HUPT**  
Height Adjusting Pins for Fixtures - Set Screw



**#NUTK**  
Detection Pins for Weld Nuts



**#PICP**  
Tapered Spring Loaded Locating Pins

NEW

Stop Pins / Stopper Blocks



**#STMH**  
Stop Pins - Press-Fit



**#USTM**  
Stop Pins - Press-Fit Urethane



**#USTH**  
Stop Pins - Screw with Urethane



**#SSTE**  
Stop Pins - Screw, T Standard



**#BSTE**  
Stop Pins - Spherical, H Standard



**#SSTH**  
Stop Pins - Screw with Wrench Hole



**#UPPL**  
Stoppers with Plates - Urethane, Low Elastic Rubber



**#UPWH**  
Stoppers with Washers - Urethane, Low Elastic Rubber



**#SBHB**  
Stopper Blocks - Straight, Through Hole



**#SBNB**  
Stopper Blocks Tapped Hole Tapped Hole



**#SBFB**  
Stopper Blocks - Plate



**#SBUB**  
Stopper Blocks with Urethane - Block



**#SBEB**  
Stopper Blocks with Urethane - Cylinder



**#AST**  
Round Stoppers - Standard



**#ASTM**  
Round Stoppers Tapped Hole



**#ASTC**  
Shims for Round Stoppers



**#FSWJ**  
Flat Stoppers - Standard



**#FSWS**  
Flat Stoppers with One Hole



**#FSWN**  
Shims for Flat Stoppers





#PDAP  
Point Pads – Tapped

Adjusting  
Screws /  
Threaded  
Stopper Blocks



#ANB  
Adjusting Stopper Screws –  
Hexagon Socket, L Configurable,  
Fine Thread



#ANS  
Adjusting Stopper Screws –  
Wrench Flat, L Selectable,  
Fine Thread



#HANB  
Adjusting Stopper Screws –  
L Selectable, Fine Thread



#ANH  
Adjusting Stopper Screws –  
Hexagon Bolt, Fine Thread



#ANKB  
Adjusting Stopper Screws with  
Knurled Knob – Fine Thread



#STBB  
Locating Bolts – Round Head,  
Fine Thread



#STBA  
Locating Bolts, Round Tip R, Fine  
Thread



#STRB  
Stopper Bolts – Hexagon Socket,  
Fine Thread



#STSC  
Stopper Screws



#TSB  
Threaded Stopper Blocks –  
Counterbore, Fine Thread



#TABB  
Threaded Stopper Blocks –  
Counterbore Tapped Hole, Fine Thread



#PAFN  
Brackets for Stopper Screws –  
Hex, Fine Thread



#PABN  
Brackets for Adjustment Screws Bolt  
Fine Thread



#SNTB  
Threaded Stopper Block – Standard



#STBN  
Threaded Stopper Blocks –  
Counterbore, Fine Thread



#AJSN  
Threaded Stopper Blocks,  
Counterbore & Tapped Hole –  
H Configurable



#AJLT  
Threaded Stopper Blocks –  
L-Shaped, Lengthways Adjustable



#AJTN  
Threaded Stopper Blocks –  
T-Shaped, Fine Thread



#AJLC  
Threaded Stopper Blocks –  
L-Shaped, Widthways Adjustable



#AJFN  
Threaded Stopper Blocks – Side  
Counterbored, Fine Thread



#AJLN  
Threaded Stopper Blocks –  
L-Shaped, Bottom Mounting



#AJWB  
Threaded Stopper Blocks –  
Two Hole



#UST  
Stopper Bolts with Bumpers –  
Standard, Straight Shape



#USS  
Stopper Bolts with Bumpers –  
Straight



#PSCB  
Stopper Bolts with Bumpers –  
Hexagon Socket Head Cap Screw



#UNAM  
Stopper Screws Head Hexagon  
Socket – MC Nylon



#UNAH  
Stopper Bolts With Bumpers –  
Hexagon Socket Head



#UNBH  
Stopper Bolts With Bumpers –  
Hexagon Socket Tip



#UNST  
Bolts with Low Elastic Rubber



#UNSH  
Head Hexagon Socket Cap Screws  
with Low Elastic Rubber



#AJST  
Adjusting Bolts – Hex, Coarse, Fine



#AJSR  
Adjusting Bolts – Hex Head with  
Hex Socket



#AJKT  
Adjusting Bolts – Knurled Head with  
Hex Socket



**#AJSK**  
Adjusting Bolts – Knurled Knobs



**#AJKB**  
Blocks for Adjusting Bolts – Standard



**#AJSB**  
Blocks for Adjusting Bolts – Side Mounting



**#AJLB**  
Blocks for Adjusting Bolts – L-Shaped, H Selectable



**#AJSL**  
Blocks for Adjusting Bolts – Side Mounting, L-Shaped, H Selectable



**#AJP**  
Adjusting Pins – Retaining Ring



**#SJKB**  
Screw Jacks



**#LVW**  
Leveling Screws – Standard



**#LVGB**  
Leveling Screws Large Holes for Adjustment Wrench Flat



**#LVB**  
Leveling Screws – Screw Tip



**#LVN**  
Lock Nuts



**#RSM**  
Clamping Screws – Ball



**#FSM**  
Clamping Screws – Angle



**#FSMB**  
Clamping Screws – Non-Reverse



**#FSMG**  
Clamping Screws – Non-Reverse, Serrated



**#BALA**  
High Locked Screws – SR Shape



**#BALT**  
High Locked Screws – Flat Shape



**#HRSM**  
Clamping Screws – Ball



**#HFS2**  
Clamping Screws – Angle



**#HFS2**  
Clamping Screws – Non-Reverse



**#HFMG**  
Clamping Screws – Non-Reverse, Serrated



**#BRAS**  
Clamping Screws – Tip Clamp, Ball



**#BFAS**  
Clamping Screws – Tip Clamp, Angle



**#BRSM**  
Clamping Screws – Head Clamp, Ball



**#BFSM**  
Clamping Screws – Head Clamp, Angle



**#SGBS**  
Grub Screw Sets with Ball Point



**#SGTP**  
Grub Screw Sets with Thrust Point



**#SGKS**  
Grub Screw Sets – Stainless Steel



**#SGKG**  
Grub Screw Sets – Rubber Pads



**#SGKA**  
Grub Screw Sets – Flanged



**#PCW**  
Clamp Plates – Standard



**#CPWC**  
Shims for Clamp Plates – Standard



**#CMAJ**  
Blocks for Shim Adjustment of Welding Jigs – Straight




**#CMAC**  
Blocks for Shim Adjustment of Welding Jigs – Shim Sets



**#CMAL**  
Blocks for Shim Adjustment of Welding Jigs – L-Shaped



**Locating / Guide Components**



**#CMA2**  
Blocks for Shim Adjustment of Welding Jigs – Shim Sets



**#RGP**  
Basic Guide Pins – Tip Shape Selectable



**#RGPE**  
Rough Guide Pins – Eccentric



**#RGPN**  
Basic Guide Pins – Tip Shape Selectable



**#RGH**  
Rough Guide – Standard



**#RGN**  
Rough Guide – Narrow



**#WGHA**  
Guides – Straight



**#WGLA**  
Guides – L-Shaped




**#WGDL**  
Guides – Height Adjusting



**#WGDB**  
Guides – Pedestal



**#WGNA**  
Guides – Angle



**#WGVA**  
Guides – V-Shaped



**#WGTB**  
Guides – Plates



**#VBT**  
V Blocks – Standard, T-Shaped



**#VZB**  
V Blocks – Precision Class



**#CVTA**  
Locating Block Sets – V-Shaped, Flat Bottom, Standard



**#CVTB**  
Locating Block Sets – V-Shaped, Plate Holding, Standard



**#CAT**  
Locating Block Set – CAT



**#TPCA**  
Tapered Pin Locating Block Sets – Tapped



**#TPCZ**  
Tapered Pin Locating Block Sets – Counterbored



**#TPCS**  
Tapered Pin Locating Block Sets – Short



**#GMLH**  
Rough Guides – Round Pole



**#GIRH**  
Rough Guides – Plate



**#RGHK**  
Rough Guides – Angle



**#CPGP**  
Guide Plates



**#RLLP**  
Roller Pushers – Low Particle Generation



**#LPCE**  
Lift Pins – B Standard

**Locating Units**



**#PCPN**  
Work Detection Units



**#ATBJ**  
Feed Fingers



**#ATBE**  
Feed Fingers – Economy



**#ATLA**  
Auto – Latch

**Workpiece Clamps**



**#BFPP**  
Absorbing Pusher Pins

Adjusting Screws / Threaded Stopper Blocks

Locating / Guide Components

Locating Units

Workpiece Clamps



**#SPCS**  
Spring Clamps – Small



**#SPCP**  
Spring Clamp – Large



**#GPH**  
Guide Plungers with Hexagon Socket



**#GP**  
Nose Attachments for Guide Plungers – V-Shaped



**#SLDP**  
Slide Pushers

**NEW**

**Plungers / Index Plungers**



**#BPM**  
Ball Plungers



**#BPW**  
Ball Plungers – Standard



**#BMS**  
Ball Plungers – Stainless Steel



**#BPRJ**  
Ball Plungers – Roller



**#BPCF**  
Ball Plungers – Load Adjustable



**#BNMN**  
Ball Plungers – Resin



**#BMPJ**  
Ball Plungers – Fine Thread



**#BPK**  
Ball Plungers – Fine Thread



**#BPJL**  
Ball Plungers – Long



**#BMSL**  
Ball Plungers – Stainless Steel, Long



**#BPJS**  
Ball Plungers – Selectable Length



**#BSML**  
Ball Plungers – Stainless Steel, Selectable Length



**#BPJG**  
Wrenches for Ball Plungers



**#BPHH**  
Ball Plungers – Hexagon Socket Head Cap Screw



**#FBPJ**  
Flanged Ball Plungers



**#BBT**  
Ball Buttons



**#PFPP**  
Press Fit Plungers



**#PFPR**  
Press Fit Plungers – Roller



**#TBBT**  
Ball Buttons – Tapped



**#CBPJ**  
Roller Plungers – Compact, Load Adjusting Function



**#SBPJ**  
Roller Plungers – Mounting, Vertical Mount



**#RBPJ**  
Roller Plungers – Bolt



**#PJH**  
Spring Plungers – Standard



**#PJHK**  
Spring Plungers – Stainless Steel



**#PJJ**  
Wrenches for Spring Plungers – Standard



**#NPSB**  
Block Plungers

**NEW**



**#SPJF**  
Short Spring Plungers – Short, Standard



**#SPJK**  
Short Spring Plungers – Short, Stainless Steel



**#MPFH**  
Micro Spring Plungers – Sphere, Standard



**#MPFS**  
Micro Spring Plungers Short



**#MPFT**  
Micro Spring Plungers – Flat, Set Screw



**#JJPP**  
Spring Loaded Fixture Pin



**#SPPL**  
Spring Pins

NEW



**#PJHT**  
Spring Plungers with Tapped Nose



**#GLPN**  
Long Sleeve Plungers



**#PJLH**  
Spring Plungers with Hexagon Socket Hole



**#PJHR**  
Spring Plungers with Hexagon Nose



**#PJLF**  
Spring Plungers – Flat Nose



**#PJHZ**  
Spring Plungers for Slope Surfaces



**#FPJH**  
Spring Plungers with Flange



**#PXAF**  
Indexing Plungers – Tip Shape Selectable



**#PMXS**  
Indexing Plungers – Fine Thread



**#FPXA**  
Indexing Plungers – Flanged



**#PXTA**  
Indexing Plungers – Tip Tapped



**#PXRN**  
Indexing Plungers – Aluminum Knob, Rest Position



**#PXRA**  
Indexing Plungers – Resin Knob



**#PMXS**  
Compacted Indexing Plungers – Return



**#PXAL**  
Indexing Plungers – Long-Return



**#PXSH**  
Indexing Plungers – Precision Pilot, Return, Fine Thread



**#SXPP**  
Indexing Plungers – Press Fit



**#NSXP**  
Knob for Press Fit Indexing Plunger



**#PXNA**  
Indexing Plungers – Knobless, Compact



**#PXNK**  
Indexing Plungers – Knobless



**#PMXR**  
Indexing Plungers – Coarse Thread Lever



**#PXVB**  
Indexing Plungers – Fine Thread Lever Nuts



**#PXSR**  
Indexing Plungers – Switch Lever, Fine Thread



**#PMXP**  
Indexing Plungers – Push



**#PXSP**  
Indexing Plungers – Plate Mount



**#PXA**  
Indexing Plungers – Fine Thread, Return



**#BLPF**  
Ball Lock Pins Spring



**#BLP**  
Ball Lock Pins



Toggle Clamps /  
Workpiece  
Clamps



#TCH  
Horizontal Handle



#TCV  
Vertical Handle



#TCP  
Push-Pull Clamps



#TCW  
Welded-Heavy Duty Clamps



#TCA  
Clamps Accessories



#BFPP  
Absorbing Pusher Pins



#SPCS  
Spring Clamps - Small



#SPCP  
Spring Clamp - Large



#GPH  
Guide Plungers with Hexagon Socket



#GP  
Nose Attachments for Guide  
Plungers - V-Shaped



#SLDP  
Slide Pushers



Automotive  
Inspection  
Components



#KJPS  
Slot Pins for Inspection  
Components - Straight



#KJ01  
Slot Pins for Inspection  
Components - Straight



#KJPD  
Slot Pins for Inspection  
Components - Stepped, Straight



#KJPZ  
Slot Pins for Inspection  
Components - Stepped, Straight



#KJP2  
Slot Pins for Inspection Jigs -  
Stepped Diamond, Straight



#KJPV  
Slot Pins for Inspection Jigs -  
Stepped Diamond, Straight



#KJP1  
Slot Pins for Inspection Jigs -  
Oval Straight



#KJP3  
Slot Pins for Inspection Jigs -  
Square Straight



#KJPN  
Slot Pins for Inspection Jigs -  
Stepped and Threaded



#KJP8  
Slot Pins for Inspection Jigs -  
Straight Long



#KJPM  
Slot Pins for Inspection Jigs -  
Stepped and Threaded



#KJPL  
Slot Pins for Inspection Jigs -  
Stepped Long



#KJPG  
Straight Threaded with Step -  
2 Steps



#KJP7  
Slot Pins for Inspection Jigs -  
1 Stepped, Threaded End



#KJP4  
Slot Pins for Inspection Jigs -  
Tapered



#KJ02  
Slot Pins for Inspection Jigs -  
Tapped Ends



#KJP5  
Slot Pins for Inspection Jigs -  
Stepped Diamond and Tapered



#KJP6  
Slot Pins for Inspection Jigs -  
Stepped Diamond, Taper,  
Configurable



#KJP9  
Slot Pins for Inspection  
Components - Threaded, Tapered



#KJPH  
Marking Pins



#KJPC  
Slot Pins for Inspection  
Components - Clamp, Straight



#KJPK  
Slot Pins for Inspection Jigs -  
Taper and Threaded Revolving  
Diamond-Shaped



**#KJPT**  
Slot Pins for Inspection Jigs – Clamp Design, Straight and Taper and



**#KJPR**  
Pins for Inspection Jigs – GO and NO-GO, Reversible



**#KJPB**  
Slot Pins for Inspection Jig – Check Pin with Groove



**#KJBA**  
Bushings for Inspection Jigs – Straight



**#KJBP**  
Bushings for Inspection Jigs – Straight



**#KJBS**  
Bushings for Inspection Jigs – Shouldered



**#KJBF**  
Pins for Inspection Jigs – Shouldered



**#KJBD**  
Bushings for Inspection Jigs – Stepped Bore and Optional Shoulder



**#KJBM**  
Bushings for Inspection Components – Stepped and Threaded for Straight Pins



**#KJB1**  
Bushings for Inspection Components – Stepped and Threaded for Straight Pins, Shouldered



**#KJBW**  
Bushings for Inspection Components – Stepped and Threaded for Taper Pins



**#KJBT**  
Pins for Inspection Components – Stepped and Threaded for Taper Pins



**#KJBK**  
Bushings for Inspection Components – D-Shape



**#KJB5**  
Bushings for Inspection Components – D-Shape, Shouldered



**#KJBC**  
Bushings for Inspection Components – Oval



**#KJB4**  
Bushings for Inspection Components – Oval, Shouldered



**#KJBR**  
Bushings for Inspection Components – Square



**#KJB6**  
Bushings for Inspection Components – Square, Shouldered



**#KJBN**  
Bushings for Inspection Jigs – Threaded Bore



**#KJB2**  
Locating Blocks for Inspection Components



**#KJRB**  
Round/Oval/Square Opening Shape for Resin Panels



**#KJTC**  
Inspection Jigs – Shim Plates, Square and Round Shape



**#KJT1**  
Inspection Jigs – Shim Plates, Square and Round Shape



**#KJTP**  
Inspection Jigs – Shim Plates, Square and Round Shape




**#KJTM**  
Inspection Jigs – Shim Plates, Square and Round Shape



**#JHR**  
Inspection Jigs – Hinge Units, Horizontal Travel



**#JSR**  
Inspection Jigs – Hinge Units, Horizontal Travel



**#JHSP**  
Inspection Jigs – Hinge Units, Horizontal Travel




**#JHTS**  
Inspection Jigs – Hinge Units, Vertical Travel



**#JIFL**  
Inspection Jigs – Angle Plate Units



**#JIST**  
Support Stand for Angle Plate Unit



**#JIP**  
Base Plate for Angle Plate Unit



**#KJCS**  
Clamp Plates for Inspection Components



**#KJCP**  
Inspection Jigs – Clamp Angle Plate



**#KJL**  
Components for Inspection Jigs – L Pins




**#KJTS**  
Inspection Jigs – L and T Shape Pin



**#KJLP**  
Inspection Jigs – Locating Kits



**#CRB**  
Inspection Jigs – Locating Ball




**#CRBP**  
Inspection Jigs – Locating Pad



**#CRBC**  
Inspection Jigs – Locating Pad Bracket



**#CLIP**  
Inspection Jigs – Pin Clips



**#KJW**  
Inspection Jigs – Wires for Pins



**#KJWC**  
Inspection Jigs – Chains For Slot Pins

Contact Probes



**#NPT4**  
[Economy] Contact Probes – NPT038 / NRT038W Series



**#RNP2**  
Double Tipped Probes



**#NP26**  
Contact Probes – NP26 Series



**#NP31**  
Contact Probes – NP31 Series



**#NP38**  
Receptacles – NP38 Series



**#NP20**  
Contact Probes – NP20 Series



**#NP58**  
Contact Probes – NP58 Series



**#NRB2**  
Receptacles with Wire – NRB26 / NRB31 / NRSB31 Series



**#NP30**  
Contact Probes – NP30 Series



**#NP72**  
Contact Probes – NP72 / NP72HD Series



**#NR68**  
Contact Probes – NP68S3SF Series



**#NP76**  
Contact Probes – NP76 Series



**#NRB1**  
Receptacles with Lead Wire



**#NP68**  
Contact Probes – NP68SF Series



**#NP88**  
Contact Probes – NP88 / NP88HD Series



**#NR45**  
Contact Probes – NP45S3SF / NP45S3 Series



**#NP45**  
Contact Probes – NP45SF / NP45 Series



**#NRB4**  
Receptacles with Lead Wire



**#NP12**  
Contact Probes – NP120 / NP120HD Series



**#NP64**  
Contact Probes – NP604 / TP604 Series



**#NP60**  
Contact Probes – NP60HD Series



**#NRB6**  
Receptacles with Wire – NRB120 Series



**#NP84**  
Contact Probes – NP84SF / NP8 Series



**#NP90**  
Contact Probes – NP90SF / NP90 Series







**#NP89**  
Contact Probes – NP89SF / NP89 Series



**#NRB8**  
Receptacles with Lead Wire – NRB84 Series



**#NR10**  
Turn Probes



**#GNP6**  
Contact Probes Assembly – Standard



**#FNP1**  
Contact Probes Assembly – Threaded (FNP10)



**#FNP2**  
Contact Probes Assembly – Resin Sleeve (FNP22)



**#FNPS**  
Contact Probes Assembly – Spring Build-In (FNPS22)



**#MNP5**  
Contact Probes Assembly – Threaded (MNP50)



**#SNP3**  
Switch Probes – SNP Series



**#TNR8**  
Terminals for Probes – TNR Series



**#FNPL**  
Terminals for Probes – FNP Series



**#THUS**  
Heat Shrink Tubes



**#PGPC**  
Circuit Board Guide Pins – Round Cone




**#CPGJ**  
Circuit Board Pusher Pins – Straight with Hole



**#CPRG**  
Circuit Board Rough Guides

**EX** Example

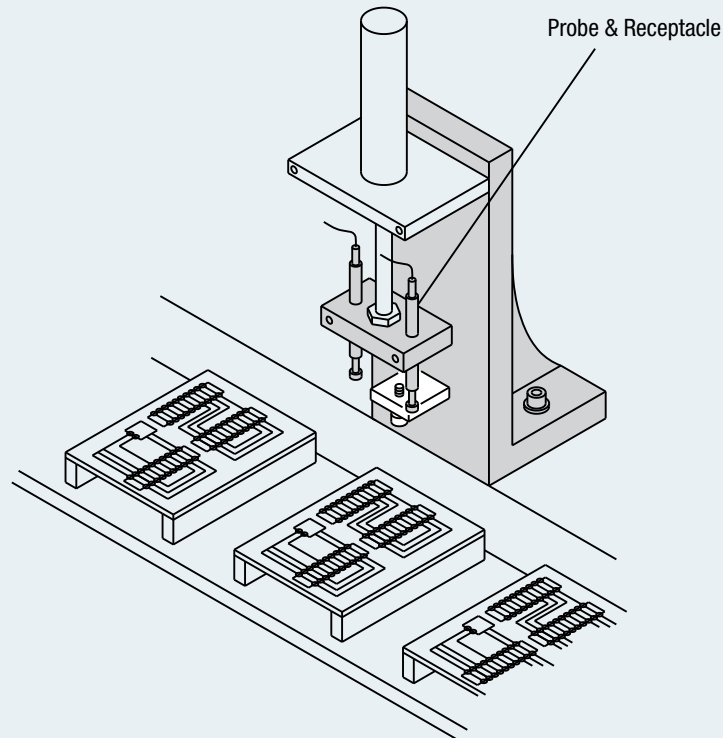



Simplified Adjustment Units

Manual Stages

Type	Manual Stages						Motorized Stages		
	Simplified Adjustment Unit		Standard Precision Stages		High Precision Stages				
Usage, Picture									
	Travel Distance (max)	Load Capacity (max)	Travel Distance (max)	Load Capacity (max)	Travel Distance (max)	Load Capacity (max)	Travel Distance (max)	Load Capacity (max)	
Linear Motion	X	±75 mm	98 N	±65 mm	39 N	±180 mm	343 N	50 mm	98 N
	Z	±50 mm	98 N	±65 mm	49 N	±65 mm	98 N	~15 mm	49 N
	XY	±25 mm	63 N	±35 mm	34 N	±60 mm	330 N	~15 mm	93 N
	XZ, XYZ	—	—	—	—	±12.5 mm	49 N	—	—
Rotary	360°	5~2000 N	—	—	360°	59 N	360°	29.4 N	
Goniometer	—		—		±25°	60 N	—		
Multi Axis	—		—		XY: ±35 mm Rotation: 360°	50 N	—		
Feed Mechanism	– Feed Screw – Push Screw	– Rack & Pinion – Post & Clamp	– Rack & Pinion – Micrometer		– Rack & Pinion – Micrometer	– Feed Screw	—		
Guidance Structure	—		– Dovetail – Cross Roller		– Dovetail – Cross Roller	– Linear Ball Guides	– Linear Ball Guides – Deep Groove Ball Bearings		

\*Table shows units that are already combined. You can build different multi-axis configurations based on application requirements.

**Simplified Adjustment Units**



**#SIX**  
X-Axis Units



**#SIXY**  
XY-Axis Units

**#SIXZ**  
Z-Axis Units




**Manual Stages**



**#SIR**  
Rotary, Tilt Units

**#MSX**  
X-Axis Stages



**#MSX**  
X-Axis Stages

**#MSBP**  
Base Plates for Manual Stage



#MSXY  
XY-Axis Stages



#MSZ  
Z-Axis Stages



#MSRT  
Rotary, Tilt Stages

#MSGO  
Goniometer



#MSXZ  
XZ-Axis Stages

#MSYZ  
XYZ-Axis Stages



#MSMA  
Multi-Axis Stages

#MHFS  
Micrometer Heads, Feed Screws

#SRSC  
Rods, Stands, Cross Clamps

#VNIR  
Vernier Scales for Stage

#CCDA  
CCD Camera Accessories

Motorized Stages



#ACX  
X-Axis Stages – Linear Ball Guide

#ACZ  
Z-Axis Stages – Linear Ball Guide

#ACXY  
XY-Axis Stages – Linear Ball Guide

#ACRT  
Revolving Stages



#MHDT  
Motorized Stage Accessories



Optical Lenses

Sensors / Accessories

Sensor Rails / DIN Rails

**Optical Lenses**



**#LFSL**  
Macro Lenses – Low Magnification



**#LFSH**  
Macro Lenses – High Magnification



**#LTAB**  
Objective Lenses for Microscope



**#LTAA**  
Auto Extension Rings for Objective Lenses



**#LCV**  
CCTV Lenses



**#LRC**  
Rear Converter Lenses



**#LCK**  
Setscrews for CCD Cameras



**#LCVR**  
Close-Up Rings for CCTV Lenses

**Sensors / Accessories**



**#SENJ**  
Brackets and Stands for Sensors



**#SENR**  
Brackets for Sensor Stands/Metal



**#SENP**  
Stands for Sensors



**#SENG**  
Brackets for Sensor Stands – Resin



**#SENS**  
Sheet Metal Stands for Sensor



**#SENI**  
Sheet Metal Brackets for Sensor



**#SENI2**  
Plastic Strut Clamps



**#KSTB**  
For Mounting of Photoelectric Sensor



**#KBSB**  
Bases for Sensor Mounting



**#CMX**  
Bases for Sensor Mounting



**#PSAM**  
Proximity Sensors



**#PSHM**  
Proximity Sensors



**#PSMM**  
Proximity Sensors with Built-In Amplifier – Screw, Heat Resistant



**#SBRK**  
Accessories for Rail – T-Bracket



**#DGM**  
Switch Flags – Round Pole



**#DSB**  
Brackets for Switch Flag



**#DMG**  
Switch Flags – Setscrew, Flat with Tapped Hole



**#DMS**  
Switch Flags – Slit, Flat with Tapped Hole

**Sensor Rails / DIN Rails**



**#SENK**  
Rails for Switches and Sensors – Aluminum, L Dimension Selectable



**#SENA**  
Rails for Switches and Sensors – Aluminum, L Dimension Configurable



**#SENF**  
Rails for Switches and Sensors – Aluminum, L Dimension Configurable



**#SENB**  
Rails for Switch and Sensor – L Dimension, Hole Position Configurable



**#SEN3**  
Rails for Switch and Sensor – Configurable Through Hole, Notched Hole



**#SENM**  
Rails for Switch and Sensor – L Dimension Hole Position Configurable



**#SENS**  
Rails for Switches and Sensors with Scale – L Dimension Configurable



**#MPSE**  
Rails for Microphoto Sensors



**#SQN**  
Bar Nuts



**#2RU**  
Rails for Switches and Sensors – Steel, Standard Length



**#2P**  
Rail Mount Fittings



**#RFM5**  
Nuts for Sensor Rails



**#RXM5**  
Nuts for Sensor Rails



**#DNR2**  
DIN Rails for Switches and Sensors – L Dimension Selectable



**#EYST**  
Simple Stays



**#ETB**  
Grounding Blocks

Switches



**#CMSC**  
Compact Contact Switches – NC



**#CMSM**  
Compact Contact Switches – NO



**#MSTK**  
High Precision Contact Switches – Bolt



**#MSTA**  
High Precision Touch Switches – Tip Shape Selectable



**#MSTT**  
High Precision Touch Switches – Flat, Tapped



**#MSTD**  
Contact Switches – Standard



**#NMK**  
Contact Switches – L-Shaped Cylinder with LED



**#MST8**  
Contact Switches – Bolt, L-Shaped Bolt Switches



**#MST3**  
Contact Switches – Long Stroke



**#MST7**  
Contact Switches – L-Shaped Bolt with LED



**#MST6**  
Contact Switches – Water-Resisting, End Shape Selection



**#MST2**  
Contact Switches with Resin Tip



**#MST4**  
Contact Switches – Tip Shape Selectable



**#NMT**  
Switches with Stoppers – Wide Contact Angle



**#MSTW**  
Switches with Stoppers – Mini Drip-Proof (IP44), Cylinder




**#MSTF**  
Switches with Stoppers – Mini Drip-Proof (IP44), Cylinder with Flange



**#MSN7**  
Switches with Stoppers – Mini Drip-Proof (IP44), Screw



**#MSNF**  
Switches with Stoppers – Mini Drip-Proof (IP44), Screw with Flange



**#MSPM**  
Switches with Stoppers – Mini Drip-Proof (IP44), Ball Contact Screw



**#MSWF**  
Contact Switches with Stoppers – Mini Waterproof, Flanged Cylinder



**#MSNW**  
Switches with Stoppers – Mini Waterproof Screw



**#MSNG**  
Contact Switches with Stoppers – Drip-Proof, Flanged Screw



**#MSTB**  
Switches with Stoppers – Bolt



**#MST1**  
Switches with Stoppers – Hexagon Head



**#NMS**  
Switches with Stoppers – Long Stroke



**#MST5**  
Contact Switches – Heat Resistant (IP65)



**#MSPH**  
Heat-Resisting Ball Plunger Switches



**#MSTR**  
Heat-Resisting Switches with Stopper



**#MSNR**  
Heat-Resisting Switches with Stopper (Mini) Loose Wire Cord



**#MSPS**  
Plunger Switches – Spring Plunger Switches



**#MSPB**  
Positioning Switches – Ball Plunger

Posts / Strut Clamps / Stands



**#POST**  
Posts



**#STND**  
Post Stands and Post Stand Sets



**#FGA**  
Free Guide Arm Sets and Holders



**#CLMP**  
Single Post Strut Clamps



**#DCLM**  
Dual Post Strut Clamps – Perpendicular



**#STCA**  
Strut Clamp Accessories



**#PIST**  
Pipe Stands



**#CIST**  
Rotating Supports



**#SPBL**  
Spacer Blocks

**Gussets**



**#RBDA**  
Gussets – Through Hole, Standard Precision



**#RBPD**  
Gussets – Counterbore Hole, High Precision



**#RBBA**  
Gussets – Tapped Holes, Position Fixed, Standard Precision



**#RBPA**  
Gussets – Standard, High Precision



**#RACA**  
Gussets – Reduced Weight, Tapped Hole



**#RB JW**  
Gussets – Bridge, Tapped Hole



**#RQDB**  
[Economy] Gussets – Precision Casting, Through Hole, Hole Position Fixed

**Angle Plates**



**#IKD**  
Angle Plates – Cast Iron, Standard Dimensions, No Holes



**#AIKD**  
Angle Plate – Stainless Steel, Standard Dimensions, No Hole



**#IK**  
Angle Plates – Mounting Hole Selectable, Hole Position Fixed



**#IKFT**  
Angle Plates – Mounting Surface Tapped, Mounting Hole Position Configurable




**#IKF**  
Angle Plates – Cast Iron, Aluminum, Stainless Casting, Configurable Hole Position



**#IKCD**  
Angle Plates – Bottom Surface Ground, w/ Thru Holes



**#IKKB**  
Opposite Angle Dowels – Cast Iron, Aluminum Cast



**#WIKD**  
Angle Plates Wide



**#BRWB**  
Welded Angles, Compact Type



**#IKYS**  
Welded Angle Plates – Configurable Hole Position

**Welded Standoffs / Metal Boxes**



**#YSCT**  
Welded Steel Stands – Configurable Hole Position



**#YSCF**  
Welded Steel Stands – Selectable Hole



**#YSBP**  
Welded Steel Stands – Plate



**#KBXS**  
Metal Boxes



**#STXS**  
Mounting Base for Metal Boxes

Posts / Strut Clamps / Stands

Gussets

Angle Plates

Welded Standoffs / Metal Boxes

Enter Web Code (ex. #SFJ)



Washers / Collars

Metal Materials	Steel			Stainless Steel			Special Steels	Aluminum	Brass
	1018	1045	1045 Hardened	304	316	420 Hardened	01 Tool Steel Hardened	2017	C3604
Corrosion Resistance	P			E		G	P	G	E
Hardness* (Brinell HB / Rockwell HRC)	~125HB	~180HB	~50HRC	~190HB		~50HRC	~55HRC	~105HB	~202HB
Tensile Strength* (MPa)	~410 MPa	~596 MPa	~1600 MPa	~520 MPa		~1780 MPa	~1900 MPa	~300 MPa	~750 MPa
Density (g/cm <sup>3</sup> )	7.8			7.8			7.8	2.7	8.8

\*The provided values are for reference only.

Resin Material	Polyacetal		MC Nylon		Bakelite		Flouro Resin	PEEK	Epoxy Glass	Polycarbonate	
	White	Black	Standard	Conductive	Paper Base	Cloth Base					
Color	White	Black	Blue	Ivory	Black	Brown	Light Brown	White	Gray	Green	Transparent
Tensile Strength* (MPa)	61 MPa		96 MPa		68 MPa	113 MPa	97 MPa	13.7~34.3 MPa	98 MPa	309 MPa	59 MPa
Operating Temperature (°C)	-45~95 °C		-40~120 °C			-50~100 °C		-40~250 °C	-50~250 °C	-150~180 °C	~110 °C
Sliding Properties	G		G	G	G	A	A	E	G	A	A
Heat Resistance	A		A	A	A	G	G	G	G	A	G
Insulation	G		G	G	G	G	G	G	G	E	E
Abrasion Resistance	A		G	A	A	P	P	G	G	P	P
Dimensional Stability	G		A	A	A	G	G	P	E	G	G
Machinability	E		G	G	G	G	G	G	G	A	G

● Excellent ● Good ● Acceptable ● Fair ● Poor

Washers / Collars



**#WSF**  
Washers for Precision Linear Shafts



**#PPWT**  
Metal Washers (Pkg.)



**#WSSB**  
Metal Washers – Thickness Configurable, Precision Grade



**#WASB**  
Metal Washers – Thickness Configurable, Precision Grade



**#FWS**  
Metal Washers – Standard Class, Configurable



**#SWMB**  
Metal Washers – Standard Class, ID & OD Tolerance Selectable



**#WASH**  
Hardened Metal Washers – Thickness Selectable



**#FWAS**  
Hardened Metal Washers – ID / OD & Thickness Configurable



**#AWSB**  
Metal Washers – Standard, Precision Class, Thickness Tolerance Selectable



**#FTCB**  
Metal Washers – Standard Class, Flanged



**#WZAB**  
Metal Washers – Standard Class, Counterbored



**#WTAB**  
Metal Washers – Standard Class, Tapped



**#WSRB**  
Metal Washers – Standard Class, Countersunk



**#WBAA**  
Metal Washers – Standard Class with Clearance Holes



**#KWSB**  
Metal Washers – Standard Class with Selectable Shape



**#WLM**  
Metal Washers – Standard Class, with Slotted Hole and Pilot



**#TASC**  
Thin-Walled Metal Collars



**#SGP**  
Pipe Collars



**#SMKB**  
Spacers





**#DWSS**  
Simultaneous Grinding Spacers



**#DCLB**  
Stepped Spacers



**#KNCLB**  
Metal Collars – Standard Class



**#AASC**  
Metal Collars – Precision Class



**#FAC**  
Collars – Standard & Precision Class,  
ID / OD & Length Configurable



**#SNCB**  
Collars – Standard & Precision Class,  
ID & OD Tolerance Selectable



**#ASC**  
Hardened Collars – Standard &  
Precision Class, Length  
Configurable



**#TCLA**  
Collars – Standard & Precision  
Class, Flanged, ID & OD Selectable



**#WSJB**  
Resin Washers – Standard



**#SWSP**  
Extra Thin Resin Washers Abrasion  
Resistance



**#SWSJ**  
Resin Washers



**#FWHJ**  
Resin Washers – Flanged, Solid,  
Configurable



**#CLJB**  
Resin Collars – Standard



**#CLJH**  
Resin Collars – Flanged



**#WZJB**  
Resin Washers – Counterbored,  
Standard



**#CLJT**  
Resin Collars – Tapped



**#CLJG**  
Resin Collars with Guide



**#CERC**  
Ceramic Washers – Sheets, Collars



**#CERA**  
Ceramic Collars with Flange



**#DJC**  
Thermal Insulation Washers – Collars




**#DJB**  
Thermal Insulation Collars with  
Flange



**#PKC**  
Resin Washers – Collars (PEEK,  
Epoxy Glass, Fluororesin)



**#PKB**  
Resin Collar with Flange – PEEK,  
Epoxy Glass, Fluororesin



**#WSRJ**  
Square Resin Washers



**#LOWA**  
Standard Metal Washers for  
Fastening

**Shims**



**#CIMRF**  
Shim Rings – Standard, Pack



**#CIMR**  
Shim Rings – Standard



**#CIMA**  
Precision Shim Rings – Standard  
(10 Pcs Pack)



**#PWVW**  
Wave Washers (Pack)



**#CIMW**  
Split Shims – Standard



**#ASAF**  
Square Shims – Slotted Hole,  
Configurable



**#ASAC**  
Square Shims – Round Hole,  
Configurable



**#CIMM**  
Square Shims for Motor Bases



**#PCIM**  
Square Shims for Motor Base for  
Pillow Block Package



Shims

Screws / Bolts


Hooks / Shackles



**#ASA**  
Square Shims with Single Slot



**#CIRA**  
Shim Plates – Standard



**#CIRK**  
Shim Plates – SK Hardened Steel,  
Standard, Configurable



**#FGSM**  
Shim Tapes – 1 m Length



**#CMBO**  
Shim Tape (Box)

Screws / Bolts



**#SHCS**  
Socket Head Cap Screws



**#LOHB**  
Low Head Bolts



**#SDHB**  
Small Diameter Head Bolts



**#SCWA**  
Screw Washer Assembly



**#FHS**  
Flat Head Screws



**#PHDS**  
Pan Head Screws



**#MSCW**  
Precision Micro Screws



**#HLDS**  
Hexalobular Drive Screws



**#STSW**  
Self Tapping Screws



**#SHLB**  
Shoulder Bolts



**#HEXB**  
Hex Head Bolts



**#VASW**  
Vented Screws



**#SETS**  
Set Screws



**#TSRB**  
Threaded Screw Rods and Bolts



**#THMB**  
Thumb Screws



**#CAPC**  
Captive Screws



**#EYEB**  
Eye Bolts, U-Bolts



**#CCSW**  
Cover Caps for Screws



**#RESS**  
Resin Screws



**#CME**  
Hex Wrench



**#CMM**  
Hex Wrench for Low Head Screws

Hooks / Shackles



**#TKC**  
Loss-Prevention Chains – Wires,  
Mounting Brackets



**#SKC**  
Loss-Prevention Chains – Wires,  
Metal Joints



**#RWS**  
Loss-Prevention Chains – Wires,  
Connecting Ring



Screw Washers



**#BSLW**  
Spring Washers (Box)



**#BPWF**  
Flat Washers (Box)



**#PWF**  
Flat Washers



**#SLW**  
Spring Washers



**#PPWF**  
Washers - LOWA



**#NLDF**  
Lock Washers - Small O.D. (Pack)




**#PZAS**  
Tab Washers - One Tab



**#GTS**  
Spring Washers - Conical Disk



**#SSRB**  
Disk Spring Washers



**#ZTQ**  
Tapered Washers - Square

Nuts



**#BLBN**  
Nuts - Right-Hand Thread (Box)



**#BKNT**  
Nuts - Right-Hand Thread (Box)



**#ANN**  
Hex Nuts



**#SNTR**  
Compact Nuts (Pack)



**#NT**  
Tall Nuts



**#NTFL**  
Configurable Length Hex Nuts



**#UNUT**  
U-Nuts (Pack)



**#HLN**  
Double Locking Nuts



**#FNT**  
Domed (Acorn) Nuts



**#FRNT**  
Knurled Thumb Nuts



**#QCN**  
Quick-Lock Nuts - Thumb



**#RNLB**  
Cylindrical Nuts with Hex Socket



**#RBNT**  
Cylindrical Nuts



**#FRNU**  
Flanged Nuts



**#CRNT**  
Knurled Thumb Nuts with Side Holes



**#NTS**  
T-Nuts



**#ZTN**  
Tapered Nuts - Square



**#NSQ**  
Rectangular Nuts with Threaded Hole



**#FKT**  
Square Washers & Nuts with One Clearance Hole



**#FK2T**  
Rectangular Washers & Nuts with Two Clearance Holes



Machine Keys

Screw Plugs

Dowel, Spring & Stepped Pins

Cotter Pins

**Machine Keys**



**#KED**  
Selectable Length Keys



**#KEDF**  
Configurable Length Keys



**#KEDZ**  
With Counterbores



**#KEDY**  
With Tapped Counterbores



**#KEDW**  
With Counterbores & Tapped Holes



**#KEDM**  
With Tapped Hole



**#KETS**  
Machine Keys – Stainless Steel



**#KTH**  
Tapered Machine Keys with Gib Head

**Screw Plugs**



**#MSW**  
Screw Plugs – Standard

**Dowel, Spring & Stepped Pins**



**#MS**  
Oversized – One End Chamfered, One End with Radius



**#MSCM**  
Oversized – Both Ends Chamfered



**#MSV**  
Oversized – High Precision



**#MSTP**  
Oversized – Both Ends Chamfered



**#THS**  
Oversized – Pull-out with Thru Hole



**#MST**  
Oversized – Pull-out with Air Vent



**#MTT**  
Oversized – Tapered



**#MSH**  
Undersized – One End Chamfered, One End with Radius



**#MSHH**  
Undersized – Both Ends Chamfered



**#MSGB**  
Undersized – General Purpose



**#MSHT**  
Undersized – Pull-Out



**#MSTG**  
Oversized – Pull-Out with Air Vent (g6)



**#MSTH**  
Undersized – Pull-Out with Air Vent (h7)



**#KNHN**  
Dowel Removal Jigs



**#MSY**  
Dual Fit – One End Oversized, One End Undersized



**#MSYT**  
Dual Fit – Pull-Out



**#MSFW**  
Stepped Dowel Pins



**#MSIP**  
Insulating Dowel Pins



**#MSIJ**  
Resin Dowel Pins



**#SSPR**  
Spring Pins

**Cotter Pins**



**#JNPN**  
Hairpin Cotter Pins



**#NPN**  
Cotter (Split) Pins

Retaining Rings



**#STWN**  
Retaining Rings - External, C-Type



**#NETW**  
Retaining Rings - External, E-Type



**#RTWN**  
Retaining Rings - Internal, C-Type



**#RTWP**  
Retaining Ring Pliers

NEW



**#BSTW**  
Retaining Rings - C-Type, External (Box)



**#BNET**  
Retaining Rings - C-Type, External (Box)

Inserts



**#HLSS**  
Thread Inserts



**#HLSX**  
Taps for Thread Inserts



**#HLTP**  
Thread Insert Installation Tool



**#HLTB**  
Thread Insert Tang Breaking Tool



**#HLTN**  
Thread Insert Removal Tool



**#TLTS**  
Thread Inserts - Tangless



**#TLTK**  
Taps for Tangless Inserts



**#TLTN**  
Tangless Inserts Installation - Removal Tools



**#ENT**  
Self-Tapping Inserts - Slotted



**#ENTP**  
Self-Tapping Inserts Installation Tool



**#BHLT**  
Thread Insert (Box)



**#BTLT**  
Thread Insert (Box)

Wires / Chains / Metal Fittings / Small Work Pieces



NEW

**#CWAB**  
Fastening Wire-Loop - Dia. Configurable



**#SCHS**  
Loss-Prevention Stainless Steel Chain



**#BALL**  
Loss-Prevention Ball Chains

Grease Fittings



**#CHSP**  
Loss-Prevention Chain



**#GPA**  
Grease Fittings - Straight



**#GPB**  
Grease Fittings - 67.5 degree



**#GPC**  
Grease Fittings - 90 degree

Stickers / Plates



**#HH**  
Temperature Recording Labels



**#ARWS**  
Arrow Stickers - Straight



**#APWS**  
Arrow Plates - Straight



**#AWRB**  
Arrow Stickers - Curved

Cotter Pins

Retaining Rings

Inserts

Wires / Chains / Metal Fittings / Small Work Pieces

Grease Fittings

Stickers / Plates



Stickers / Plates

Parts / Small Work Pieces

Magnets



**#KHPT**  
Open/Closed Sign Plates




**#LRM**  
Warning/Danger Triangular Stickers



**#LRDM**  
Caution/Warning/Danger Mark Stickers



**#CHC**  
Caution/Warning/Danger Stickers



**#TMEL**  
Scale Tape



**#MEAA**  
Angle Scale - 180 Deg.



**#MEAN**  
Angle Scale with Adhesive Tape



**#SMTP**  
Bubble Level - Flanged Mounting



**#SMH**  
Bubble Level - Press-Fit



**#MES**  
Scale Plates



**#PPL**  
Pointing Plates



**#DW**  
Retaining Washers




**#PWW**  
Crimp Brackets (Package)



**#WWN**  
Crimping Tools



**#UKC**  
Attachment for Anchoring Wire




Magnets




**#HYN**  
Magnets - Cylindrical




**#MGLF**  
Magnets - Rectangular, Neodymium



**#HXP**  
Magnets - Flexible, Super Strong



**#HXRS**  
Magnets - Flexible, Rectangular Sheets



**#HXR**  
Magnets - Flexible, Roll



**#HXUK**  
Magnets - Oval Holder with Mounting Holders, Counterbored, Tapped



**#HXU**  
Magnets with Holder - Tapped



**#HX**  
Magnets with Holder - Tapped, Short



**#MGN**  
Magnets with Holder - Tapped, Long



**#MGR**  
Magnets with Holder - Knurled



**#HYM**  
Magnets with Holder - V Groove



**#HXYB**  
Magnets - Threaded



**#HXBB**  
Screw Stoppers with Magnet



**#MGE**  
Electromagnet Holders



**#MGEC**  
Rectifier for Electromagnet



Type	Unpolished (Drawn)	Milled Finish	Rotary Grinding Finish	Surface Grinding Finish
Finished Surface				
Surface Roughness	—	Side Surface 1.6a, Top-Bottom Surface 6.3a	Top-Bottom Surface 3.2a	Top-Bottom Surface (Iron) 1.6a, (Stainless/Aluminum) 3.2a
Flatness (mm)	—	0.03~0.015 mm	0.012~0.05 mm	0.012~0.05 mm
Parallelism (Top-Bottom)	—	0.05~0.1	0.012	0.012

Material Selection						
Carbon Steel	1018	1018 Annealed	1049	1055 Normalized	1049 Thermally Refined	
Tool Steel	A2	D2	DC53	M2	O1	SKS93
Pre-Hardened Steel	PX5	NAK55	Toolox44	G-Star		
Alloy Steel	4140					
Stainless Steel	430			440C		
Aluminum Alloy	6061	50552	5052 High Precision	2017	ANP79 (7000Series)	7075
Roller Copper	Tough Pitch Copper C11000		Oxygen Free Copper C10200		Chrome Copper (JIS Z3234 Class 2)	
Brass	Brass (C28000 Brass 1/4)		Titanium (Class 2 TP3240H)			

Metal Materials

## Metal Materials



**#MTPB**  
Metal Plates, Blocks



**#MTCP**  
Metal Circular Plates



**#MTRD**  
Metal Rods



**#MTHR**  
Metal Hex Rods



**#MTPI**  
Metal Pipes, Metal Tubes



**#MTLA**  
Metal L-Shaped Angles



**#MTUC**  
U-Shaped Channels



**#MTLB**  
L-Shaped Blocks



**#MTUB**  
U-Shaped Blocks



**#MTTB**  
T-Shaped Blocks



**#MTIB**  
Inclined Blocks




Plastic Materials

Springs

Resin Material	MC Nylon	Polyacetal	UMHW	Flourine Resin	PEEK	PPS	ABS	PBT	Free-Cuting Resin (Unilate)
Tensile Strength	66-96 MPa	42-61 MPa	35-45 MPa	11-34 MPa	75-130 MPa	75-85 MPa	39 MPa	49 MPa	65 MPa (Horizontal) 110 MPa (Vertical)
Operating Temperature	-40~150°C	-45~90°C	-100~80°C	40~260°C	-50~250°C	Room~220°C	Room~50°C	Room~120°C	Room~120°C
Abrasion Resistance	G	E	E	G	G	G	F	F	F
Sliding Properties	G	E	E	E	G	F	F	G	F
Impact Resistance	G	G	E	G	G	F	G	G	G
Dimensional Stability	F	G	F	P	G	E	E	G	G

● Excellent ● Good ● Fair ● Poor

**Plastic Materials**



**#RSQP**  
Resin Plates



**#RRPL**  
Resin Round Plates



**#RR0D**  
Resin Rods



**#RPI**  
Resin Pipes


**Springs**



**#AUA**  
Extra-Light, Light, Light to Medium, Medium Load



**#AUT**  
Tension Springs - Heavy Load



**#UFSP**  
Extension Springs - Configurable Lengths



**#LUS**  
Extension Springs - Long



**#HBFK**  
Plate Hook for Long Extension Spring



**#LUSH**  
Solid Coil Springs Hook Insertion



**#AIPO**  
Spring Anchors - Wrench Flats



**#AIPK**  
Spring Anchors - Wrench Flats with Notch



**#ASPL**  
Spring Anchors - L-Shaped, Hole



**#ARPO**  
Spring Anchors - Socket Head Cap Screw



**#DSP0**  
Spring Anchors - Hexagonal



**#BSP0**  
Spring Anchors - Flat Head Screwdriver with Groove



**#YJPO**  
Posts for Tension Springs - Roller



**#SRBN**  
Disc Springs





#IBN  
Flat Springs



#UA90  
Torsion Springs



#CFS  
Constant Load Spring



#SPGC  
Washers for Compression Springs – Standard



#SPGM  
Washers for Compression Springs – Tapped



#SSWA  
Washers – SW



#WR  
Round Coil Springs – WY/WR O.D. Referenced



#WF  
Round Coil Springs – WF/WL O.D. Referenced



#WM  
Round Coil Springs – WT/WM O.D. Referenced



#WB  
Round Coil Springs – WH/WB O.D. Referenced



#VUF  
Round Coil Springs – I.D. Referenced



#UF  
Round Coil Springs – O.D. Referenced Stainless Steel



#UL  
Round Coil Springs – O.D. Referenced Stainless Steel



#UH  
Round Coil Springs – O.D. Referenced Stainless Steel



#UBB  
Round Wire Springs Spring Constant 4.9-29.4 N/mm



#FUF  
Compression Springs – Configurable Length



#SWY  
Coil Springs – Ultra-High Deflection SWY



#SWU  
Coil Springs – Ultra Deflection SWU



#SWR  
Coil Springs – High Deflection SWR



#SWS  
Coil Springs – Medium Deflection SWS



#SWF  
Coil Springs – Light Load SWF



#SWL  
Coil Springs – Light Load SWL



#SWM  
Coil Springs – Medium Load SWM



#SWH  
Coil Springs – Heavy Load SWH



#SWB  
Coil Springs – Ultra-Heavy Load SWB

Shock Absorbers



#MAK  
Shock Absorbers – Non-Adjustable Preset Dampening



#CMA  
Shock Absorbers – Adjustable



#EMAC  
Shock Absorbers – Economy



#MAC  
Shock Absorbers – Adjustable Dampening



#OPCP  
Eccentric Angle Adapters – Adjustable Dampening



#STNC  
Stopper Nuts – Adjustable Dampening



#MAMS  
Shock Absorbers – Compact



#MAMK  
Shock Absorbers – Compact Fixed



#MACC  
Shock Absorbers – Coolant Resistant



Gas Springs

Sound Proofing / Antivibration

Safety Protection Materials

**Gas Springs**



**#FGSS**  
Gas Springs – Mounting Direction Free, FGSS



**#FGS**  
Gas Springs – Limited Mounting Direction with Rigid Ends, FGS



**#GSBR**  
Mounting Brackets for Gas Springs – FGS/FGSS



**#GSS**  
Gas Springs – Limited Mounting Direction with Floating Ends, GSS



**#HFBR**  
Gas Springs – Gas Reaction Force Configurable



**#FRGS**  
Gas Springs – Stainless Steel

**Sound Proofing / Antivibration**



**#DBGO**  
Electroconductive Antivibration Rubber Mounts – Both Threaded



**#DBGN**  
Antivibration Rubber Mounts, One End Threaded, One End Tapped



**#BGOM**  
Antivibration Rubber Mounts – Both Ends Threaded



**#BGON**  
Antivibration Rubber Mounts – One End Tapped, One End Stopper Plate



**#BGEL**  
Washers with Antivibration Gel – Both Ends Threaded, Standard




**#BGE2**  
Antivibration Gels – One End Threaded, One End Stopper Plate




**#GELB**  
Antivibration Gel Bushings




**#HBGE**  
Antivibration Gels – One End Threaded, One End Stopper Plate with Rubber Jacket



**#BGEG**  
Antivibration Gel Sheets without Adhesive




**#BPAS**  
Antivibration Pads – Standard



**#RUBL**  
Antivibration Pads – RUBLOCK (for Low Frequency), Standard



**#BS2F**  
Sound Proofing Materials – Standard Sizes




**#FBS2**  
Vibration Control – Sound Absorption with Adhesive, Configurable



**#BMPK**  
Safety Protection Materials – Rubber Bumper Pads, Square



**#FJFV**  
Adjustment Pads – Antivibration



**#KMBS**  
Antivibration Mounting Plates



**#FBF**  
Antivibration Pads – Light Load



**#FBR**  
Antivibration Pads – Heavy Load




**#KFJA**  
Antivibration Mounts – Round


**Safety Protection Materials**



**#BON1**  
Adhesives for Urethane



**#PRGC**  
Safety Protection Materials – Protection Materials, Shock Absorption Material



**#ADTR**  
Double-Sided Adhesive Tape for Rubber Standard for Silicon



**#TRAT**  
Trims, Thermoplastic Elastomer (TPE)



**#TRIN**  
Corner Trims




**#TRSA**  
Trim Seals, Thermoplastic Elastomer (TPE)



**#TRSE**  
Low Rebound Trim Seals – Airtight, Wide Angle





NEW

**#CTR2**  
Compact Trims – Plastic Cover Plates




**#CTRT**  
Compact Edge Trim



**#PTRT**  
Resin Trims




**#PRGD**  
Safety Protection Materials – D Shaped Rubber Bumper



NEW

**#PRGM**  
D Rubber – Bumpers for Corner




**#PRTR**  
Security Symbol Tape



**#PRGS**  
Safety Protection Materials – Small Corner Covers for Edges



**#PRGF**  
Safety Protection Materials – Corner Covers for Edges




**#PRG1**  
Safety Protection Materials – Corner Covers 34mm Width



**#PRGL**  
Safety Protection Materials – Large Corner Covers for Edges



**#BOND**  
Moment Adhesives for Rubber or Silicone



Antistatic Materials



**#EPAT**  
Sponge Tapes



NEW

**#ECRC**  
Electroconductive Rubber Feet with Collar



**#ECRK**  
Electroconductive Rubber Feet



**#GOMA**  
Rubber Feet Receiver Cups



NEW

**#RBDL**  
Antistatic Rubber Sheets – Sheet/Roll




**#RBDE**  
Grounding Plates



**#RBDDB**  
Antistatic Rubber Sheets




**#LBA**  
Polyethylene Foam for Antistatic



**#LBNC**  
Antistatic Sponge Sheets – Polyethylene Foam



**#EBRS**  
Neutralization Brushes



**#ECTP**  
Copper Foil Tape



**#ELTA**  
Neutralization Tapes

Industrial Brushes



**#URBS**  
Roll Brush – Interchangeable



**#BRUN**  
Roll Brush



**#BRUP**  
Roll Brush – Channel Roll Brush, Pitch Configurable




★

**#BRUE**  
Channel Brush



NEW

**#BRUA**  
Attachment Brackets for Channel Brushes – Vertical Mount



NEW

**#BRU2**  
Attachment Brackets for Brushes – Angle Adjustable



**#BRUS**  
Attachment for Channel Brush

Enter Web Code (ex. #SFJ)




Urethane / Rubber / Sponge / Felt



Mechanical Strength	Silicon	Low Elastic	Butyl	Ethylene	Nitrile	Fluorine	Chloroprene	Urethane
Weather Resistance	Nitrile	Low Elastic	Chloroprene	Urethane	Butyl	Silicon	Ethylene	Fluorine
Abrasion Resistance	Silicon	Low Elastic	Butyl	Ethylene	Chloroprene	Urethane	Nitrile	Fluorine
Heat Resistance	Low Elastic	Urethane	Nitrile	Chloroprene	Butyl	Ethylene	Silicon	Fluorine
Oil Resistance	Butyl	Ethylene	Silicon	Chloroprene	Urethane	Low Elastic	Nitrile	Fluorine

Allowable Operating Temperature [°C]

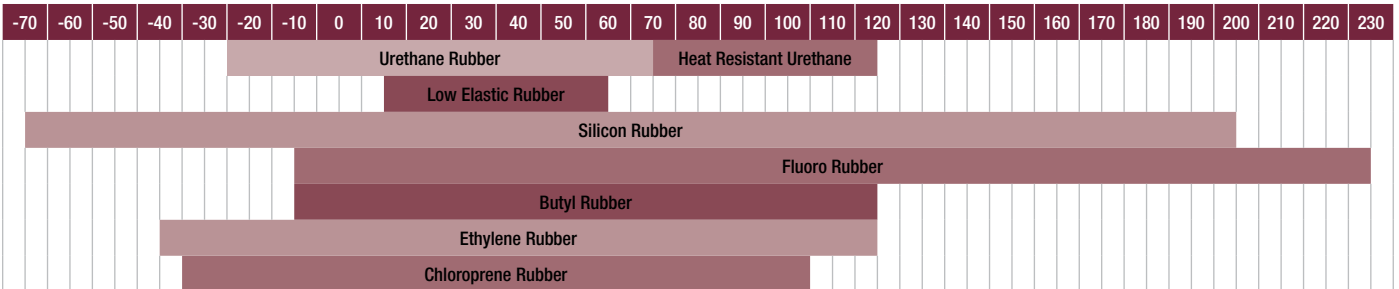

**Urethane / Rubber / Sponge / Felt**



**NEW**

**#PURW**  
Urethane Washers – Rubber Washers (Package)



★

**#UAFH**  
Urethane Washers



**NEW**

**#URWH**  
Urethane Washers – Adhesive



**#WRBA**  
Rubber Washer



**#WSEA**  
Sponge Washers



**#CXH**  
Urethane Bumpers – Standard Length



**#RBXA**  
Rubber Bumpers



**#ASGA**  
Sponge Bumpers



★  
**#AAFH**  
Urethane Bumper – Fully Configurable



**#AYFH**  
Bumpers with Metal Washer – Urethane, Antistatic Polyurethane, Rubber



**NEW**

**#AZKH**  
Urethane, Rubber Baked Bumpers



**#NBBK**  
Urethane Rubber Bumpers – Threaded



★

**#AZCH**  
Urethane Bumpers – Counterbored



★  
**#AZAH**  
Urethane Bumpers – Counterbored, Fully Configurable



**#AZC**  
Collars for Counterbored Urethane Bumpers



**#RBZK**  
Rubber Bumpers – Counterbored Rubber Bumpers, L Dimension Selectable



**#RBZA**  
Rubber Bumpers – Counterbored, Fully Configurable



**#UBFF**  
Urethane and Rubber Bumpers with Spherical Tip



**#UTTH**  
Urethane and Rubber Bumpers with Tapered Tip



**#DXFH**  
Urethane/Rubber Bumpers with Pilot



**#RBCA**  
Urethane/Rubber Bumpers - Cap



**#GELM**  
Shock Absorbing Bumpers - Tapped, Threaded



**#UTL**  
Urethane Sheets - Standard



**#UTSL**  
Urethane Sheets - Standard



**#UTSC**  
Ceramic Urethane Sheets



**#UTEX**  
Highly Abrasion Resistant Urethane, Heat Resistant Urethane Sheets



**#LUTN**  
Antistatic Urethane Sheets, Low Rebound Urethane Sheets



**#NTUH**  
Urethane Sheets with Oil-Resistant Adhesives



**#UTPF**  
Metal-Plated Urethane Sheets - Flat, Standard A Dimension



**#BUTL**  
Urethane/Rubber Blocks



**#RBNM**  
Nitrile Rubber Sheets



**#RBCM**  
Chloroprene Rubber Sheets - Standard, Non-Staining



**#RBEW**  
Ethylene Rubber Sheets



**#AMSE**  
Amber Color Rubber Sheets



**#RBRM**  
Butyl Rubber Sheets



**#RBFM**  
Fluoro Rubber Sheets - Standard A/B Dimensions



**#RBAM**  
Silicon Rubber Sheet - Standard A/B Dimensions



**#UNLE**  
Low Elastic Rubber Sheets - Standard A/B Dimensions



**#GELH**  
Shock Absorbing Bumpers Plate - Holder



**#SUTL**  
Urethane Sheets - Very Low Hardness (Shore A15)



**#GELS**  
Silicon Gel Sheets




**#STHV**  
Anti-Skid Rubber Sheets



**#STPE**  
Nonskid Rubber Sheets



**#LRBA**  
Low Friction Rubber Sheets



**#SGNA**  
Urethane, Rubber Sponge, Configurable A/B Dimensions



**#SNPG**  
Low Elastic/Antistatic Low Repulsion, Low Strain Sponge Sheets



**#POLS**  
Heat Insulation Polyimide Sheets



**#WSP0**  
Heat Insulation Polyimide Washers



**#EPA**  
Dustproof General - Purpose Sponges



**#SOFR**  
Special Foam Polyurethane SOFRAS - Sheet



**#SOFS**  
Special Foam Polyurethane SOFRAS - Rolled



**#FELH**  
Felt Sheets



**#BFEL**  
Felt Bumpers



**#EPA2**  
Sponge Tapes



**#RBGE**  
Round Cord – Sealing Elastomer



**#RBWR**  
Rubber Cord – Round Ring



**#RBWF**  
Rubber Sponge – Round Cords



**#RBKW**  
Rubber Sponge – Square Cords



**#KYHF**  
Rubber – Trapezoidal Dome Cords



**#KMHP**  
Rubber Sponge – Round Dome Cords



**#FUHA**  
Urethane Gaskets – Circular



**#FUHH**  
Urethane Gaskets – Square



**#FRNA**  
Rubber, Sponge Gaskets – Circular




**#FRCH**  
Rubber, Sponge Gaskets – Square



**#HPRI**  
Heat Insulation Sponges



**#BASO**  
Heat and Sound Insulation Sponges – Melamine Resin Foam



**#HOPA**  
Heat Insulation Sponges – High Heat Resistant Polyimide, Foam



**#HOPE**  
Heat Insulation Sheets



**#HOPT**  
Heat Insulation Tapes





**#BONU**  
Adhesives for Urethane



**#ADT2**  
Double-Sided Adhesive Tape for Rubber Standard for Silicon


**ex** Example

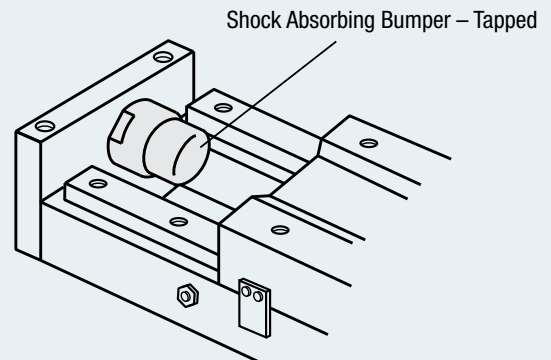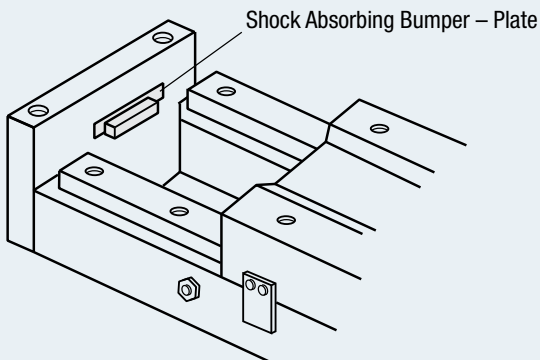

Enter Web Code (ex. #SFJ)



Series	Slot Width (mm) 	Basic Square Size (mm)										
		15	20	25	30	40	45	50	60	80	90	100
Series 3	3.4	•										
Series 5	6		•	•		•						
Series 6	8				•			•	•			•
Series 8	10					•				•		
Series 8-45	10						•	•	•		•	•
Other	Cut To Length (no cutting charges)	in 0.5mm increment up to 4000mm										
	Stock Length	1000mm, 4000mm										

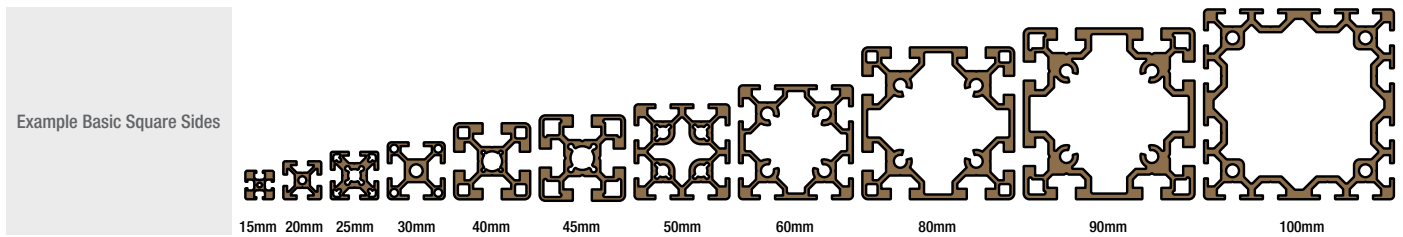


Aluminum Extrusion




#AEXP Standard Profiles




#AEXB 90 Deg. Brackets



#AECB Corner Brackets




#AEBJ Blind Joints



#AEBB Blind Brackets



#AEXG Estrusion Gussets



#AEB Post-Assembly Brackets



#AEPB Other Connectors



#AEAB Angle Brackets




#AESB Sheet Metal Brackets



#TNUT T-Nuts, Wshers



#AES Extrusion Screws



#ECAP End Caps



#AEA Extruded Angles



#FNS Fence Extrusion



#FLTE Flat Extrusion



#ALCH Aluminum Channels



#SFNC Safety Fence Frames



#SDOR Extrusion for Slide Doors



Aluminum Extrusion

Pipe Frames

Perforated Metals / Fences / Nets / Panels



**#FKIT**  
Frame Units



**#SLOT**  
Slot Cover



**#AEPH**  
Pull Handles for Extrusion



**#AEHG**  
Hinges



**#AECL**  
Catches and Locks




**#AECT**  
Casters for Extrusion



**#AEAM**  
Adjusting Mounts



**#AEFU**  
Foot Bases



**#AEP**  
Panel Mounts



**#AECU**  
Curtains, Sheets



**#AEDS**  
Door Sliders



**#AEHH**  
Clamps, Holders, Hooks



**#AECC**  
Conveyor Parts for Extrusion



**#XJIG**  
Jigs, Maintenance Parts

Pipe Frames



**#FFA**  
Factory Frames



**#PFS**  
Pipe Frames – Configurable Length



**#PFSM**  
Curved Pipe Frames



**#PFSA**  
Aluminum Pipe Frames – Configurable Length



**#PFSU**  
Stainless Steel Pipe Frames



**#PFOT**  
Casters – Leveling Mounts for Pipe Frames



**#PFJB**  
Lifting Parts



**#PCON**  
Conveyor Parts for Pipe Frames



**#FFH**  
Hinge



**#PTOL**  
Assembly Tools



**#PCLM**  
Clamps, Accessories



**#PKIT**  
Pipe Frame Units



**#PJNT**  
Joints for Pipe Frames

Perforated Metals / Fences / Nets / Panels



**#PAAL**  
Aluminum Panels



**#PASU**  
Stainless Steel Panels



**#PAST**  
Steel Panels



**#HFPA**  
Cover Plates



Enter Web Code (ex. #SFJ)



#PAPD  
Painted Panels with Holes




#PAPJ  
Painted Panel with Vent Holes




#PAAE  
Painted Steel / Aluminum Panels –  
Selectable Shapes



#PMS  
Perforated Metal – Standard



#PMST  
Perforated Metals With Frame –  
Fixed Dimension



#PMLU  
Perforated Metal – Round Hole  
Parallel



#PMSF  
Perforated Metal – Framed



#PMC  
Perforated Metal – Circular




#PMSL  
Perforated Metal – L-Shaped



#PBD  
Plywood/Particle Boards –  
Rectangular




#ATBD  
Soft-Edge Laminated Plywoods




#ALBH  
Laminated Plywood with Edge  
Molding




#PACL  
Stainless Steel Panels with  
Protective Sheet



#NETS  
Net Plates with and without Frame



#FENM  
Fence Nets – Welded




#NETU  
Fence Nets – Meshed, Stainless  
Steel



#EXPM  
Folding Nets – No Frame



#EXPF  
Folding Nets – Framed



#PMTF  
Framed Mesh



#PMT  
Mesh – Cut to Size



Glass / Mirror



#FGLK  
Fused Silica Plates – Square,  
Configurable



#FGLM  
Fused Silica Plates – Round,  
Configurable



#GLKF  
Square Glass Plates – Standard A/B  
Dimensions



#GLMF  
Round Glass Plates – Standard  
Diameters



#MRA  
Mirrored Plate – Acrylic



#GLFB  
Flange Base for Observation  
Port – Standard



#GLFC  
Flange Cover for Observation  
Port – Standard



#GLSE  
Observation Port Set – Standard



Ceramics



#CERR  
Ceramic Rods



#CEA  
Ceramic Plates



#CEMN  
Ceramic Plates – Larger Size



#PCEA  
Ceramics Circular Plates with Holes

Perforated Metals / Fences / Nets / Panels

Mesh

Glass / Mirror

Ceramics



Material	PET			Acrylic			Polycarbonate			Anti-Static PVC	
Available Colors	Smoke Brown	Orange	Transparent	Smoke Brown	Orange	Transparent	Smoke Brown	Smoke Gray	Transparent	Smoke Brown	Transparent
Transmittance (Light/Opacity)	28~30%	45%	77~87%	25~34%	43%	79~93%	35%	33%	86~91%	29%	80%
Operating Temperature	-15~55 °C			-30~80 °C			-30~100 °C			-30~60 °C	
Width [mm]	20~300	20~1000	20~1000	20~300	20~1000	300~900	20~300	20~1000		100~900	
Length [mm]	20~300	20~2000	20~2000	20~300	20~2000	300~1100	20~300	20~2000		100~1100	
Thickness [mm]	0.5, 1.5	1, 2, 3, 4, 5, 8	1, 2, 3, 4, 5, 8	0.5, 1, 1.5, 2	3, 4, 5, 6, 8, 10, 15, 20, 25	3, 5, 8	0.5, 1, 1.5, 2	3, 4, 5, 6, 8, 10		3, 5	
Special Features	<ul style="list-style-type: none"> <li>- Approx. 4 times stronger impact resistance than acrylic</li> <li>- Environmentally-friendly</li> <li>- Cost-effective</li> </ul>			<ul style="list-style-type: none"> <li>- Curved Panels available</li> <li>- Low-cost panels available</li> <li>- Widest light transmittance (opacity) range</li> <li>- Weather resistant and good for use outdoors</li> <li>- Easily machinable</li> </ul>			<ul style="list-style-type: none"> <li>- Highest impact strength in the group (30 times higher than acrylic plates)</li> <li>- Widest temperature range</li> </ul>			<ul style="list-style-type: none"> <li>- Highly chemical and flame resistant</li> <li>- Anti-static</li> <li>- Cost-effective</li> </ul>	
Cost \$	\$			\$\$			\$\$			\$\$	


**Transparent Plastic Covers**



**#RDJA**  
Resin Rods – Transparent



**#PIJ1**  
Transparent Resin Hollow Tubes



**#PYA**  
PET Plates



**#PYA2H**  
PET Plates



**#ENBT**  
PVC Plates



**#ACA**  
Acrylic Plates




**#ACA2H**  
Acrylic Plates




**#ACAE**  
[Economy] Acrylic Plates




**#ACAM**  
Acrylic Plates Curved Panels



**#PCTA**  
Polycarbonate Plates



**#PCTA2H**  
Polycarbonate Plates



**#ACSH**  
Resin Sheets – Resin Films



**#ACAL**  
Plastic Cover Plates – L-Shaped



**#ACAU**  
Plastic Cover Plates – U-Shaped



**#ENJA**  
Resin Circular Plates with Holes



**#SAC**  
Acrylic Cases

Enter Web Code (ex. #SFJ)



Casters

Wheel Material	Synthetic Rubber	Conductive Rubber	Urethane	Special Reinforced Plastic	MC Nylon	(White) Nylon	PEEK	Phenol	Casting
Abrasion Resistance	E	E	E	F	E	G	G	G	E
Oil Resistance	F	F	G	G	E	E	E	E	E
Water Resistance	E	E	G	G	E	E	G	G	G
Noise	E	E	G	F	F	P	F	F	P
Allowable Load	F	F	E	E	E	F	E	E	E
Moving Resistance	F	F	G	G	E	G	G	E	G
Operating Temp.	-5~60°C	-5~60°C	-20~80°C	-20~80°C	-20~120°C	-10~120°C	-50~250°C	-40~180°C	-40~200°C
Cost \$	\$	\$\$	\$\$	\$\$	\$\$\$	\$	\$\$\$	\$\$\$	\$\$

Conductive Materials: We offer Conductive Rubber and some MC Nylons

● Excellent ● Good ● Fair ● Poor

## Casters



**#CMPL**  
Casters – Threaded, Swivel with Plate



**#CPHA**  
Foot Mount Brackets



**#CLGJ**  
Miniature Casters – Swivel



**#CNGA**  
[Economy] Casters – Mounting Bracket



**#CHAJ**  
Casters



**#CHAS**  
Caster Light Load



**#CNGJ**  
[Economy] Casters – Swivel



**#CRJD**  
Casters – Conductive, Swivel



**#CMGJ**  
[Economy] Casters – Swivel



**#CJM**  
Casters – Medium Load, Swivel



**#CSPJ**  
Compatible Casters – Swivel



**#CMGV**  
[Economy] Casters – Swivel, Locking



**#CMTW**  
Casters – Double Lockable



**#CMTY**  
Casters – Safety Pedal



**#CHJF**  
Casters – Low Floor, Swivel



**#CGJF**  
Casters – Ultra Low Profile, Lightweight



**#CGZJ**  
Casters – Super Heavy Load, Low Profile, Lightweight



**#CSHN**  
Casters – Medium to Heavy Load



**#CJH**  
Casters – Heavy Load, Swivel



**#CSHK**  
Casters – Heavy Load, Swivel



**#CKZJ**  
Casters – Very Heavy Load, Swivel



**#CSTU**  
Casters – Threaded



**#CNGN**  
[Economy] Casters with Insert – Light Load



**#CLTU**  
Casters – Threaded



**#CSMN**  
Casters – Stainless Steel, Screw-in



**#CRMN**  
Casters – Conductive, Screw-in



**#HSG1**  
Screw-In Casters – Light/Medium Load



**#CMGN**  
[Economy] Casters – Screw-in



**#CSJT**  
Casters – Threaded



**#CHJN**  
Casters – Low Floor, Screw-In



**#CPHM**  
Mounting Plates for Side Mount Casters



**#CWMP**  
Casters – Double Wheel, Medium Load



**#CKXJ**  
Casters – Super Heavy Load



**#CWMJ**  
Casters – Double Wheel



**#CWG**  
Casters – Double Wheel, Stainless Steel



**#CMAZ**  
Casters with Adjustment Pads – Ultra Light Load



**#CMJZ**  
Casters with Adjustment Pads – Lightweight



**#CMPD**  
Casters – Threaded



**#CLAR**  
Casters with Adjustment Pads – Antivibration



**#CLDK**  
Casters with Leveling – Antivibration, Heavy Load



**#CMAF**  
Casters with Adjustment Pads – Light Load



**#CMAS**  
Casters with Adjustment Pads – Medium Load



**#CGAN**  
Casters with Adjustment Pads – Heavy Load, Integrated



**#CLAM**  
Casters with Adjustment Pads – Heavy Load



**#CDAN**  
Casters with Adjustment Pads – Large Diameter Wheel



**#CAZL**  
Casters with Integrated Plate and Adjustment Pad – MC Nylon Wheel



**#HCFF**  
Casters and Adjustment Pads Assembly – Custom Mounting Hole



**#CMPG**  
Casters – Vibrations Insulating



**#CHEP**  
Casters for Clean Environment – Plate with Swivel



**#CPBK**  
Cast Casters – Swivel



**#CSTK**  
Cast Casters – Heavy Load, Swivel



**#CHAM**  
Design Casters – Plate



**#CTBM**  
Design Casters



**#CTGM**  
Dual Wheel Casters



#CTEJ  
Design Casters



#CTYN  
Design Casters



#CPNB  
Design Casters – Insert



#CHBF  
Ball Casters – Round Flange



#CSJM  
Resin Casters



#RVAB  
Wheel



#CMHD  
Caster Holders



#FLOC  
Floor Stoppers – Space Saving



#FLOZ  
Floor Stoppers – Height Adjustable



#FLOK  
Floor Stoppers



#FLOR  
Floor Locks

Wheels



#GYUL  
Replacement Wheels for Casters



#GYUW  
Replacement Wheels for Casters



#RVA  
Replacement Wheels for Casters – Rubber Wheel



#KCRB  
Wheel Shafts for Casters

Leveling Mounts / Rubber Feet



#NFB  
Table-Top Bases



#KFB  
Table-Top Bases



#NFIN  
Leveling Mount – Standard



#FJGM  
Adjustment Pads – Nonslip



#FJKN  
Adjustment Pads – Fixed



#FJWN  
Adjustment Pads – Two Hole



#NFINC  
Adjustment Pads – Space Saving



#MAJB  
[Economy] Adjustment Pads



#FJF2  
Leveling Mount – Heavy Load



#FJKT  
[Economy] Fixing Plates for Adjustment Pads



#AJKN  
Mounting Plates for Adjustment Pads – Thick, Centered Groove



#FJKP  
Mounting Plates for Adjustment Pads



#FJTP  
Mounting Nuts for Adjustment Pads



#AJCP  
Protection Caps for Adjustment Pads



#HNFN  
Leveling Mount – Space Saving



#HNFR  
Leveling Mount – Rotary



#LEMS  
Adjuster Feet – Rotary



#FJRP  
Adjuster Feet – Rotary, Short





**#LEMN**  
Adjuster Feet – Tapped Socket



**#AJPD**  
Adjuster Feet – Resin Rubber



**#FJLM**  
Adjuster Feet – Rotary



**#FJSM**  
Rubber Base Adjustment Pads



**#NFBG**  
Tabletop Leveling Mounts – Grip



**#FJKB**  
Foot Jack Bolts – Radiused Tip, Square Head



**#FJKC**  
Foot Jack Bolts – Radiused Tip, Hex Head



**#FJKF**  
Foot Jack Bolts – Flanged, Radiused Tip



**#FJKM**  
Foot Jack Bolts – Spherical Tip



**#FJKR**  
Foot Jacks Tip Hexagon Chamfered



**#FJK2**  
Foot Jacks Tip Sphere Head Cap



**#FJKA**  
Foot Jacks Tip SR Head Cap



**#SEPF**  
Seating Plates



**#KHWM**  
Leveling Mounts

Angle Brackets



**#STYU**  
Angle Brackets – Press-Fit



**#STDR**  
Anchor Brackets



**#STRS**  
Anchor Brackets – Ribbed

Levers



**#CLDF**  
Clamp Levers – Threaded



**#CLCF**  
Clamp Levers – Stainless Steel, Threaded, Chrome Plated



**#CLCC**  
Miniature Clamp Levers – Threaded



**#CLDT**  
Flat Clamp Levers



**#CLDM**  
Y-Shaped Clamp Levers



**#CLDC**  
Double Arm Clamp Levers



**#CLDS**  
Clamp Levers – Threaded with Washer



**#CLDP**  
Push Button Clamp Levers



**#CLRM**  
Clamp Levers with Pad, Radiused Tip



**#CLNP**  
Resin Clamp Levers – Curved Handle



**#LNF**  
Resin Clamp Levers – Straight Handle



**#CLNC**  
Miniature Resin Clamp Levers



**#CLN2**  
Resin Clamp Levers with Push Button



**#CLN3**  
Safety Resin Clamp Levers



**#CLRA**  
Ratcheting Clamp Levers



**#CLCK**  
Cam Lever



**#LFTM**  
Flat Tension Levers



**#LFTR**  
with Hexagonal Socket Head – Threaded



**#ALDM**  
Tension Levers – Safety Tension Levers



**#LAG**  
Stationary Handles – Offset, Spherical Knob



**#CLR**  
Stationary Levers – Cost Efficient Product



**#CGM**  
Revolving Handles – Cost Efficient Product



**#CGRW**  
Revolving Handles with Hex Socket – Cost Efficient Product



**#CGB**  
Folding Handles – Cost Efficient Product



**#CPBG1**  
Revolving Ball Knobs – Cost Efficient Product



**#CLG**  
Cone Shaped Levers – Cost Efficient Product



**#LGB**  
Stationary Handles – Cylindrical Knob



**#BGW**  
Ball Knobs – Resin



**#GRAF**  
Stationary Handle



**#GRMS**  
Stationary/Revolving Handles – Stainless Steel



**#GRMK**  
Revolving Grips – Ergonomic



**#GRM**  
Revolving Grips – Hexagon Socket Head Cap Screw



**#GRC**  
Revolving Grips – Flat Head Screwdriver



**#GRW**  
Revolving Grips – Hexagonal Socket Head



**#GRMB**  
Revolving Handles – Folding



**#GRML**  
Revolving Handles – Folding



**#GRF**  
Revolving Handles – Short, Threaded



**#GRMM**  
Miniature Revolving Handle – Stainless Steel



**#PBG**  
Revolving Ball Knobs



**#CNO**  
Balance Handles – Cost Efficient Product



**#CMB**  
Revolving Crank Handles – Square/Round Bore, Cost Efficient Product



**#CPH**  
Handwheels – Spoked, Cost Efficient Product



**#CAH**  
Handwheels – Five Spoked, Cost Efficient Product



**#CAN**  
Handwheels – Spoked, No Handle, Cost Efficient Product



**#UPF1**  
Handwheels – Solid Disk, Cost Efficient Product



**#CPHS**  
Handwheels – Solid Disk, Retractable Handle, Cost Efficient Product



**#SSCH**  
Crank Handles – Square Hole, Ribbed



**#MBCH**  
Crank Handles – Square Hole



**#NOCH**  
Crank Handles



**#PHLK**  
Offset Handwheels – Three Spoked



**#AHSK**  
Offset Handwheels – Solid



**#SCOL**  
Collar with Scale



**#AHSL**  
Handwheels – Folding



**#AHNF**  
Handwheels – Flat



**#AHLN**  
Handwheels – Five Spoked



**#AHTN**  
Handwheels – Two Spoked,  
Stainless Steel



**#HBK**  
Knurled Handwheels – Aluminum

Knobs / Screws



**#NKB**  
Knurled Knobs – L Dimension  
Standard



**#NKBA**  
Knurled Knobs – Thick,  
L Dimension Standard



**#NKOT**  
Knurled Knobs with Washer



**#NKCR**  
Stepped Knob (not Knurled)



**#NKRD**  
Knurled Knobs – Large Diameter



**#NKBC**  
Knurled Knobs – Small Diameter



**#NKBR**  
Knurled Knobs – Hexagonal  
Socket Head



**#NKBX**  
Twill Knurled Knobs



**#NKBD**  
Knurled Knobs – Drop-Proof



**#NOOS**  
Knurled Knobs with Tip Pad



**#NKOS**  
Knurled Knobs – Socket Head  
Cap Screws



**#NOBW**  
Knurled Knobs – Flat Head  
Screwdriver



**#NRL**  
Knurled Knob Screws – Short



**#NRLS**  
Knurled Knob Screws – SR Tip



**#KNB**  
Knurled Clamp Knobs



**#NPFS**  
Stainless Steel Knobs – Round



**#NPFC**  
Stainless Steel Knobs – Wingnut



**#NPBF**  
Stainless Steel Knobs – Five Lobed



**#NBMS**  
Plastic Knurled Knobs with Pad



**#NBMP**  
Plastic Knurled Knobs



**#NAF**  
Plastic Clamp Knobs



**#NBF**  
Knurled Knobs – Straight Cut



**#NBFX**  
Knurled Knobs – Diamond Cut



**#NKRF**  
Knurled Knobs – Large Diameter





**#NMF**  
Plastic Knobs – Mushroom Shaped



**#NWGM**  
Plastic Knobs – Tab Shaped



**#NWGF**  
Plastic Knobs – Wingnut



**#NTM**  
Plastic Knobs – Three Lobed



**#NKPF**  
Plastic Knobs – Star



**#NCRF**  
Plastic Knobs – Cross



**#NPEF**  
Plastic Knobs – Five Lobed



**#NHF**  
Plastic Knobs – Six Lobed



**#NKSF**  
Plastic Knobs – Seven Lobed



**#SKN**  
Super Knobs



**#ASKN**  
Adjustment Screws with Knobs



**#PPKN**  
For Socket Head Cap Screws



**#DPCH**  
Drop-Prevention Chains for Knobs

Hanger Hooks



**#HHKJ**  
Hooks



**#HHKJ**  
Hooks

Pull Handles



**#UWAN**  
Handles – Standard Lengths



**#UWAF**  
Handles – L/H Dimensions Configurable



**#UWAC**  
Small Handles



**#UWAA**  
Mounting Plates for Handle – Round Handle



**#UWAZ**  
Round Handles with Washer – Tapped



**#UWAL**  
Round Handles With Rubber, Tapped



**#UZB**  
Washers for Handles



**#UHFN**  
Handles – Offset



**#UHF6**  
Handles – Small Diameter, Offset



**#UABL**  
Handles Tapped Oval Grip



**#USAN**  
Rectangular, Standard Lengths



**#USAK**  
[Tapped] Square Handles U-Shaped



**#USAF**  
Rectangular, Configurable Lengths



**#UWSY**  
Designer Handles, Tapped



**#UPCF**  
Handles – Phenol



**#UPFN**  
Handles – Nylon



**#HHD4**  
Pull Handles for Panels



**#UGFN**  
Handles – Rubber



**#TSPF**  
T-Shaped Handles



**#UWAS**  
Round Bar Grip Handles



**#UWAG**  
Handles with Mounting Plates



**#USAS**  
Handles - Welded Rectangular Bar



**#UADL**  
Handles - Oval, Standard Lengths



**#HHD2**  
Aluminum Pull Handles



**#UWDS**  
Handles - Bent Sheet Metal



**#UWA5**  
Handles - U-Shaped, Bent Sheet Metal



**#UWSD**  
Arched Pull Handles



**#UWA2**  
Cast Handles - Stainless Steel



**#UWAD**  
Handles - Stainless Steel Cast



**#UWFA**  
Handles - Folding



**#HHD3**  
Handles with Cap



**#UWAP**  
Aluminum Tube Pull Handles



**#UWA6**  
Aluminum Pipe Handles - Small Diameter



**#UHFS**  
Round Bar Grip Handles Offset



**#UHf4**  
Handles with Plate Offset



**#UHFG**  
Handles with Plate Offset



**#HHDN**  
Handles - Angled



**#UWA4**  
Handles - Cast, Offset



**#UHFA**  
Offset Pull Handles with Mounting Plates - Aluminum Tube



**#UHFC**  
Aluminum Pipe Handles - Small Diameter, Offset



**#UPC4**  
Nylon Handles - Small



**#UPCN**  
Nylon Handles



**#UPC3**  
Mounting Plates for Handle - Nylon Handle



**#UPCA**  
Handles - Phenol, Counterbored



**#HHKA**  
Cantilever Handles - Aluminum



**#UPCD**  
Resin Handles with Cap



**#HHPW**  
Nuts for Pull Handles



**#UWA7**  
Folding Handles



**#UWAM**  
Handles - Threaded



**#UWAY**  
Handles - Side Mount



**#TSPM**  
T-Shaped Handles - Threaded



**#UWAW**  
Handles for Welding



**#UWUS**  
Folding Handles with Spring





#UWAK  
Rotary Handles



#UWUA  
Embedded Handles – Stainless Steel



#UWUN  
Embedded Handles – Offset



#UWAU  
Embedded Handles



#UWUF  
Folding Embedded Handles



#UWAB  
TPE Embedded Pull Handles



#UWAJ  
Embedded Pull Handles

Hinges



#HHP5  
Nut for Pull Handles with Caps



#SHHP  
Steel Hinges – Round Hole



#SHSD  
Stainless Steel Hinges – Countersunk Hole



#HHS  
Butt Hinges – Stainless Steel



#HHSK  
Butt Hinges – Stainless Steel, Long



#HHST  
Hinge Nuts



#8F  
Aluminum Hinges



#8NT  
Aluminum Hinges – Extra Low Head Cap Screws



#HHP2  
Hinge Nuts



#8NC  
Aluminum Hinges – Short



#8NL  
Aluminum Hinges – Long



#8DT  
Aluminum Hinges with Tabs



#HHPL  
Flag Hinges



#8NH  
Stop Hinges



#HHSZ  
Hinges for Heavy Load – Stainless Steel



#SHPS  
Hinges – Slotted Hole, Stainless Steel



#8NA  
Hinges – Slotted Hole, Aluminum



#8J  
Plastic Hinges



#8JC  
Plastic Hinges – Compact



#HHPG  
Low Particulate Generation Hinges – Aluminum



#HHSO  
Hinges – Offset Mounting Holes



#8SD  
Stepped Hinges – Stainless Steel



#HHSD  
Stepped Hinges



#HHSP  
Spring Hinges



**#HHP3**  
Torque Hinges – Fixed Torque



**#HHP4**  
Torque Hinges – Adjustable Torque



**#HHPR**  
Damper Hinges



**#MSDH**  
Hinge Dampers



**#SHSL**  
Detachable Hinges – Stainless Steel



**#HNS2**  
Detachable Hinges – Stainless Steel



**#HHP1**  
Detachable Hinges – Aluminum



**#HHPK**  
Detachable Hinges



**#HNZL**  
Detachable Hinges for Heavy Load



**#HHS2**  
Detachable Hinges with Steps



**#HHSV**  
Detachable Hinges – Vertical



**#HHSM**  
Welded Detachable Hinges



**#HHS1**  
Welded Detachable Hinges



**#HHSY**  
Hinges for Welding



**#HHS3**  
Hinges for Welding



**#HHS4**  
Hinges for Welding – Heavy Load



**#HHSL**  
Stainless Steel Hinges – Long

**Catches**



**#MGCE**  
Magnet Catches with Ferrite Magnet



**#MGCB**  
Magnet Catches – Horizontal with Ferrite Magnet



**#MGCP**  
Magnet Catches with Neodymium Magnet



**#MGCS**  
Magnet Catches – Strong



**#MG CJ**  
Magnet Catches – Selectable Force



**#HMET**  
Magnet Catches – Stainless Steel Body



**#HMEP**  
Magnetic Catches for Panels



**#MGCU**  
Thin Magnet Catches



**#MGCM**  
Ultrathin Magnetic Catches



**#AMGC**  
Magnet Catches – Adjustable



**#MGCC**  
Dust-Proof Magnet Catches



**#MGC1**  
Dust-Proof Magnet Catches – Thin



**#JMCG**  
Resin Catches



**#MGSR**  
Magnet Catches with Sensor – Two Lead Wires



**#MGSK**  
Magnet Catches with Switch



**#BCAS**  
Ball Catches





**Fasteners / Draw Latches**



**#PKBS**  
Snap Locks with Springs



**#PKWS**  
Snap Locks



**#PKCS**  
Covered Snap Locks



**#PKWA**  
Stainless Steel Draw Latches – Medium Load

NEW



**#PKWZ**  
Snap Locks – Medium Load



**#PKWJ**  
Snap Locks – Adjustable



**#PKBK**  
Corner Snap Locks with Springs

**Latch Handles / Locks / Keys**



**#CPC**  
Plastic Small Handwheels – Cost Efficient Product



**#CCH**  
Knurled Plastic Handwheels – Cost Efficient Product



**#CHBK**  
Knurled Handwheels – Plastic



**#HHMU**  
Slide Locks – Large Cabinet



**#LOCN**  
Key Locks



**#LCL**  
Rotating Latches

NEW



**#LCAL**  
Airtight Latches



**#HHMT**  
Latch – Sliding Bolt



**#HHMS**  
Latch – Sliding Bolt, Square

**Door Stays**



**#STYF**  
Stays



**#STYT**  
Canopy Stays



**#STYM**  
Small Canopy Latches



**#STYC**  
Stays with Catch Mechanism




**#STYR**  
Rotary Latches



**#STYP**  
Spring Stays

**Manifolds**



**#BTS**  
Terminal Blocks – Hydraulic, Outlets 2 Sides, No Inlets, Horizontal Mounting




**#BTLN**  
Terminal Blocks – Hydraulic/Pneumatic, Outlets 2 Sides, No Inlets, Vertical/Horizontal Mounting



**#BTLA**  
Terminal Blocks – Pneumatic, Outlets 2 Sides, No Inlets, Vertical/Horizontal Mounting



**#BTLL**  
Terminal Blocks – Hydraulic, Outlets 2 Sides, No Inlets, Vertical/Horizontal Mounting



**#BTAN**  
Terminal Blocks – Hydraulic/Pneumatic, Outlets 2 Sides, No Inlets, Horizontal Mounting




**#BTA**  
Terminal Blocks – Pneumatic, Outlets 2 Sides, No Inlets, Horizontal Mounting



**#BTAN**  
Terminal Blocks – Hydraulic/Pneumatic, Outlets 2 Sides, No Inlets, Horizontal Mounting



**#BTAN**  
Terminal Blocks – Hydraulic/Pneumatic, Outlets 2 Sides, No Inlets, Horizontal Mounting



**Inlets – 0**  
**Outlets – Top & 2 Sides**



**#BMAN**  
Manifold Blocks – Hydraulic/  
Pneumatic, Outlets 3 Sides, No  
Inlets, Vertical/Horizontal Mounting




**#BMAF**  
Manifold Blocks – Hydraulic,  
Outlets 3 Sides, No Inlets,  
Vertical/Horizontal Mounting



**#BMGF**  
Manifold Blocks – Pneumatic,  
Outlets 3 Sides, No Inlets,  
Vertical/Horizontal Mounting




**#BMAH**  
Manifold Blocks – Hydraulic,  
High Pressure, Space Saving,  
Outlets on 3 Sides



**Inlets – 1 Blind**  
**Outlets – Top**




**#BMZF**  
Manifold Blocks – Hydraulic/  
Pneumatic, Outlets 1 Side, 1 Inlet,  
Vertical Mounting



**Inlets – 1 Blind**  
**Outlets – Side; Top & Side**


**#BMZR**  
Manifold Blocks – Hydraulic/  
Pneumatic, Outlets 1 Side/2 Sides,  
1 Inlet, Vertical/Horizontal Mount



**Inlets – 2 Blind**  
**Outlets – Top**




**#WBMB**  
Manifold Blocks – Hydraulic/  
Pneumatic, Two Circuit,  
Vertical Mounting



**Inlets – 2 Blind**  
**Outlets – Side**


**#WBMR**  
Manifold Blocks – Hydraulic/  
Pneumatic, Two Circuit,  
Horizontal Mounting



**Inlets – 2 Blind**  
**Outlets – Top & Side**



**#WBMU**  
Manifold Blocks – Hydraulic/  
Pneumatic, Outlets 2 Sides



**Inlets – Thru**  
**Outlets – Top**

**#BMBN**  
Manifold Blocks – Hydraulic/  
Pneumatic, Outlets 1 Side, 2 Inlets,  
Vertical Mounting




**#BMSLN**  
Manifold Blocks – Pneumatic –  
Outlets on 2 Sides, Horizontal/  
Outlets on 1 Side, Vertical, 2 Inlets



**#BMBF**  
Manifold Blocks – Hydraulic,  
Outlets 1 Side, 2 Inlets,  
Vertical Mounting



**#BMSF**  
Manifold Blocks – Pneumatic,  
Outlets 1 Side, 2 Inlets,  
Vertical Mounting



**Inlets – Thru**  
**Outlets – 1 Side**

**#BMRN**  
Manifold Blocks – Hydraulic,  
Outlets 1 Side, 2 Inlets,  
Horizontal Mounting




**#BMRF**  
Manifold Blocks – Hydraulic,  
Outlets 1 Side, 2 Inlets,  
Horizontal Mounting



**#BMRA**  
Manifold Blocks – Pneumatic,  
Outlets 1 Side, 2 Inlets,  
Horizontal Mounting



**#SBMA**  
Manifold Block – Pneumatic,  
Space Saving, 10 x 15, 2 Inlets




**Inlets – Thru**  
**Outlets – 2 Sides**

**#BMIF**  
Manifold Blocks – Hydraulic/  
Pneumatic, Outlets 3 Sides, 2  
Inlets, Vertical/Horizontal Mounting



**#BTAW**  
Manifold Blocks – Pneumatic,  
Double Row, Outlets on 2 Sides,  
No Inlets, Horizontal Mounting



**Inlets – Thru**  
**Outlets – Top & 2 Sides**

**#BMTF**  
Manifold Blocks – Hydraulic,  
Outlets on 3 Sides, 2 Inlets,  
Vertical/Horizontal Mounting



**#BMFR**  
Manifold Blocks – Hydraulic/  
Pneumatic, Outlets 3 Sides, 2  
Inlets, Vertical/Horizontal Mounting



**Inlets – Thru**  
**Outlets – Top & Side**

**#BMUN**  
Manifold Blocks – Pneumatic,  
Outlets 2 Sides, 2 Inlets,  
Vertical/Horizontal Mounting






**#BMUF**  
Manifold Blocks – Hydraulic,  
Outlets 2 Sides, 2 Inlets,  
Vertical/Horizontal Mounting




**#BMUA**  
Manifold Blocks – Pneumatic,  
Outlets 2 Sides, 2 Inlets,  
Vertical/Horizontal Mounting



Multi-line Inlets – Thru  
Outlets – Top



**#BMSW**  
Hydraulic/Pneumatic Manifold  
Blocks – 2 Pos, Lateral Through  
Hole/Upper Hole, BMBW Series



Multi-line Inlets – Thru  
Outlets – Top & 2 Sides



**#BMUW**  
Manifold Blocks – Pneumatic,  
Double Row, Outlets 2 Sides,  
Vertical/Horizontal Mounting



**#PMF**  
Pipe Manifolds – Outlets,  
1 Row/2 Rows, 2 Inlets



**#SGFF**  
Pipe Manifolds – Threaded/Tapped  
Sockets, Outlets 1 Row, 2 Inlets



**#SGMH**  
Pipe Manifolds – Threaded Sockets,  
Outlets 1 Row, 2 Inlets



**#SGSM**  
Sockets for Pipe Manifolds –  
Threaded



**#SGSK**  
Sockets for Pipe Manifolds –  
Tapped



**#SGM**  
Pipe Manifolds – Tapped Sockets,  
Outlets 1 Row, 2 Inlets



**#SGML**  
Pipe Manifolds – Threaded/Tapped  
Sockets, Outlets 2 Rows 90 Deg,  
2 Inlets



**#SSKK**  
Sockets for Pipe Manifolds –  
Tapped, 90 Deg Dedicated Sockets



**#SGMM**  
Pipe Manifolds – Tapped Sockets,  
Outlets 2 Rows 180 Deg, 2 Inlets



**#BMRV**  
Rotary Manifolds – Economy



**#BMRT**  
Rotary Manifolds – Manifold  
Blocks



**#TGPL**  
Manifold Block Items – Plates with  
Tapped Socket Fittings



**#TGMF**  
Manifold Blocks – Simplified  
Manifolds



**#TGLB**  
Manifold Block Items – Brackets  
with Tapped Socket Fittings



**#TGLC**  
Manifold Block Items – Brackets  
with One-Touch Coupling Fittings



**#HFMB**  
Manifold Blocks – Aluminum  
Frame Manifolds, Outlets  
Configurable, 2 Inlets



**#MGM**  
Manifold Blocks – with Magnets

Steel / Copper /  
Stainless Steel  
Pipes



**#SGGA**  
Steel Pipes – Plain, Metric Thread



**#SSGG**  
Steel Pipe Fittings – Plain, Metric  
Thread, Wrench Flat



**#HKCP**  
Steel Pipe Covers – Heat/Cold  
Retention



**#HKCV**  
Elbow-Heat and Cold Retention Pipe  
Cover



**#HKTP**  
Tape for Pipe Covers



**#PVCH**  
PVC Pipes



**#DKE**  
Copper Pipes



**#DKEN**  
Annealed Copper Pipes



**#SKE**  
Stainless Steel Pipes



**Screw Fittings**



**#OST**  
Steel Pipes for Hydraulic Piping



**#SPPS**  
Low Pressure Fittings – Socket



**#SGPR**  
Low Pressure Fittings – Socket, Parallel Tapped



**#SUTP**  
Low Pressure Fittings – Long Socket



**#SGPH**  
Low Pressure Fittings – 45 Deg. Elbow



**#SPPC**  
Low Pressure Fittings – Cap



**#SPPP**  
Low Pressure Fittings – Plug



**#SGPN**  
Low Pressure Fittings – Nipple



**#SGP4**  
Low Pressure Fittings – Long Nipples



**#SPPE**  
Low Pressure Fittings – 90 Deg. Elbow



**#SPEL**  
Low Pressure Fittings – 90 Deg. Elbow, Threaded and Tapped



**#SPPT**  
Low Pressure Fittings – Tee



**#SGP5**  
Low Pressure Fittings – Nipple, Hexagon



**#SGPU**  
Low Pressure Fittings – Union



**#SGPC**  
Low Pressure Fittings – Cross



**#SGPF**  
Low Pressure Fittings – Flange, Tapped



**#SGST**  
Low Pressure Fittings – 3 Port Elbow



**#SPPB**  
Low Pressure Fittings – Reducer Bushing



**#STUN**  
Low Pressure Fittings – Reducer Nipple



**#SGPE**  
Low Pressure Fittings – Reducer, 90 Deg. Elbow



**#SGPD**  
Low Pressure Fittings – Reducer Tee



**#SGPS**  
Low Pressure Fittings – Reducer Socket



**#SPSH**  
High Pressure Pipe Fittings – Socket



**#SGSH**  
High Pressure Pipe Fittings – Socket, Hexagon



**#SPEH**  
High Pressure Pipe Fittings – 90 Deg. Elbow



**#SGP2**  
High Pressure Pipe Fittings – 45 Deg. Elbow



**#SGP1**  
High Pressure Pipe Fittings – 90 Deg. Elbow, Tapped and Threaded



**#SPHT**  
High Pressure Pipe Fittings – Tee



**#SPPJ**  
High Pressure Pipe Fittings – Plugs



**#SGP3**  
High Pressure Pipe Fittings – Nipple



**#SPUJ**  
High Pressure Pipe Fittings – Union with O-Ring



**#SGDJ**  
High Pressure Pipe Fittings – Reducing Socket



**#SGPJ**  
High Pressure Pipe Fittings – Reducing Nipple



**#SGPT**  
High Pressure Pipe Fittings – Reducing Tee





**#SPBJ**  
High Pressure Pipe Fittings – Reducer Bushing



**#SJS1**  
Brass Fittings for Steel Pipe – Socket



**#SJS5**  
Brass Fittings for Steel Pipe – Socket, Threaded, Tapped



**#SJSR**  
Brass Fittings for Steel Pipe – Nipple



**#SJSC**  
Brass Fittings for Steel Pipe – Caps



**#SJSX**  
Brass Fittings – 90 Deg. Elbow, Threaded, Tapped



**#SJSF**  
Brass Fittings for Steel Pipe – 90 Deg. Elbow



**#SJSL**  
Brass Fittings for Steel Pipe – 90 Deg. Elbow, Threaded



**#SJS3**  
Brass Fittings for Steel Pipe – Tee



**#SJSM**  
Brass Fittings for Steel Pipe – Tee, Threaded



**#SJST**  
Brass Fittings for Steel Pipe – Tee, Threaded, Tapped



**#SJSG**  
Brass Fittings for Steel Pipe – Plug



**#SJS2**  
Brass Fittings for Steel Pipe – Reducer Socket



**#SJSD**  
Reducer Socket – Threaded, Tapped



**#SJSN**  
Brass Fittings for Steel Pipe – Reducer Nipple



**#SJSJP**  
Brass Fittings for Steel Pipe – Reducer Bushing



**#SGCE**  
Low Pressure Fittings – Seal Coating, 90 Deg. Elbow, Threaded and Tapped



**#SGCP**  
Low Pressure Fittings – Seal Coating, Plug



**#SGCN**  
Low Pressure Fittings – Seal Coating, Nipple



**#SGCR**  
Low Pressure Fittings – Seal Coating, Hexagon Nipple



**#SGC1**  
Low Pressure Fittings – Seal Coating, Bushing



**#APBL**  
Conversion Pipe Fittings – L-Shape, T-Shape



**#APMF**  
Extension Couplings – Length Configurable



**#EXFG**  
Extension Couplings – Length Selectable



**#WEJE**  
Butt-Weld Pipe Fittings – 90 Deg. Elbow, Short



**#WEJL**  
Butt-Weld Pipe Fittings – 90 Deg. Elbow, Long



**#WEJT**  
Butt-Weld Pipe Fittings – Tees



**#WEJC**  
Butt-Weld Pipe Fittings – Cap



**#SGPW**  
Low Pressure Fittings – Flange for Welding



**#SGPB**  
Low Pressure Fittings – Blind Flange for Welding



**#PVC1**  
PVC Pipe Fittings – TS Fittings, Socket



**#PVC2**  
PVC Pipe Fittings – TS Fittings, Socket for Valve



**#PVC3**  
PVC Pipe Fittings – TS Fittings, Reducing Socket



**#PVC4**  
PVC Pipe Fittings – TS Fittings, Tees



**#PVC5**  
PVC Pipe Fittings – Reducing Tee



**#PVCE**  
PVC Pipe Fittings – H1 Fittings, 90 Deg. Elbow



**#PVC1**  
PVC Fittings – H1 Fittings, 45 Deg. Elbow



**#PVCC**  
PVC Pipe Fittings – TS Fittings, Cap



**#PVCY**  
PVC Pipe Fittings – TS Fittings, Elastic Joint



**#PVCT**  
PVC Pipe Fittings – TS Fittings, Ball Valve



**#PVCB**  
PVC Pipe Fittings – TS Fittings, Adhesive



**#MCWA**  
Piping Clamps – Weld Adapter



**#BTLF**  
Piping Terminals – Flanged



**#BTLH**  
Piping Terminals – Hexagon



**#BTLR**  
Piping Terminals – Full Thread



**#MSWT**  
Tapered Screw Plugs



**#DKPT**  
Copper Pipe Fittings – Union, Threaded End, Selectable Thread



**#DKLP**  
Copper Pipe Fittings – 90 Deg. Elbow, Threaded



**#DKUS**  
Copper Pipe Fittings – Union



**#DKUE**  
Copper Pipe Fittings – 90 Deg. Union Elbow



**#DKUT**  
Copper Pipe Fittings – Union Tee



**#DKUP**  
Copper Pipe Fittings – Union Tee, Threaded Branch



**#DKRG**  
Copper Pipe Fittings – Gland Ring



**#DKPR**  
Copper Pipe Fittings – Pin-Ring Joint



**#DKFR**  
Copper Pipe Fittings – Union, Tapped End



**#DKPG**  
Copper Pipe Fittings – Union, Threaded End



**#DKRN**  
Copper Pipe Fittings – Ring Nut



**#DKRK**  
Copper Pipe Fittings – Lock Nut



**#DKVB**  
Needle Valve – Union End Connectors



**#DKNT**  
Fittings for Annealed Copper Pipes – Union, Threaded End



**#SKNL**  
Fittings for Annealed Copper Pipe Fittings – 90 Deg. Elbow



**#DKFG**  
Fittings for Annealed Copper Pipes – Tapped Connector (G Thread)



**#SKTG**  
Stainless Steel Pipe Fittings – Threaded Union



**#SKTL**  
Stainless Steel Pipe Fittings – 90 Deg. Elbow, Threaded End, Union



**#SKUS**  
Stainless Steel Pipe Fittings – Union



**#SKUE**  
Stainless Steel Pipe Fittings – 90 Deg. Union Elbow



**#SKU1**  
Stainless Steel Pipe Fittings – Stepped Union



**#SKUT**  
Stainless Steel Pipe Fittings – T Union



**#SKPC**  
Stainless Steel Pipe Fittings – Port Connector



**#SKIT**  
Stainless Steel Pipe Fittings – Tube Insert



**#SKUF**  
Stainless Steel Pipe Fittings – Tapped Union



**#SKMA**  
Stainless Steel Pipe Fittings – Threaded Adapter



**#SKU2**  
Stainless Steel Pipe Fittings – T Union, Threaded Branch



**#SKUW**  
Stainless Steel Pipe Fittings – Union for Partition



**#SKPG**  
Stainless Steel Pipe Fittings – Plug



**#SKFP**  
Stainless Steel Pipe Fittings – Ferrule Pack



**#KTGS**  
Bite Hydraulic Pipe Fittings – Connectors, Threaded



**#KTGE**  
Bite Hydraulic Pipe Fittings – Elbow, Threaded



**#KTGR**  
Bite Hydraulic Pipe Fittings – Unions



**#KTGL**  
Bite Hydraulic Pipe Fittings – Elbow



**#KTGT**  
Bite Hydraulic Pipe Fittings – Tees



**#KTG1**  
Bite Hydraulic Pipe Fittings – Reducer



**#KTG3**  
Bite Hydraulic Pipe Fittings – Check Union



**#KTGZ**  
Bite Hydraulic Pipe Fittings – Check Connector



**#KTG2**  
Bite Hydraulic Pipe Fittings – Sleeve



**#KTGN**  
Bite Hydraulic Pipe Fittings – Nuts



**#HOSN**  
Fittings for Hoses – Nipples, Threaded, Barbed



**#HOSF**  
Fittings for Hoses – Nipples, Tapped, Barbed



**#HOS5**  
Fittings for Hoses – Bamboo Shoot Joints



**#HOS6**  
Fittings for Hoses – Nipples, Threaded, Barbed



**#HOS8**  
Fittings for Hoses – Open-Ended Hose Joint



**#HOS2**  
Fittings for Hoses – Bamboo Shoot Joints



**#HOS3**  
Fittings for Hoses – Fitting Sleeve Nut for Hose



**#HOSJ**  
Fittings for Hoses – 90 Deg. Elbow, Threaded, Barbed



**#HOS4**  
Fittings for Hoses – 45 Deg. Elbow, Threaded, Barbed



**#HOST**  
Fittings for Hoses – Tee, Threaded, Barbed



**#TCBM**  
Fittings for Hoses – General Purpose

NEW



**#SNAM**  
Arm Lock Coupling – Male Thread Adapter



**#SNAF**  
Arm Lock Coupling – Female Thread Adapter



**#SNAH**  
Arm Locking Couplers – Hose Mounting Adapters



**#SNAJ**  
Arm Locking Couplers – Threaded Sockets



**#SNA2**  
Arm Locking Couplers – Tapped Sockets



**#SNA1**  
Arm Locking Couplers – Hose Mounting Sockets



**#SAA**  
Thread Conversion Adapters



**Couplers /  
One-Touch  
Couplings**



**#QGSW**  
One-Touch Articulated Connector – Male/Female Set



**#JCPS**  
One-Touch Articulated Connector – Connector, Socket



**#JCPP**  
One-Touch Articulated Connector – Connector, Threaded



**#MCPG**  
Air Couplers Standard – Straight Plug



**#MCPL**  
One-Touch Connector – Plug, 90 Deg. Elbow



**#MCSC**  
Air Couplers Standard – One-Touch Coupling, Socket



**#MCS1**  
One-Touch Connector – 90 Deg. Elbow, Socket



**#MCSB**  
One-Touch Connector – Socket, Panel Mount



**#MCPM**  
Air Couplers – Standard, Plug, Threaded



**#MCPF**  
Air Couplers – Standard, Plug, Tapped



**#MCPH**  
Standard – Plug, Tube Connecting



**#MCPN**  
Standard – Plug, Nut Tightening



**#MCP8**  
Air Couplers – Manifold, Swivel, 2 Sockets, 1 Plug



**#MCP3**  
Air Couplers – Rotary, Plug, Threaded



**#MCPR**  
Air Couplers – Rotary, Plug, Tapped



**#MCSM**  
Air Couplers – Standard, Socket, Threaded



**#MCSF**  
Air Couplers – Standard, Socket, Tapped



**#MCSH**  
Standard – Socket, Tube Connecting



**#MCSN**  
Standard – Socket, Nut Tightening



**#MCS8**  
Air Couplers – Manifold, 4 Socket Outlets, 1 Socket Inlet, 1 Plug Inlet



**#MCS4**  
Air Couplers Standard – Tube Connecting Sockets with Lock Mechanism



**#MCS5**  
Air Couplers – Locking, Socket, Threaded



**#MCST**  
Air Couplers – Locking, Socket, Tapped



**#KSCM**  
Air Couplers – Lightweight, Plug, Threaded



**#KSCP**  
Air Couplers – Lightweight, Plug, Tapped



**#KSCH**  
Air Couplers – Lightweight, Plug, Tube Connector



**#KSCN**  
Air Couplers – Lightweight, Plug, Urethane Hose Mounting



**#KSC2**  
Air Couplers – Lightweight, Socket, Threaded



**#KSCS**  
Air Couplers – Lightweight, Socket, Tapped



**#KSC1**  
Air Couplers – Lightweight, Socket, Tube Connector



**#KSC3**  
Air Couplers – Lightweight, Socket, Urethane Hose Mounting



**#MCRN**  
Air Couplers – Manifold, 2 Socket, 1 Plug



**#MCRT**  
Air Couplers – Manifold, 4 Socket Outlets, 1 Socket Inlet, 1 Plug Inlet



**#MCLT**  
Air Couplers – Manifold, Swivel, 2 Sockets, 1 Plug



**#MCRE**  
Air Couplers – Manifold, Swivel,  
3 Sockets, 1 Plug



**#NMCM**  
Air Couplers – Miniature, Plug,  
Threaded



**#NMCP**  
Air Couplers – Miniature, Plug,  
Tapped



**#NMCH**  
Air Couplers – Miniature, Plug,  
Tube Connector



**#NMCL**  
Air Couplers – Miniature, Plug,  
L-Shape Tube Connector



**#NMC2**  
Air Couplers – Miniature, Socket,  
Threaded



**#NMCM**  
Air Couplers – Miniature, Socket,  
Panel Mounting Tube Connector



**#NMCS**  
Air Couplers – Miniature, Socket,  
Tube Connector



**#NMC1**  
Air Couplers – Miniature, Socket,  
L-Shaped Tube Connector



**#MCP2**  
Air Couplers – Chemical Resistant,  
Plug, Threaded



**#MCP3**  
Air Couplers – Chemical Resistant,  
Plug, Tapped



**#MCP1**  
Air Couplers – Chemical Resistant,  
Plug, Tube Connection



**#MCS3**  
Air Couplers – Chemical Resistant,  
Socket, Threaded



**#MCS2**  
Air Couplers – Chemical Resistant,  
Socket, Tube Connector



**#QNPf**  
Quick Couplings – Plug, Tapped,  
No Valve



**#QNSf**  
Quick Couplings – Socket, Tapped,  
No Valve



**#QNPm**  
Quick Couplings – Plug, Threaded,  
No Valve



**#QNSm**  
Quick Couplings – Socket,  
Threaded, No Valve



**#QNPm**  
Quick Couplings – Plug, Hose Barb,  
No Valve



**#QNSh**  
Quick Couplings – Socket, Hose  
Barb, No Valve



**#QBPF**  
Quick Couplings – Plug,  
Tapped, Valve



**#QBSf**  
Quick Couplings – Socket,  
Tapped, Valve



**#QBPH**  
Quick Couplings – Plug, Tapped,  
High Pressure Valve (210 Type)




**#QBSH**  
Quick Couplings – Socket, Tapped,  
High Pressure Valve (210 Type)



**#QBPP**  
Quick Couplings – Plug, Tapped, High  
Pressure Valve (350 Type)



**#QBSp**  
Quick Couplings – Socket, Tapped,  
High Pressure Valve (350 Type)



**#BSFF**  
Ball Valves – Stainless Steel,  
PT Male, PT Female



**#BRTW**  
Ball Valves – Stainless Steel, High  
Flow Rate, PT Female, PT Female



**#BSRC**  
Ball Valves – Stainless Steel,  
PT Female, PT Female



**#BSGF**  
Ball Valves – Stainless Steel,  
PT Female, PF(G) Female



**#BFRB**  
Sanitary Flanged Ball Valve



**#GBUC**  
Globe Valves



**#THKB**  
Check Valves



**#STRY**  
Strainers



**#BCKB**  
Check Valve – Oil Hydraulic



**#BBPF**  
Compact Ball Valves – Brass,  
PT Threaded, PF Threaded



**#BBPT**  
Compact Ball Valves – Brass,  
PT Threaded, PF Threaded



**#BBPW**  
Compact Ball Valves – Brass,  
PT Tapped, PF Tapped



**#BBFF**  
Compact Ball Valves – Brass,  
PT Tapped, PF Tapped



**#BBPH**  
Compact Ball Valves – Brass,  
PT Threaded, Hose Barb



**#BBPC**  
Compact Ball Valves – Brass,  
PT Threaded, Tube Connection



**#BBPJ**  
Compact Ball Valves – Brass,  
PT Threaded, Hose Connection



**#BBPP**  
Compact Ball Valves – Brass,  
PT Threaded, Peacock



**#BBPK**  
Compact Ball Valves – Brass,  
PF Tapped, PF Tapped



**#BBRF**  
Compact Ball Valves – Brass,  
PT Tapped, PT Tapped



**#BBRP**  
Compact Ball Valves – Brass,  
PT Threaded, PT Tapped



**#BBRT**  
Compact Ball Valves – Brass,  
PT Threaded, PT Threaded



**#BBPL**  
Compact Ball Valves – Brass,  
90 Deg. Elbow, PT Threaded,  
PF Tapped



**#BBP4**  
Compact Ball Valves – Brass, 90 Deg.  
Elbow, PT Threaded, Tube Connection



**#BBPR**  
Compact Ball Valves – Brass, Rotary  
Nut, PT Threaded, PF Tapped



**#BBP5**  
Compact Ball Valves – Brass,  
Rotary Nut, PT Threaded, Tube  
Connection



**#BBP2**  
Compact Ball Valves – 90 Deg.  
Rotary Elbow, PT Threaded,  
PF Tapped



**#BBPS**  
Compact Ball Valves – Stainless  
Steel, PT Male, PT Male



**#BBRC**  
Compact Ball Valves – Stainless  
Steel, PT Male, PT Female



**#BBCC**  
Compact Ball Valves – Stainless  
Steel, PT Female, PT Female



**#BBHR**  
Compact Ball Valves – Stainless  
Steel, PT Male, Hose Barb



**#BBKB**  
Compact Ball Valves – Brass,  
Knurled, PT Threaded, Coupler  
Socket



**#BBP3**  
Compact Ball Valves – Brass,  
Knurled, PT Male, PF Female



**#BBFS**  
Compact Ball Valves – Brass,  
Knurled, PT Female, PF Female



**#NSB1**  
Needle Valve – PT Male, Threaded,  
Stainless Steel



**#NSBP**  
Needle Valve – PT Male, Tapped,  
Stainless Steel



**#NSBC**  
Needle Valve – PT Female,  
Tapped, Stainless Steel



**#NSBH**  
Needle Valve – PT Male and Barb,  
Stainless Steel



**#NBPP**  
Needle Valve – PT Male Threads



**#NBPC**  
Needle Valve – PT Female,  
Male Threads



**#NBCC**  
Needle Valve – PT Female Threads



**#NBP1**  
Needle Valve – PT Male Threads,  
Stainless Steel



**#NBPS**  
Needle Valve – PT Male Threads,  
Stainless Steel



**#NBSC**  
Needle Valve – PT Female Treads,  
Stainless Steel



Pipe Supports



**#SGPL**  
Steel Pipe Fittings – L-Shaped Angle Brackets, Single, Double Slot



**#KBND**  
Pipe Supports – Vertical Pipe Bands



**#HGA**  
Pipe Supports – Paddle Shaped Legs



**#TGA**  
Pipe Supports – T-Shaped Leg



**#KSDL**  
Pipe Supports – Single, Double Saddle Bands



**#UB**  
Steel Pipes Items – U Bolts



**#MTC**  
Piping Clamps – Multi-Port



**#MCBM**  
Piping Clamps – Rubber Bushing



**#MCMA**  
Piping Clamps – Mounting Adapter



**#MCKB**  
Piping Clamps – Coupling Bolt

Resins / Ducts / Flexible Hoses



**#SNHT**  
Silicon Hoses – Standard, Vacuum



**#HOJF**  
Fluororesin Hoses – High Flex



**#HOEF**  
Fluororesin Hoses – Conductive



**#HOTR**  
Resin Hoses for General Purposes – Standard



**#HOT1**  
Resin Hoses for General Purposes – Oil-Proof



**#HOTG**  
Resin Hoses for General Purposes – High Strength



**#HOTS**  
Resin Hoses for General Purposes – High Pressure



**#HOS1**  
Hose Bands – Standard



**#HOSS**  
Hose Bands – Spiral



**#HOSB**  
Hose Bands – Hand Tightening



**#HOAB**  
Hose Bands – Safety Lock, Cap

Duct Hoses / Duct Plumbing Components



**#HOSE**  
Duct Hoses – Lightweight



**#HOSK**  
Duct Hoses – Swivel



**#HOSH**  
Duct Hoses – Friction Resistant, Antistatic



**#HOSD**  
Duct Hoses – Oil-Resistant, No Cuff



**#HOSC**  
Duct Hoses – Oil-Resistant



**#DHED**  
Duct Hose Items – Cuffs



**#HOAD**  
Duct Hoses – Aluminum



**#HOFM**  
Duct Hose Mounting Flange



**#HOAE**  
Aluminum Duct Hose Items – 90 Deg. Elbow



**#HOAR**  
Aluminum Duct Hose Items – Duct Reducers



**#HOSY**  
Duct Hose Items – Hood Cover with Flange



Duct Hoses / Duct Plumbing Components



**#HOAN**  
Aluminum Duct Hose Items - Dampers



**#HOAM**  
Aluminum Duct Hose Items - Socket



**#HOBU**  
Aluminum Duct Hose Items - Panel Mounting Flanges



**#HOAT**  
Aluminum Duct Hose Items - Tee



**#HOAY**  
Aluminum Duct Hose Items - Y-Shaped



**#HOA1**  
Plumbing Parts for Aluminum Duct Hoses - Unequal Dia. Y-Shaped



**#HOAH**  
Aluminum Duct Hose Items - Variant Y-Shaped



**#HOAF**  
Plumbing Parts for Aluminum Duct Hoses - 45 Deg. Reducer



**#HOAJ**  
Aluminum Duct Hose Items - Flange



**#DBXT**  
Dust Boxes

Flexible Hoses

**Flexible Hoses**



**#HOSL**  
Flexible Hoses - High Pressure



**#HOEM**  
Flexible Hoses - Medium Pressure



**#HOEL**  
Flexible Hose - Low Pressure, Non-Welded



**#HOEJ**  
Flexible Hose - Low Pressure, Non-Welded

Hydraulic Valves



**#HOSR**  
Flexible Hoses - Fluoro Resin



**#HOS7**  
Flexible Hoses - Fluoro Resin, High Flex



**#HOFB**  
Tubes - Flexible Tube, Bellow Shape

**Hydraulic Valves**



**#BKFS**  
Inline Flow Control Valve - Oil Hydraulic

Hydraulic Hoses / Adaptors

**Hydraulic Hoses / Adaptors**



**#HOMC**  
Hydraulic Hoses - Rubber



**#HOKT**  
Hydraulic Hoses - Rubber, Quick Swaging



**#SJSA**  
Swivel Joints - 90 Deg. Elbow, PT Threaded, PT Tapped



**#KCLP**  
Swivel Joints - Straight, 90 Deg. Elbow, PT Threaded, PT, PF Tapped, Threaded



**#SKGR**  
Hydraulic Couplings - Swivel, Straight



**#YCP1**  
Hydraulic Fittings - Straight, Female, PT Threaded, PF Tapped



**#YCP2**  
Hydraulic Fittings - Straight, Male, PT Threaded, PF Threaded



**#YCP5**  
Hydraulic Fittings - Straight, Male, PT Threaded, PF Threaded



**#YCPG**  
Hydraulic Fittings - Straight, Male, PT Threaded, PF Tapped



**#YCP4**  
Hydraulic Fittings - Straight, Female, PT Threaded, PF Tapped



**#YCP1**  
Hydraulic Fittings - Straight, Female, PT Threaded, PF Tapped



**#YCP2**  
Hydraulic Fittings - Straight, Male, PT Threaded, PF Threaded



**#YCP5**  
Hydraulic Fittings - Long Straight, Female, PT Threaded, PF Threaded



**#YCP3**  
Hydraulic Fittings - Long Straight, Male, PT Threaded, PF Threaded





**#YCW F**  
Hydraulic Fittings – 45 Deg. Elbow,  
Female, PT Threaded, PF Threaded



**#YCW P**  
Hydraulic Fittings – 45 Deg. Elbow,  
Male, PT Threaded, PF Threaded



**#YCW T**  
Hydraulic Fittings – 45 Deg. Elbow,  
PT Threaded, PT Threaded



**#YCL 3**  
Hydraulic Fittings – 90 Deg. Elbow,  
PT Threaded, PT Threaded



**#YCL P**  
Hydraulic Fittings – 90 Deg. Elbow,  
Female, PT Threaded, PF Threaded



**#YCL 2**  
Hydraulic Fittings – 90 Deg. Elbow,  
Male, PT Threaded, PF Threaded



**#YCL 1**  
Hydraulic Fittings – 90 Deg. Elbow,  
PT Threaded, PF Tapped

**Sanitary Pipes**



**#SNPE**  
Sanitary Pipes – Standard



**#SNPW**  
Sanitary Pipes – Welded, Low Neck



**#SNL 1**  
Welded Sanitary Pipes – Standard,  
Ferrule x Ferrule



**#SNLP**  
Welded Sanitary Pipes – Standard,  
Ferrule x Pipe



**#SNLE**  
Welded Sanitary Pipes – Standard,  
Elbow x Pipe



**#SNLF**  
Welded Sanitary Pipes – Standard,  
Ferrule x 90 Deg. Elbow



**#SNLH**  
Welded Sanitary Pipes – Standard,  
Ferrule x 45 Deg. Elbow



**#SNPK**  
Sanitary Pipes – One Side Welded,  
Both Sides Welded



**#SNFR**  
Sanitary Pipe Fittings –  
Ferrule Connector



**#SNF 1**  
Sanitary Pipe Fittings – Ferrule,  
Unequal Diameter, Reducer



**#SNFK**  
Sanitary Pipe Fittings –  
Ferrule Cap



**#SNFE**  
Sanitary Pipe Fittings – Ferrule One  
End, Welded Elbow



**#SNFH**  
Sanitary Pipe Fittings –  
Ferrule x Welded



**#SNFD**  
Sanitary Pipe Fittings –  
Ferrule x Welded



**#SNFY**  
Sanitary Pipe Fittings –  
Ferrule x Welded



**#SNPA**  
Sanitary Pipes – Both Ends Ferrule  
Fixed Dimension



**#SNBE**  
Sanitary Pipe Fittings – Ferrule Both  
Ends, Elbow



**#SNBH**  
Sanitary Pipe Fittings – Double  
Ferrules, Clamp, Gasket



**#SNBT**  
Sanitary Pipe Fittings – Tees,  
Ferrule Ends



**#SNB 2**  
Sanitary Pipe Fittings – Double  
Ferrules, Reducing Tees



**#SNZP**  
Sanitary Pipe Fittings –  
Pipe Hanger



**#SNGS**  
Sanitary Pipe Fittings –  
Ferrule Gasket



**#SNCP**  
Ferrule Connector Clamp –  
Low Pressure



**#SNCH**  
Ferrule Connector Clamp –  
Medium, High Pressure



**#SNCW**  
Sanitary Pipe Fittings –  
One-Touch Clamp



**#SNZF**  
Sanitary Adapter Fittings – Ferrule  
End and Threaded End



**#SNHA**  
Sanitary Adapter Fittings – Hose,  
Ferrule



**#SNZS**  
Sanitary Adapter Fittings – Ferrule Tapped Socket Adapter



**NEW**

**#SNSU**  
Sanitary Adapter Fittings – Swaged Sleeve



**#SNZR**  
Sanitary Adapter Fittings – Flanged, Ferrule



**#SNZY**  
Sanitary Adapter Fittings – Flanged x Thread Sheet



**#SNWE**  
Sanitary Pipe Fittings – 90 Deg. Elbow, Double Weld



**#SNWH**  
Sanitary Pipe Fittings – Welded Thread, L-shaped Gasket



**#SNWT**  
Sanitary Pipe Fittings – Tees, Welded



**#SNWD**  
Sanitary Pipe Fittings – Both Ends Weld-On Reducing Tees



**#SNYB**  
Blind Nuts



**#SNYN**  
Sanitary Pipe Fittings – Threaded Connector



**#SNYR**  
Sanitary Pipe Fittings – Welding Liner



**#SNRN**  
Sanitary Pipe Fittings – Nut Connector



**#SNLG**  
Sanitary Pipe Fittings – Ferrule Gasket, L-Shaped



**#SNWZ**  
Conversion Fittings



**#SNWA**  
Sanitary Pipe Fittings – Ferrule Hose Adapter



**#SNGC**  
Sanitary Pipe Fittings – Cover Cap



**#SNGG**  
Sanitary Pipe Fittings – Gasket for Mounting Accessories



**#SNTS**  
Sanitary Tube Strainers – Standard



**#SNTL**  
Sanitary Tube Strainers – L-Shaped



**#BFBS**  
Sanitary Butterfly Valve



**#SNB1**  
Sanitary Ball Valves – Small Diameter



**#SNBS**  
Sanitary Ball Valves – Standard



**#SNSG**  
Sanitary Sight Glasses – In-Line



**#SNST**  
Sanitary Sightglasses – View Port



**#SNPR**  
Sanitary Pressure Gauge



**#SNSH**  
Sanitary Cleaning Ball



**Tanks**



**#TANA**  
Sanitary Items – Standard, Open-Top Tank



**#TANH**  
Sanitary Items – Open-Top Tanks – Standard, Sealable, Hopper



**#TANS**  
Sanitary Items – Open Lid Kettle with Selectable Spigot Shape



**#TANC**  
Sanitary Items – Lids for Open Lid Kettles



**NEW**

**#TANE**  
Sanitary Items – Seals for Open Lid Kettles



**#TANT**  
Sanitary Items – Stands for Open Lid Kettles



**#TNKR**  
Sanitary Pipe Fittings – Regulators for Pressure Tank



**#TNKF**  
Sanitary Pipe Fittings – Low Level Float Switch



**NEW**

**#TNKT**  
Through Fittings

**Vacuum Fitting Parts**



**#FRNW**  
NW (KF)/ICF/JIS Flanged Flexible Tubes



**#FRN5**  
Vacuum Pipes – Both Sides Welded, Both Sides NW Flanged



**#FRN1**  
Vacuum Pipes – Both Sides Welded, NW Flanged x Elbow



**#FRN8**  
Vacuum Pipes – Both Sides Welded, NW Flanged x Tees



**#FRN6**  
Vacuum Pipes – Both Sides Welded, NW Flanged x Threaded



**#FRN7**  
Vacuum Pipes – Both Sides Welded, NW Flanged x Flanged



**#FRNV**  
Vacuum Pipes – NW Flanged x VG Flanged



**#FRN4**  
Vacuum Pipe Fittings – Flanged



**#FRNL**  
Vacuum Pipe Fittings – Long Flanged



**#FRNN**  
Vacuum Pipe Fittings – Nipple



**#FRNE**  
Vacuum Pipe Fittings – 90 Deg. Elbows



**#FR03**  
Vacuum Pipe Fittings – Tee



**#FENW**  
Reducing Tees



**#FRNJ**  
Vacuum Pipe Fittings – Reducer



**#FRN3**  
Center Rings



**#FR02**  
Vacuum Pipe Fittings – Center Ring with O-Ring Seal



**#FRN9**  
Vacuum Pipe Fittings – Clamp



**#FRN2**  
Vacuum Pipe Fittings – Blind Flanged



**#FRVF**  
Fittings for Vacuum Plumbing – JIS Flanged, VF



**#FRVG**  
Fittings for Vacuum Plumbing – JIS Flanged, GS



**#FRGP**  
Gage Ports – Single Unit, Welded



**#FRNG**  
Fitting with Gage Port



**#FRNF**  
Vacuum Pipe Fittings – Threaded Male End and Flange End



**NEW**

**#FRNM**  
Female Adapter



**#FRNH**  
Hose Adapter



**#FR01**  
Duct Adapter



**#FRSK**  
Fittings for Vacuum Plumbing – NW Flanged x Swaged Sleeve Fitting



**#FRNB**  
Fittings for Vacuum Plumbing – NW Flanged x Stainless Steel Pipe, Single Nozzle



**#FRND**  
Fittings for Vacuum Plumbing – NW Flanged x Stainless Steel Pipe, Double Nozzle



**#PUVF**  
Tubes – Vacuum Tubes

**Tubes**



**#HOSP**  
Coil Hoses – Spiral Tube



**#EHOS**  
Air Hoses – Standard



**#ERHO**  
Air Hose – Sliding



**#AHOS**  
Air Hoses – High-Flex



**#PUT**  
Tubes – Water Resisting Polyurethane



**#PUTY**  
Tubes – Soft Polyurethane




**#PUTN**  
Tubes – Nylon



**#PUTH**  
Tubes – Pressure Resistance Nylon



**#PUT2**  
Tubes – Soft Nylon Tubes



**#PUTM**  
Tubes – Flat



**#PUT3**  
Tubes – Water Resisting Polyurethane Spiral



**#PUT1**  
Tubes – Multi-Spiral



**#PUTP**  
Tubes – Slit Spirral with Fluoro-Insulated Wire



**#PUTS**  
Tubes – Sputter Resisting



**#PUAS**  
Tubes – Antistatic



**#PORF**  
Tubes – Polyolefin



**#PUTF**  
Tubes – Fluororesin



**#PUFN**  
Tubes – Flexible Fluororesin



**#PUJT**  
Tubes – Soft Fluororesin



**#PUSP**  
Tubes – Spiral Shape



**#PUTB**  
Tubes – Fluoro Rubber, Clear Transparent



**#PUTG**  
Tubes – Fluoro Rubber



**#PUTC**  
Tubes – Silicone



**#CUCL**  
Tube Items – Tube Clips



**#PUIT**  
Tube Items – Soft Tube Inserts




**#TCK**  
Tube Cutters



**#MPUT**  
Tubes – Polyurethane for Compressed Air



**#JCNL**  
Compressed Air – Miniature Connector Fittings



**#MSC3**  
One-Touch Couplings – Threaded Connectors



**#MSC2**  
One-Touch Couplings – Threaded Connector with Hexagon Socket



**#MSSB**  
One-Touch Couplings – Tapped Connector



**#MSEL**  
One-Touch Couplings – Bulkhead Female Straight



**#MSC1**  
One-Touch Couplings – Male 90 Deg. Elbows



**#USST**  
One-Touch Couplings – Union Straight



**#UJDS**  
One-Touch Couplings – Union, Stepped Diameter



**#USEB**  
One-Touch Couplings – Union Elbow



#USTL One-Touch Couplings - Union Tee



#USYL One-Touch Couplings - Y Union



#BSLG One-Touch Couplings - Blind Plug



#MSEG One-Touch Couplings - Long Elbow



#MSEF One-Touch Couplings - 45 Deg. Elbow



#USLC One-Touch Couplings - L-Connector



#USYE One-Touch Couplings - Turn Elbow Union



#USTE One-Touch Couplings - 2 Turn Elbow



#MSTE One-Touch Couplings - Tee, Threaded



#UNYL One-Touch Couplings - FY Elbow Unions



#MSBU One-Touch Couplings - Bulkhead Unions



#MSCA One-Touch Couplings - Cap



#MSYL One-Touch Couplings - Y Union, Threaded



#USDY One-Touch Couplings - Stepped Y Union



#USDT One-Touch Couplings - Stepped Union Tees



#USCR One-Touch Couplings - Cross Union



#USRD One-Touch Couplings - Reducer



#MSPJ One-Touch Couplings - Nipple



#BSLD One-Touch Couplings - Irregular Connection Plug



#DSNY One-Touch Couplings - Manifold, Double Y-Shaped



#DSLJ One-Touch Couplings - Manifold, Double Y-Shaped, Threaded



#DUNL One-Touch Couplings - Manifold, Triple Single



#DUNW One-Touch Couplings - Manifold, Triple Double



#JELL Compressed Air - Miniature Connector Fittings, 90 Deg. Elbow



#JBUL Compressed Air - Bulkhead Union



#JTEL One-Touch Coupling - Compressed Air, Union Tee



#JRDS Miniature One-Touch Coupling - Compressed Air, Reducer



#MNCN Miniature One-Touch Couplings - Connector



#MNCP Miniature One-Touch Couplings - Connector with Hex Socket



#MNC1 Miniature One-Touch Couplings - 90 Deg. Elbow



#MNCL Miniature One-Touch Couplings - Union Elbow



#MNUJ Miniature One-Touch Couplings - Union



#MNCY Miniature One-Touch Couplings - Union Tee



#MNUY Miniature One-Touch Couplings - Y Union



#SRTG Miniature Couplings - Barbed Coupler



**#SRTN**  
Miniature Couplings – Hose Nipple



**#MNPL**  
Miniature Couplings – Nipples, Threaded



**#MELB**  
Miniature Couplings – 90 Deg. Elbows



**#MPLG**  
Miniature Couplings – Screw Plugs



**#MTEN**  
Miniature Couplings – Tees



**#MBSG**  
Miniature Couplings – Reducer Bushing



**#MUTE**  
Miniature Couplings – Universal Tees



**#MCPT**  
Couplings for Tubes – Nut and Sleeve Integrated, Straight



**#MCLP**  
Couplings for Tubes – Nut and Sleeve Integrated, Elbows



**#MCBU**  
Couplings for Tubes – Nut and Sleeve Integrated, Panel Mount



**#MCTP**  
Couplings for Tubes – Nut and Sleeve Integrated, Tees



**#MCUN**  
Couplings for Tubes – Nut and Sleeve Integrated, Union



**#MCUT**  
Couplings for Tubes – Nut and Sleeve Integrated, Union Tees



**#MCTY**  
Couplings for Tubes – Nut and Sleeve Integrated, Half Unions



**#MCU1**  
Couplings for Tubes – Nut and Sleeve Integrated, Half Elbows



**#MCUE**  
Couplings for Tubes – Nut and Sleeve Integrated, Union Elbows



**#TJBN**  
Couplings for Tubes – Nut and Sleeve Integrated, Nipples



**#TJBS**  
Couplings for Tubes – Nut and Sleeve Integrated, Sockets



**#TCRH**  
Couplings with Tube Insert – Nut and Sleeve Integrated, Connectors



**#TCRL**  
Couplings with Tube Insert – Nut and Sleeve Integrated, Elbows



**#TCRF**  
Couplings with Tube Insert – Nut and Sleeve Integrated, Union Elbows



**#TCRS**  
Couplings with Tube Insert – Nut and Sleeve Integrated, Union Connectors



**#TCRT**  
Couplings with Tube Insert – Nut and Sleeve Integrated, Union Tees



**#RTCN**  
Rotary Joints – Connector



**#RTCL**  
Rotary Joints – 90 Deg. Elbow



**#RHTN**  
High Rotary Joints – Straight Connector



**#RHTL**  
High Rotary Joints – 90 Deg. Elbow



**#RHTC**  
High Rotary Joints – Bushings



**#MLCN**  
One-Touch Couplings – All Stainless Steel, Miniature Connector



**#MLEL**  
One-Touch Couplings – All Stainless Steel, 90 Deg. Elbow



**#UNSL**  
One-Touch Couplings – All Stainless Steel, Union



**#UNTE**  
One-Touch Couplings – All Stainless Steel, Tee



**#UNEB**  
One-Touch Couplings – All Stainless Steel, Union 90 Deg. Elbow



**#MLBU**  
One-Touch Couplings – All Stainless Steel, Bulkhead Union



**#KPMS**  
Heat Resistant One-Touch Couplings – Straight



**#KPML**  
Heat Resistant One-Touch Couplings – 90 Deg. Elbow



**#KPMC**  
Heat Resistant One-Touch Couplings – Hexagon Socket



**#KKMS**  
High Heat-Resistant One-Touch Couplings – Straight



**#KKMC**  
High Heat-Resistant One-Touch Couplings – Elbow



**#PPCN**  
One-Touch Couplings for Clean Applications, Connectors



**#PPC1**  
One-Touch Couplings for Clean Applications, 90 Deg. Elbow



**#PPCR**  
One-Touch Couplings for Clean Applications – Straight Union



**#PPCL**  
One-Touch Couplings for Clean Applications – 90 Deg. Union Elbows



**#PPCE**  
One-Touch Couplings for Clean Applications – Tees



**#PPCY**  
One-Touch Couplings for Clean Applications, Y Union



**#PPCG**  
One-Touch Couplings for Clean Applications, Reducer



**#PPMP**  
One-Touch Couplings for Clean Applications – Connector



**#PPSN**  
One-Touch Couplings for Clean Applications – Connectors



**#PPSL**  
One-Touch Couplings for Clean Applications – 90 Deg. Elbow



**#PPSC**  
One-Touch Couplings – Tees, Stainless Thread



**#PPSY**  
One-Touch Couplings for Clean Applications – Y Union, Thread



**#FECT**  
Fluororesin Couplings – Threaded Connector, Bore Through Connector



**#FEML**  
Fluororesin Couplings – 90 Deg. Elbow, Threaded



**#FETP**  
Fluororesin Couplings – Unions



**#FEUE**  
Fluororesin Couplings – 90 Deg. Elbow, Union



**#FEUT**  
Fluororesin Couplings – Union Tee



**#FEUR**  
Fluororesin Couplings – Stepped Unions



**#FETB**  
Fluororesin Couplings – Tube Insert



**#FBT**  
Fluororesin Couplings – 2 Way Valve



**#FBNB**  
Fluororesin Couplings – Needle Valve, 90 Deg. Elbow

**Vacuum Generators / Vacuum Ejectors**



**#VUHK**  
Vacuum Generator – Union, Straight



**#VUB**  
Vacuum Generator – Union, Square



**#BDFK**  
Vacuum Generator with Vacuum Break Function



**#BAFP**  
Vacuum Fall Prevention Valve

**Vacuum Filters**



**#VFLT**  
Vacuum Filter – Filter, Replacement Element



**#VFS**  
Vacuum Filter – Small, Filter, Replacement Element



**#BDFL**  
Vacuum Filter for Generator with Vacuum Break Function



Vacuum Gauges

Manual & Mechanical Valves

Pressure / Flow Rate Sensors

Filters / Regulators / Lubricators

Vacuum Gauges



#VUSS  
Vacuum Pressure Sensor – Union

Manual & Mechanical Valves



#BVHU  
One-Touch Coupling – Shut-Off Valves



#BVHV  
One-Touch Coupling – Shut-Off Valves



#BVUS  
One-Touch Coupling Ball Valves – Union, Single Handle



#BVCS  
One-Touch Coupling Ball Valves – Straight, Single Handle



#BVCE  
One-Touch Coupling Ball Valve – 90 Deg. Elbow, Single Handle



#BVUB  
One-Touch Coupling Ball Valves – Union, Double Handle



#BVC2  
One-Touch Coupling Ball Valves – Straight, Double Handle



#BVGB  
One-Touch Coupling Ball Valve – 90 Deg. Elbow, Double Handle



#BVCV  
One-Touch Couplings Check Valves



#BVHB  
One-Touch Coupling Change Valves



#NCHB  
Switch Valves – Manually Operated, Panel Mount, 2-Port, 3-Port



#MSFF  
Switch Valves – Foot Operated, 2-Port



#MSFB  
Switch Valves – Foot Operated, 3-Port, 4-Port



#MSHP  
Small Switching Valves – Button



#MSH2  
Switch Valves – Manually Operated, Button, Toggle



#MSH1  
Small Switching Valves – Manually Operated, Button, Toggle



#MHAN  
Switch Valves – Manually Operated, Lever



#MHAM  
Hand Switching Valves with Lever



#MSHB  
Hand Switch Valve – Toggle Grip



#EQXC  
Quick Exhaust Valves – Standard, Open to Air with Exhaust Throttle



#EQU  
Quick Exhaust Valves – Straight, Open to Air



#EQEJ  
Union – Open to Air with Exhaust Throttle

Pressure / Flow Rate Sensors



#GPCS  
Pressure Gauges – Straight



#GPUS  
Pressure Gauges – Union Straight

Filters / Regulators / Lubricators



#RGC  
Regulators – Elbows



#RGUJ  
Regulators – Unions



#MSFR  
Air Regulators – With Filter



#MSRR  
Lubricator



#MSAF  
Air Filter



#MSR  
Air Regulator





#MDTN  
Drain Trap



#MSFA  
Service Units – Regulator, Filter, Filter



#MSF1  
Service Units – Regulator, Filter, Lubricator

Silencers



#MSSJ  
Silencer

Seal Materials



#NPA  
O-Rings – P Series



#NSA  
O-Rings – S Series



#NGA  
O-Rings – G Series



#NVA  
O-Rings – V Series, AS Series



#MPPE  
P Series – Chemical, Heat Resistant



#DFA  
O-Rings – Large Diameter



#GSW  
Seal Washers – Bolt Head



#GSWM  
Seal Washers – Thread Style, Standard



#GSWC  
Seal Washers – SHCS Style, Standard



#FSPS  
Seal Plugs



#MFHN  
Oil Free Seals – For Rotary Motion



#MUSB  
Oil Free Seals – For Rotary Motion



#MUDN  
Oil Free Seals – For Rotary Motion

Suction Cups / Suction Components



#SRK  
Vacuum Fittings



#SRP  
Suction Cups



#MHLD  
Holders for Mini Suction Cups



#RBTR  
Mini Suction Cups – Round, Square



#MKPE  
Vacuum Pens



#NIGR  
Vacuum Attachments Chip



#NSUS  
Vacuum Attachments Fine



#NPUN  
Vacuum Attachments Conductive Rubber Suction



#MVFK  
Suction Cups – with Fitting, Spring, K-Shape



#MVFT  
Suction Cups – with Fitting, Spring, T-Shape



#MVFL  
Suction Cups – with Fitting, Spring, L-Shape



#MVFS  
Vacuum Fittings – Standard, Deep, Direct Mount Spring, S-Shape



#MVFR  
Vacuum Fittings – Standard, Deep, Spring, Long Stroke, R-Shape



#MVPJ  
Vacuum Fittings – Small, Direct Mount, J-Shape



**#VPFF**  
Suction Cups – Standard, Deep, Small



**#MVBK**  
Vacuum Fittings – Sponge, Bellows, Fixed



**#MVBT**  
Vacuum Fittings – Sponge, Bellows, Spring, T-Shape



**#MVBL**  
Vacuum Fittings – Sponge, Bellows, Spring, L-Shape



**#MVBS**  
Vacuum Fittings – Sponge, Bellows, Direct Mount Spring, S-Shape



**#MVBR**  
Vacuum Fittings – Sponge, Bellows, Spring, Long Stroke, R-Shape



**#VPBE**  
Suction Cups – Sponge, Bellows



**#MVPA**  
Vacuum Attachments



**#MVCK**  
Vacuum Fittings – Soft/Soft Bellows, Fixed, K-Shape



**#MVCT**  
Vacuum Fittings – Soft/Soft Bellows, Spring, T-Shape



**#MVCL**  
Vacuum Fittings – Soft/Soft Bellows, Spring, L-Shape



**#MVCS**  
Vacuum Fittings – Soft/Soft Bellows, Direct Mount Spring, S-Shape



**#MVCM**  
Vacuum Fittings – Soft, Vacuum Cylinder, M-Shape



**#VPCE**  
Suction Cups – Soft/Soft Bellows



**#MVEK**  
Vacuum Fittings – Oval, Thin Object, Fixed, K-Shape



**#MVET**  
Vacuum Fittings – Oval, Thin Object, Spring, T-Shape



**#MVEL**  
Vacuum Fittings – Oval, Thin Object, Spring, L-Shape



**#MVES**  
Vacuum Fittings – Oval, Thin Object, Direct Mount Spring, S-Shape



**#MVER**  
Vacuum Fittings – Oval, Spring, Long Stroke, R-Shape



**#VPES**  
Suction Cups – Oval




**#VPTS**  
Suction Cups – For Thin Objects

**Nozzles**




**#AFTF**  
Flat Air Nozzles – Standard



**#AFTS**  
Flat Air Nozzles – Standard




**#AFTW**  
Flat Air Nozzles – Wide



**#AFTC**  
Air Nozzles – Compact



**#AFTA**  
Flat Air Nozzles – Amplify



**#AFTD**  
Flat Air Nozzles – Amplify



**#AFT3**  
Flat Air Nozzles – Amplify, Wide



**#AFT5**  
Flat Air Nozzles – Amplify, Compact



**#AFT4**  
90 Deg. Air Nozzles – Standard



**#AFTR**  
90 Deg. Air Nozzles



**#AFT2**  
90 Deg. Air Nozzles – Wide



**#AFTV**  
90 Deg. Air Nozzles – Vertical Blow



**#AFTH**  
High Flow Rate Nozzles for Blowers



**#AFTB**  
Flat Air Nozzles Compact for Blowers



**#NZAK**  
Spray Nozzles – Economy



**#ALVA**  
Air Nozzles – De Laval



**#ARDA**  
Spray Nozzles – Round



**#ARDD**  
Spray Nozzles – Circular Spray Pattern, Amplify



**#SKNF**  
Nozzles with Bite Tube Fitting



**#PNZR**  
Air Blow Nozzles – Swivel Point



**#PNZC**  
Point Nozzles – Compact, Screw-In



**#PNZV**  
Point Nozzles – Back Flow Check



**#SPNZ**  
Rotary Nozzles



**#AFCS**  
Flow Rate Control Nozzles



**#ACNA**  
Conical Air Nozzles



**#AEDA**  
Radial Air Nozzles



**#ABNK**  
Air Blow Nozzles – Threaded, Tapped, Knurling Criss-Cross, Terminal Block



**#ABNH**  
Air Blow Nozzles – Threaded, Tapped, 2-Core, Barbed, Hose Nipple



**#PNMC**  
Air Blow Nozzles – Pipe Nozzles



**#DKNZ**  
Air Blow Nozzles – Copper Pipes



**#PLNZ**  
Nozzles with Attachment Plate



**#SGPP**  
Pipe Nozzles – Threaded, Tapped Ends



**#SLTF**  
Pipe Nozzles – Steel with Slit



**#PWNZ**  
Nozzles for Pipe Washing



**#AMF**  
Pipe Nozzles – Steel Pipes for Air Nozzles



**#NZTA**  
Terminals for Nozzles – Clamp



**#NZTB**  
Terminals for Nozzles – Block



**#NJFS**  
Spray Nozzles – Nozzle Joint



**#WANR**  
Spray Nozzles – Two-Fluid Nozzles



**#NZRF**  
Spray Nozzles – Fan-Shape Spray Pattern, 90 Deg.



**#NZRV**  
Spray Nozzles – Fan Shape Spray Pattern



**#NZRT**  
Spray Nozzles – Angular Shape Spray



**#NZRK**  
Spray Nozzles – Annular Shape Spray Pattern, 90 Deg. Nozzle



**#NZRC**  
Spray Nozzles – Full Circular Shape Spray Pattern



**#NZRS**  
Spray Nozzles – Rod Shape Spray Pattern



**#NZRA**  
Spray Nozzles – Variable Shape



**#HLAJ**  
Adjustable Hoses – Standard, L-Shaped, Branch



**#HJD**  
Adjustable Hoses – Hose Only



Nozzles

Compressors / Blowers

Cylinders / Air Grippers

Cylinder Connecting Components



**#AAJD**  
Adjustable Hoses – Connector Only



**#HAKD**  
Adjustable Hoses – Nozzle Only



**#HOSA**  
Mounting Tool for Adjustable Hoses

**Compressors / Blowers**



**#VBYE**  
Turbo Blower

**Cylinders / Air Grippers**



**#MPPY**  
Air Linear Guides – MPPT6Y Series



**#MPPT**  
Air Linear Guides – MPPT8 Series



**#MPP1**  
Air Linear Guides – MPPT10 Series



**#MPP2**  
Air Linear Guides – MPPT12 Series



**#MPP6**  
Air Linear Guides – MPPT26 Series



**#MPPU**  
Air Linear Guides – MPPU10 Series



**#MPP3**  
Air Linear Guides – MPPTU12 Series



**#MSCC**  
Compact Cylinders



**#MD11**  
Sensors for Cylinders



**#CFKP**  
Compact Cylinder Brackets – Foot Brackets



**#CTKB**  
Compact Cylinder Brackets – Clevis Mount



**#MSCL**  
Compact Cylinder Brackets – L-Shaped, T-Shaped



**#CYPF**  
Compact Cylinder Brackets – Cylinder Trunnion Plates



**#MSCF**  
Small Cylinders – Sensor Slot Unit



**#MSMC**  
Small Cylinders – Tip Shape Selectable



**#MSP1**  
Air Cylinders – Panel Mount, Single Acting



**#MSPC**  
Air Cylinders – Pen, Double Acting



**#MSRC**  
Rotary Clamp Cylinder Brackets – Pen-Shaped Air Cylinder



**#MGCL**  
Cylinders with Twin Guides



**#MKRC**  
Rotary Clamp Cylinders



**#MT10**  
Auto-Switch



**#RCLA**  
Rotary Clamp Cylinder Brackets – Straight



**#RCYB**  
Rotary Clamp Cylinder Brackets – Square



**#RCYG**  
Rotary Clamp Cylinder Brackets – U-Shaped



**#ACHE**  
Air Gripper – Parallel



**#ACHA**  
Attachments for Air Grippers



**#YFTB**  
Fingers for Air Grippers – Direct Mounting, Flat

**Cylinder Connecting Components**



**#FJEB**  
Coupling Rods for Air Cylinders





NEW

**#FJR**  
Floating Joints – Tapped Cylinder Connector and Holder Set



**#FJSC**  
Floating Joints – Metal Plate Holders



**#FJG**  
Floating Joints – Tapped Cylinder Connector Fixed



**#FJGF**  
Floating Joints – Tapped Cylinder Connector Configurable



**#FJN**  
Floating Joints – Separate Nut, Washer



✔

**#FJCL**  
Floating Joints – Tapped Circular



NEW

**#FJDH**  
Floating Joints – Threaded Cylinder Connector and Holder Set



**#FJD2**  
Floating Joints – Threaded Connector Only



**#FJDL**  
Floating Joints – Threaded Configurable



**#FJCM**  
Floating Joints – Threaded Circular



**#FJNM**  
Floating Joints – Separate Thread



**#FJBR**  
Floating Joints – Bolt Mount



★

**#HLRA**  
Holders – Side Mount, Flange, T-Fixed



**#HLR2**  
Holders – Bottom Mount, Flange



✔

**#HLR1**  
Holders – Top Mount, Flange



**#HLRB**  
Holders – Side Mount, Bar, Height H-Fixed



**#HLRH**  
Holders – Bottom Mount, Bar



**#HLRD**  
Holders – Top Mount, Bar



**#HLRE**  
Holders – Compact, T-Slot



**#HLRL**  
Holders – L-Shaped



✔

**#FJMH**  
Floating Joints – T-Slots with Pilot, Threaded



**#FJH**  
Floating Joints – T-Slots with Pilot, Tapped



**#FJMW**  
Floating Joints – T-Slots Through Hole, Threaded



**#FJW**  
Floating Joints – T-Slots Through Hole, Tapped



**#TCMJ**  
Tip Connection Joints – Threaded



**#TCJ**  
Tip Connection Joints – Tapped



★ ✔

**#FJA**  
Floating Joints – Flange Mounting, Tapped



✔

**#FJMA**  
Floating Joints – Flange Mounting, Cylinder Connector, Threaded



**#FJAT**  
Floating Joints – Cylinder Connectors, Flange, Set, Mount Flange



**#FJAZ**  
Floating Joints – Mount Flange Set, Cylinder Connector



**#BPFA**  
Floating Joint Backing Plates



**#FJCF**  
Floating Joints – Low Hardness, Low Hardness Thin



**#BPFJ**  
Floating Joints – Backing Plates



**#FJY**  
Floating Joints – Slide, Set, Connector, Mounting Flange



✔

**#FLCM**  
Floating Connectors – Miniature



**#FLCT**  
Floating Connectors – Screw-In



**#FLCF**  
Floating Connectors – Flange Mounting



**#FLCL**  
Floating Connectors – Bracket Mounting



**#FJX**  
Floating Joints – Extra Short Threaded Stud Mount, Tapped



**#FJMX**  
Floating Joints – Extra Short Threaded Stud Mount, Threaded



**#FJXL**  
Floating Connectors – Extra Short, Foot Mount, Tapped



**#FJML**  
Floating Connectors – Extra Short, Foot Mount, Threaded



**#FJCC**  
Floating Connectors – Extra Short, Flange Mounting, Tapped



**#FJMC**  
Floating Connectors – Extra Short, Flange Mounting, Threaded



**#KPMF**  
Metal Pushers – Threaded



**#KPHF**  
Metal Pushers – Tapped



**#URCP**  
Urethane Caps



**#URLH**  
Bumpers – Urethane, Silicon, Tapped, Flat, Round



**#USLH**  
Bumpers – Urethane, Silicon, Threaded, Flat, Round



**#SLLM**  
Bumpers – Urethane, Silicon, Fluororubber, Low Hardness Urethane, Tapped



**#SSLM**  
Bumpers – Urethane, Silicon, Fluororubber, Low Hardness Urethane, Threaded



**#PSHH**  
Bumpers – Large Diameter, Polyurethane, MC Nylon, Tapped



**#PSHD**  
Bumpers – Large Diameter, Polyurethane, MC Nylon, Threaded



**#PSHE**  
Bumpers – Small Diameter, Polyurethane, Tapped



**#PSH1**  
Bumpers – Small Diameter, Polyurethane, Threaded



**#PSHC**  
Resin Bumpers – Standard, Tapped



**#PSH2**  
Resin Bumpers – Standard, Threaded



**#JPHJ**  
Resin Bumpers – Round



**#JPFJ**  
Resin Pushers – Flat, Spherical, Tapered



**#NJCB**  
Knuckle Joints – Extra Short



**#NJUT**  
Knuckle Joints – Toolless Unit



**#NJNT**  
Knuckle Joints – Fixed, Prong, Notch



**#NJSB**  
Knuckle Joints – Tapped, Selectable



**#FNNB**  
Knuckle Joints – Tapped, Configurable



**#FNMB**  
Knuckle Joints – Threaded, Configurable

**Flow Rate Controllers**



**#JNL**  
Flow Rate Control Valves – Compressed Air



**#SPSN**  
Flow Rate Control Valves – 90 Deg. Elbow, Standard



**#SPJY**  
Flow Rate Controllers – Union Straight



**#MNSP**  
Flow Rate Control Valves – 90 Deg. Elbow, Miniature



**#SPSS**  
Flow Rate Controller – Straight, Meter Out



**#MNSJ**  
Flow Rate Control Valve – 90 Deg. Elbow, Angled Port



**#SPJC**  
Flow Rate Control Valves – In-Line



**#SPJS**  
Flow Rate Control Valves – In-Line, Miniature



**#SPCN**  
Flow Rate Controllers – Low Height



**#NBDY**  
Flow Rate Control Valves – Valve with Adjusting Dial



**#ASPS**  
Flow Rate Control Valves – 90 Deg. Elbow, Stainless Steel



**#KSPS**  
Flow Rate Control Valves – 90 Deg. Elbow, Heat Resistant



**#PJSP**  
Flow Rate Control Valves – 90 Deg. Elbow



**#SEJC**  
Throttle Valves – 90 Deg. Elbow



**#SEJR**  
Throttle Valves – Union



**#RGCM**  
Regulators – 90 Deg. Elbow with Gauge



**#RGUN**  
Regulators – In-Line with Gauge

Connecting Bars / Link Cables / Wires



**#CWP**  
Link Cables



**#LBRB**  
Rod End Coupling Rods – Both Ends Threaded



**#LBMB**  
Rod End Coupling Rods – Both Ends Tapped



**#LBGF**  
Rod End Coupling Rods – Threaded, Tapped

Rod Ends / Spherical Bearings



**#PHSC**  
Rod End Bearings – Standard



**#RBLD**  
Rod End Bearings – 90 Deg. Link Ball



**#RBID**  
Rod End Bearings – Link Ball with Thread



**#RBPB**  
Spherical Bearings – Standard



**#RBPC**  
Spherical Bearing with Housing – Compact

Hinge Bases / Joint Plates / Bolts



**#DNDN**  
Wing Hinge Screws

NEW



**#HGBB**  
Hinge Bolt – Left/Right Hand Thread



**#HKNB**  
Hinge Bases – U-Shaped, Fixed Dimension



**#HKNK**  
Hinge Bases – T-Shaped, Fixed Dimension



**#HPAN**  
Hinge Plates – Standard



**#HPE**  
Hinge Plates – R-Type



**#JNPB**  
Hinge Plates – Economy



**#HKPB**  
Hinge Bases – U-Shaped



**#HKTB**  
Hinge Bases – T-Shaped, Standard, Oil-Free



**#HGHH**  
Hinge Bases – T-Shaped, U-Shaped



**#HGAA**  
Hinge Bases – Standard, Miniature



**#HGNJ**  
Thick Hinge Bases – U-Shaped, A Compact, W/H Configurable



**#HGNN**  
Thick Hinge Bases – T-Shaped, Standard, W/H Configurable



**#HKUB**  
Hinge Bases – U-Shaped, Bottom Mount



**#HGB2**  
Hinge Bases – T-Shaped, Bottom Mount



**#HGSU**  
Hinge Bases – U-Shaped, Side Mount



**#HKSB**  
Hinge Bases – T-Shaped, Side Mount



**#HBNT**  
Hinge Bases – With Center Hole, Bottom Mount



**#HGCC**  
Hinge Bases – With Center Hole, T-Shape, U-Shape



**#HGCN**  
Hinge Bases – Center Fulcrum



**#HGCJ**  
Hinge Bases – Thick, Center Fulcrum



**#HGLN**  
Hinge Bases – L-Shaped, Standard, Tapped Hole for Stopper



**#HGLJ**  
Hinge Bases – Thick L-Shaped

**Links**



**#LNDB**  
Links – Standard



**#LNFT**  
Links – 3-Hole



**#LKBK**  
Links – Angled, 3-Hole



**#LINB**  
Links – Standard, Squared Edges



**#LNBB**  
Links – Bearing Embedded



**#LNMS**  
Links – Oil-Free Bushing Press-Fit



**#LNCB**  
Links – Notched



**#LNDL**  
Links – Slotted Hole



**#LKSF**  
Link Bars/Threaded/Tapped



**#LACF**  
Links – Both Ends Female Notch



**#CLKA**  
Clamp Links – For Rod End Bearing



**#CLKW**  
Clamp Links – 2 Clamps





Sensor Cams /  
Flags



#HPSC  
Photo Sensor Cams – Solid



#HPJC  
Photo Sensor Cams – Resin



#HPS1  
Photo Sensor Cams – Clamping



#PSC  
Photo Sensor Cams – 180 Deg.



#HPSA  
Photo Sensor Cams –  
Angle Adjustment







#DGSM  
Switch Flags – Setscrew, One  
Ends Cone with Thru Hole



#DGW  
Switch Flags – Slit, One End Cone  
with Thru Hole

Sensor Cams /  
Flags

EX Example

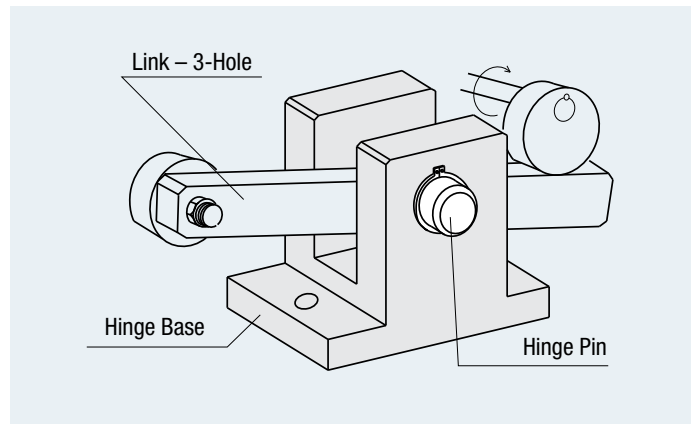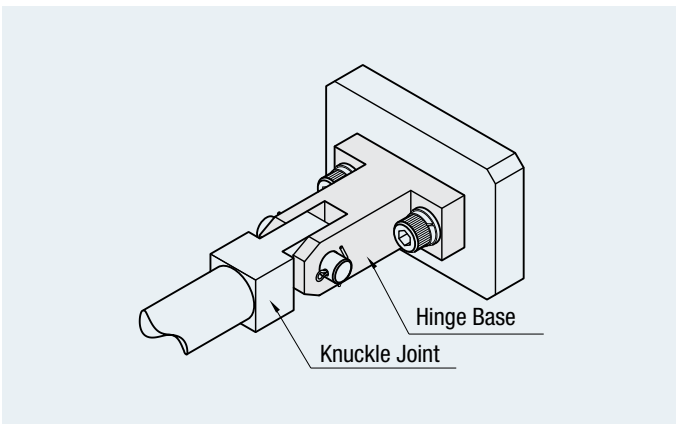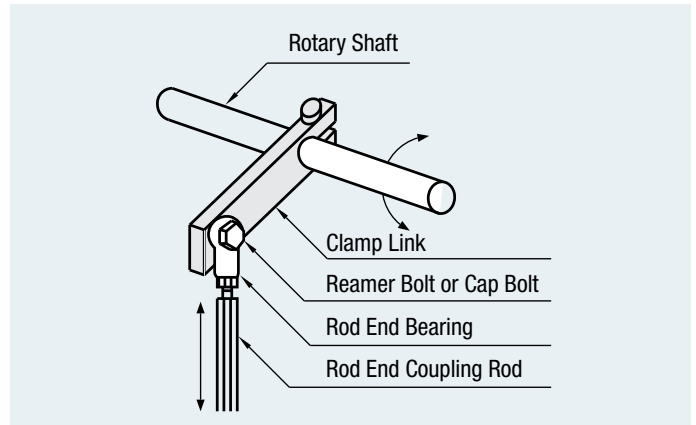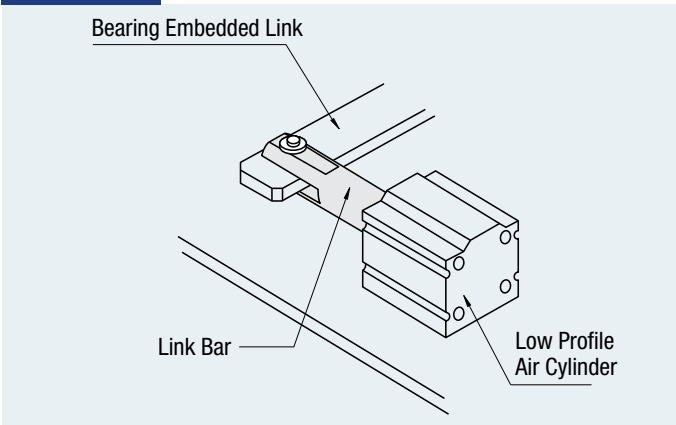

Enter Web Code (ex. #SFJ)



LOW HEAT INSULATING PLATES

MAX OPERATING TEMPERATURE

HEAT INSULATING SHEETS HIGH

Product Name	High Strength	High Insulation	Standard	Free-Cutting	Thermal Plates (Circular)	High Temp Resistance	High Temp High Insulation	Heat Resistance	Heat Insulating (Thin) Plates			Very High Temp Resistance	Insulating Papers
Recommended Operating Temperature	Room to 180°C	Room to 180°C	Room to 220°C	Room to 300°C	Room to 350°C	-80~400°C	Room to 400°C	Room to 500°C	-80~800°C			Room to 1000°C	Room to 1300°C
Available Color	Brown	Natural Color	White	Gray	Various	White	White	Gray	Brown	White	Gray	White	White
Base Material	Glass Fiber	Glass Fiber	Glass Fiber	Glass Fiber	Glass Fiber	Glass Fiber	Glass Fiber	Glass Fiber	Glass Fiber*			Calcium Silicate	Ceramic Fiber
Filler Material	Super Heat Resistant Epoxy Resin	ISO Type Unsaturated Polyester	Silicic Acid Base	Cement	Calcium Silicate Base Binder	Calcium Silicate Base Binder	Calcium Silicate Base Binder	Borate Type	—			Calcium Silicate	—
Thermal Conductivity [W/m²K]	0.59	0.13	0.71	0.44	0.07	0.24	0.08	1.21	0.11			0.2	0.07 (at 400°C) 0.16 (at 1000°C)
Thickness [mm]	3-15	3-15	3-15	5-15	3-10	3-15	3-15	3-15	1-2			1/2"-1"	1-3
Sizes [mm x mm]	600 x 800	600 x 800	600 x 800	600 x 800	Ø400	600 x 800	600 x 800	600 x 800	500 x 500			600 x 800	600 x 800
Compression Strength¹ [kgf/mm²]	51-60	31.9	15-20	11	0.12	44.7	18.5	12-15	—			0.45	—
Specific Gravity	1.8-2.0	1.41	2.0-2.2	1.75	0.5	2	1.2	2.0-2.2	—			—	—
Cost \$	\$\$\$	\$\$	\$\$	\$\$	\$\$	\$\$\$\$	\$\$\$\$	\$\$	\$			\$\$	\$

\*Glass Fiber and bonding materials including inorganic mineral and filler 1) Compression Strength-perpendicular to lamination

### Heat Insulating Plates



**#HIPA**  
Heat Insulating Plates – Standard, Heat Resistant Grade



**#HIPL**  
High Strength Grade, High Temperature Resistant Grade



**#HIP1**  
High Temperature Insulating, High Temperature Super Insulating Grade



**#HRMB**  
High Temperature Insulating Grade



**#HIPC**  
Heat Insulating Plates – Free-Cutting Grade, Thermal Plates



**#HIFP**  
Insulating Papers



**#HIPK**  
Heat Insulating Plates – High Temperature Insulating Grade, With/Without Holes



**#ENJH**  
Heat Insulating Plates – Circular



**#KJLH**  
Bakelite – Epoxy Glass, Insulating

### Heaters



**#HTPL**  
Cartridge Heaters Items – Hot Plates



**#MCKN**  
Cartridge Heaters Items – Mounting Bolts



**#MSH3**  
Connecting Parts for Heaters – Welding Sockets, PF Threaded

### Hot Air Generators



**#HOTD**  
Heat Resistant Duct Hoses – For Hot Air Generating Units


### Cooling Related Products



**#HEAT**  
Heatsinks



**#HTCH**  
Heat Radiation Gel Sheets



**#HTPC**  
Cartridge Heater Items – Cooling Plates



**#PELT**  
Peltier Cooling Unit



**#MAJC**  
Jet Air Coolers – Standard, Compact, Low Temperature

Temperature Sensors



**#FLOS**  
Float Switches – Horizontal, Vertical



**#MSPL**  
Connecting Parts for Temperature Sensors – Plugs, Mounting Holders



**#MSND**  
Temperature Sensors – Standard, K-Thermocouple



**#MSFJ**  
Temperature Sensors – Terminal Selectable, K-/J-Thermocouple



**#MSNL**  
Temperature Sensors – L-Shape, K-Thermocouple



**#MSN5**  
Temperature Sensors – Lead Wire Protection, K-Thermocouple



**#MSNH**  
Temperature Sensors – Heat Resistant, K-Thermocouple



**#TCKC**  
Temperature Sensors – Compact, K-Thermocouple, Temperature-Resistor



**#TCKT**  
Temperature Sensors – Taper Thread, K-Thermocouple, Temperature-Resistor



**#TCKF**  
Temperature Sensors – Flanged, K-Thermocouple, Temperature-Resistor



**#MFSK**  
Temperature Sensors – Sheath, For Moving Parts, K-Thermocouple



**#MCNF**  
Temperature Sensors – Connector, K-Thermocouple



**#MSWK**  
Temperature Sensors – Double Element, K-Thermocouple



**#MFLS**  
Temperature Sensors – Chemical Resistant, K-Thermocouple



**#MSNS**  
Temperature Sensors – Round Crimp Terminal, K-Thermocouple



**#MFMT**  
Temperature Sensors – Round Crimp Terminal, For Moving Part, K-Thermocouple



**#MSNY**  
Temperature Sensors – Spade Crimp Terminal, K-Thermocouple



**#MSNM**  
Temperature Sensors – Screw Mount, K-Thermocouple



**#MFNC**  
Temperature Sensors – Screw Mount, For Moving Parts, K-Thermocouple



**#MSN1**  
Temperature Sensors – Band Connector, K-Thermocouple



**#MSNB**  
Temperature Sensors – Spring Contact, K-Thermocouple



**#MFEK**  
Temperature Sensors – Temperature Measuring Surface



**#MMGK**  
Temperature Sensors – Magnetic Connector



**#MSEN**  
Sheathed Thermocouples




**#DSEN**  
Compensation Lead Wires



**#MSN4**  
K-Thermocouple Connectors



**#MBMS**  
Bimetal Thermostats



**#THRM**  
Thermostats




**#THRB**  
Boxes for Thermostats




**#THRP**  
Thermostats Items – Protection Pipes




Mounting Plates / Brackets




#JTDA  
Sheet Metal Mounting Plates




#JTDB  
Sheet Metal Mounting Plates




#JTDC  
Sheet Metal Mounting Plates




#JTMA  
Sheet Metal Mounting Plates




#JTAA  
Sheet Metal Mounting Plates




#JTBA  
Sheet Metal Mounting Plates




#JTCA  
Sheet Metal Mounting Plates




#JTNA  
Sheet Metal Mounting Plates




#JTJA  
Sheet Metal Mounting Plates




#JTJB  
Sheet Metal Mounting Plates




#JTDA  
Sheet Metal Mounting Plates




#JTDE  
Sheet Metal Mounting Plates




#JTAB  
Sheet Metal Mounting Plates




#JTBB  
Sheet Metal Mounting Plates




#JTAC  
Sheet Metal Mounting Plates




#JTAD  
Sheet Metal Mounting Plates




#HRCZ  
Flat Bars Mounting Plates,  
Brackets – Center Symmetrical




#HRMZ  
Flat Bars Mounting Plates,  
Brackets – Center Symmetrical




#HRMCD  
Flat Bars Mounting Plates,  
Brackets – Center Symmetrical




#HRZZ  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




#HRMQ  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




#HRNQ  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




#HRNR  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




#HRCA  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




#HRMP  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




#HRMA  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




#HRCB  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




#HRMD  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable



#HRFD  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




#HRJD  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




NEW

**#HRFC**  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




NEW

**#HRJC**  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




NEW

**#HRM1**  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




**#HRM2**  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




NEW

**#HRMS**  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




★

**#HRMC**  
Flat Bars Mounting Plates,  
Brackets – B Dim. Selectable




**#HFZZ**  
6 Surface Milled Mounting  
Plates – Brackets




★

**#HFMQ**  
6 Surface Milled Mounting  
Plates – Brackets




NEW

**#HFNQ**  
6 Surface Milled Mounting  
Plates – Brackets




**#HFNR**  
6 Surface Milled Mounting Plates –  
Brackets




NEW

**#HFCM**  
6 Surface Milled Mounting Plates –  
Brackets




**#HFMP**  
6 Surface Milled Mounting  
Plates – Brackets




NEW


**#HFMS**  
6 Surface Milled Mounting  
Plates – Brackets




**#HFCA**  
6 Surface Milled Mounting  
Plates – Brackets




**#HFMD**  
6 Surface Milled Mounting Plates –  
Brackets




**#HFFD**  
6 Surface Milled Mounting Plates –  
Brackets



**#HFJD**  
6 Surface Milled Mounting  
Plates – Brackets




**#HFFC**  
6 Surface Milled Mounting  
Plates – Brackets




NEW

**#HFJC**  
6 Surface Milled Mounting  
Plates – Brackets




NEW

**#HFMA**  
6 Surface Milled Mounting Plates –  
Brackets




★

**#HFMM**  
6 Surface Milled Mounting Plates –  
Brackets




NEW

**#HFMI**  
6 Surface Milled Mounting  
Plates – Brackets




**#HFMC**  
6 Surface Milled Mounting  
Plates – Brackets




NEW

**#VFMQ**  
6 Surface Milled Mounting Plates  
Brackets – Side Hole




NEW


**#VFMP**  
6 Surface Milled Mounting Plates  
Brackets – Side Hole



**#VFMM**  
6 Surface Milled Mounting Plates –  
Brackets - Side Hole




**#VFMA**  
6 Surface Milled Mounting Plates –  
Brackets - Side Hole




NEW ★

**#FSLA**  
L-Sheet Metal Mounting Plates –  
Brackets




NEW

**#FSLB**  
L-Sheet Metal Mounting Plates –  
Brackets




NEW

**#FSMA**  
L-Sheet Metal Mounting Plates –  
Brackets




NEW

**#FSDA**  
L-Sheet Metal Mounting Plates –  
Brackets




NEW

**#FSSB**  
L-Sheet Metal Mounting Plates –  
Brackets




NEW


**#FSMC**  
L-Sheet Metal Mounting Plates –  
Brackets




**#FALZ**  
L-Sheet Metal Mounting Plates –  
Brackets



**#FALA**  
L-Sheet Metal Mounting Plates –  
Brackets




**#FALC**  
L-Shape Metal Mounting Plates – Brackets




**#FALD**  
L-Shape Metal Mounting Plates – Brackets

**NEW**




**#FACA**  
L-Shape Metal Mounting Plates – Brackets

**NEW**




**#FALB**  
L-Shape Metal Mounting Plates – Brackets


★




**#FASB**  
L-Shape Metal Mounting Plates – Brackets




**#FAMA**  
L-Shape Metal Mounting Plates – Brackets



**#FAMC**  
L-Shape Metal Mounting Plates – Brackets




**#FAPA**  
L-Shape Metal Mounting Plates – Brackets



**#FADA**  
L-Shape Metal Mounting Plates – Brackets

**NEW**




**#FADB**  
L-Shape Metal Mounting Plates – Brackets

**NEW**




**#FAMD**  
L-Shape Metal Mounting Plates – Brackets

**NEW**



**#FAEA**  
L-Shape Metal Mounting Plates – Brackets


**NEW**



**#FAMB**  
L-Shape Metal Mounting Plates – Brackets


**#FANA**  
L-Shape Metal Mounting Plates – Brackets

**NEW**




**#FANA**  
L-Shape Metal Mounting Plates – Brackets

**#FATB**  
L-Shape Metal Mounting Plates – Brackets




**#LRAM**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW** ★




**#LRCT**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LRCF**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LRCD**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LRCM**  
L-Shape Finished Angle Mounting Plates – Brackets




**#LRDD**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LAF3**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW** ★




**#LAF2**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LAFS**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LAFN**  
L-Shape Finished Angle Mounting Plates – Brackets




**#LAFZ**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LAF4**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LAFW**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LAFD**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LAF1**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LAFB**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LAF6**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LAFC**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW**




**#LAF7**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW** ★




**#LAFF**  
L-Shape Finished Angle Mounting Plates – Brackets

**NEW** ★




NEW

#LAF5  
L-Shape Finished Angle Mounting  
Plates - Brackets




NEW ★

#LFWA  
L-Shape Finished Angle Mounting  
Plates - Brackets




NEW

#LFWD  
L-Shape Finished Angle Mounting  
Plates - Brackets




NEW

#WASA  
Welded Mounting Plates,  
Brackets - L-Shaped



NEW


#WAWA  
Welded Mounting Plates,  
Brackets - L-Shaped




#SWBZ  
Sheet Metal Mounting Plates,  
Brackets - Z-Shaped



#SWCA  
Sheet Metal Mounting Plates,  
Brackets - Z-Shaped




#SWBA  
Sheet Metal Mounting Plates,  
Brackets - Z-Shaped




#SWBC  
Sheet Metal Mounting Plates,  
Brackets - Z-Shaped




#SWCB  
Sheet Metal Mounting Plates,  
Brackets - Z-Shaped




#SWBB  
Sheet Metal Mounting Plates,  
Brackets - Z-Shaped




#SWBD  
Sheet Metal Mounting Plates,  
Brackets - Z-Shaped




#BLUZ  
Sheet Metal Mounting Plates,  
Brackets - Convex Bent




#BLUE  
Sheet Metal Mounting Plates,  
Brackets - Convex Bent




#BLUF  
Sheet Metal Mounting Plates,  
Brackets - Convex Bent




#BLUJ  
Sheet Metal Mounting Plates,  
Brackets - Convex Bent




#BFHN  
Sheet Metal Round Plates




#BFHA  
Sheet Metal Round Plates




#BFHB  
Sheet Metal Round Plates



#BFH2  
Sheet Metal Round Plates




#BFHF  
Sheet Metal Round Plates



#BFHE  
Sheet Metal Round Plates

## REFERENCE INDEX

Use this section to find Machined parts by shape or resin materials, as well as MISUMI USA's actuator product line.

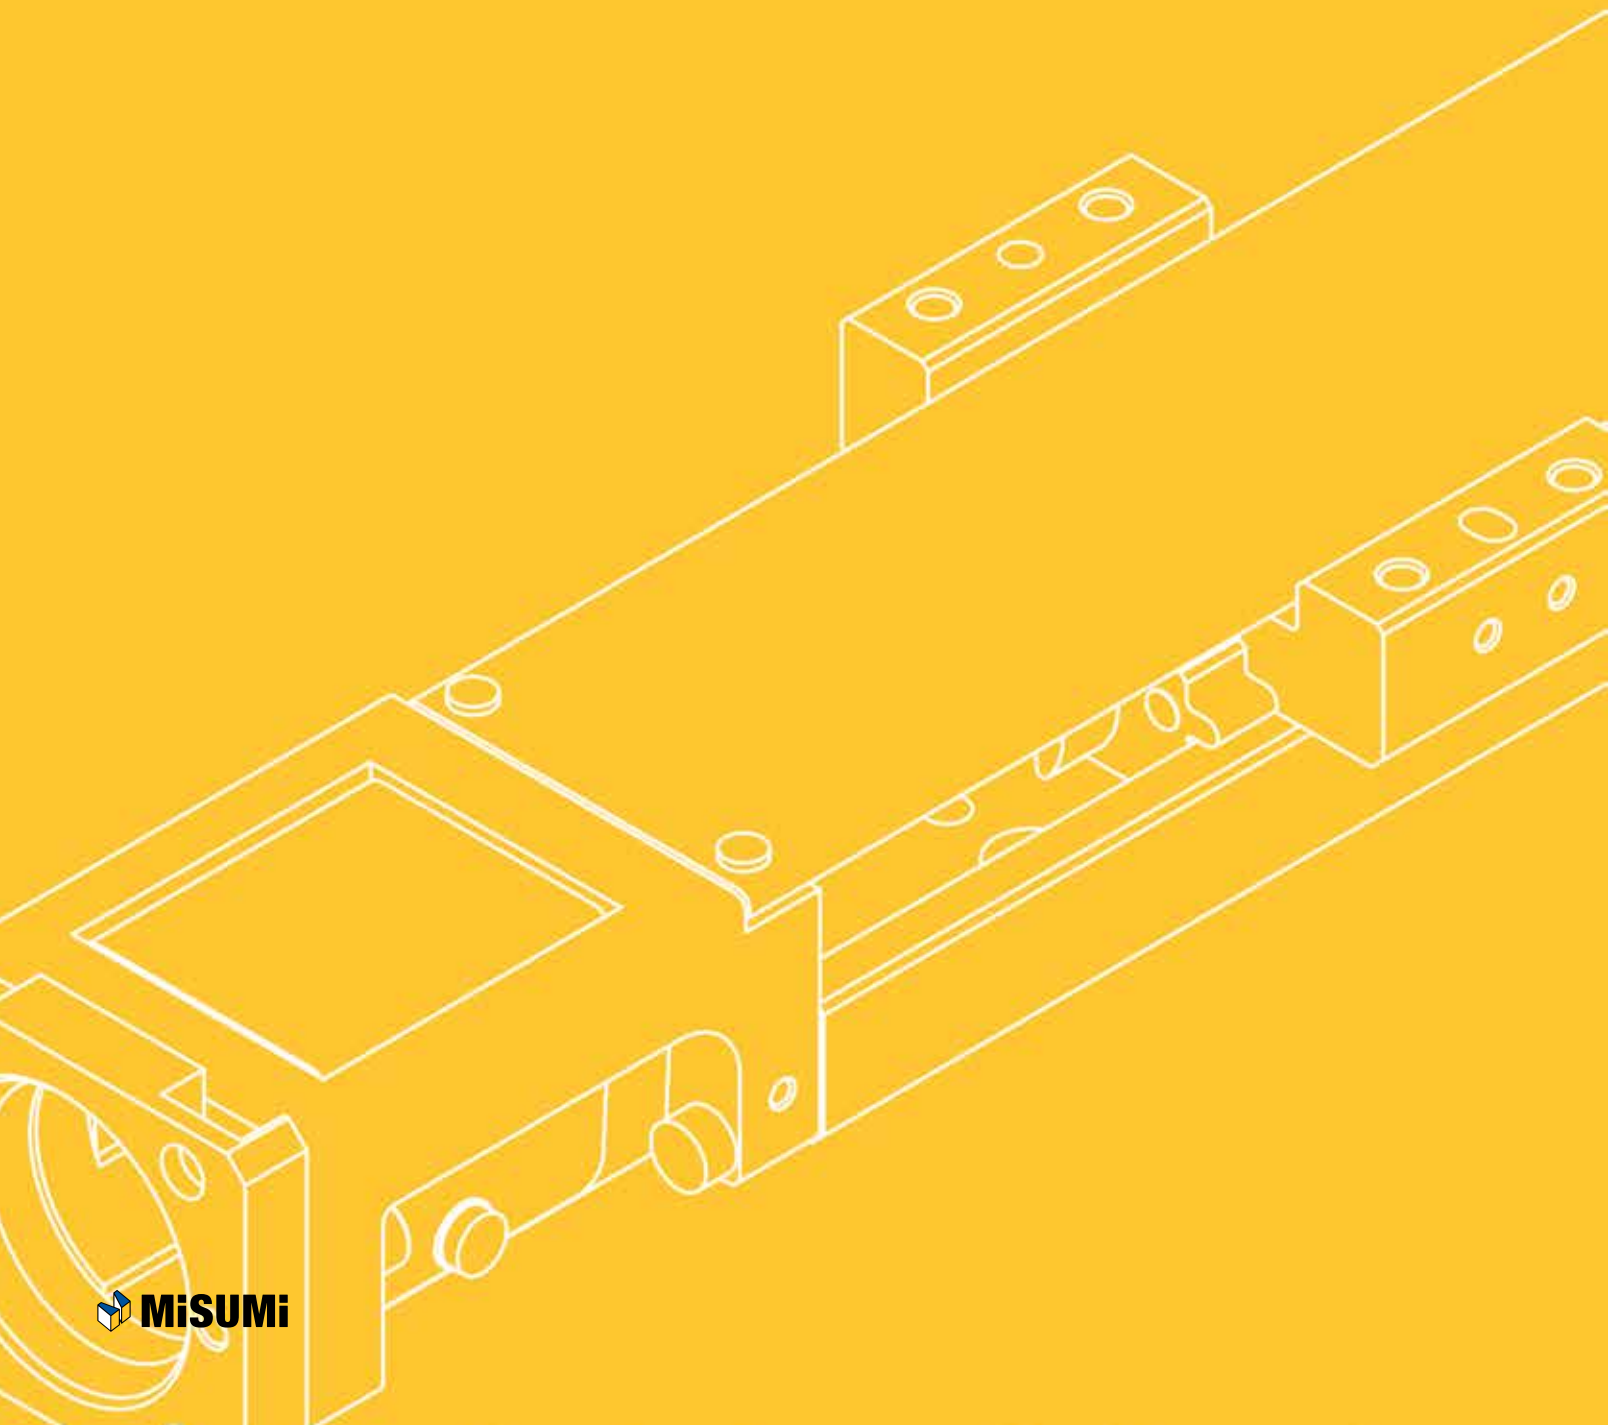



# MACHINED PARTS BY SHAPE / RESIN MATERIALS / ACTUATORS LINEUP

---

Machined Parts By Shape	<b>130-169</b>
Resin Materials	<b>170-173</b>
Actuators Lineup	<b>174-179</b>





# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	f8/g6/h5	#SFJ
	—	h9/h7/g6	#HFR
	—	h7/h6 [C]Precision	#KZAC
	—	0~-0.1	#RDOB
	—	0~-0.1 ±0.1	#RDOA
	Hardened	0~-0.005	#MRS
	Hardened	h7/g6/m6/p6 0~-0.01	#KRSD
	Hardened	h7/g6/p6	#MSY
	High Hardness Stainless Steel	h7/g6/m6/p6	#ALPS
	Hardened	h7/g6/m6/p6	#LPST
	Hardened	+0.005~+0.01	#MS
	Hardened	0~-0.005	#SFKS

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	0~-0.005	#MRSG
	Hardened	0~-0.005	#MRSG
	High Hardness Stainless Steel	0~-0.02	#SFKK
	Hardened	h7/g6/m6/p6	#LPSQ
	Hardened	0~-0.005	#MRSG
	High Hardness Stainless Steel	h7/g6/m6/p6	#ALPS
	Hardened	f8/g6/h5	#SFAQ
	Hardened	f8/g6/h5	#SFAL
	Hardened	g6	#CMG
	Hardened	f8/g6/h5	#SFAK
	Hardened	g6	#CLKG
	Hardened	g6	#CLSG



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	f8/g6/h5	#SFAR
	—	h9/h7/g6	#SFRR
	Hardened	g6	#CCG
	—	g6	#CNPR
	Hardened	g6	#SFJQ
	—	g6	#SFRV
	Hardened	g6	#CLSW
	—	h9	#SFMR
	—	g6	#SFRT
	—	h9/h7/g6	#SFGK
	—	h9/h7/g6	#SFGR
	Hardened	0~-0.01	#LPZ

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	g6	#SFDG
	—	g6	#SFR1
	Hardened	f8/g6/h5	#SFJT
	Hardened	g6 Precision	#VFJC
	—	h9/h7/g6	#HFRT
	Hardened	f8/g6/h5	#SFHC
	Hardened	g6 Precision	#VFJC
	—	h9/h7/g6	#HFRT
	—	0~-0.1	#ETK2
	Hardened	f8/g6	#SFHC
	Hardened	g6/h5	#SFLU
	High Hardness Stainless Steel	h7/g6/m6/p6	#ALPS



## Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	h7/g6/m6/p6	#LPST
	High Hardness Stainless Steel	h7/g6/m6/p6	#ALPS
	Hardened	h7/g6/m6/p6	#LPSQ
	Hardened	g6	#SFBH
	—	g6	#SFR1
	Hardened	g6	#LPN
	Hardened	+0.010~+0.005	#MSTP
	Hardened	±0.1	#JPH2
	—	h9/h7/g6	#SFGT
	Hardened	f8/g6/h5	#SFJW
	Hardened	g6 Precision	#VFJW
	—	h9/h7/g6	#HFRW

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	—	0~-0.1	#BETS
	Hardened	g6	#CLBM
	Hardened	f8/g6/h5	#SFHZ
	Hardened	g6 Precision	#VFJW
	—	h9/h7/g6	#HFRW
	—	0~-0.1	#BETS
	Hardened	f8/g6	#SFHZ
	Hardened	g6	#SFIG
	—	h9/h7/g6	#SFGW
	Hardened	f8/g6/h5	#SFAC
	—	h9/h7/g6	#HFRP
	—	h7/h6 [◎]Precision	#KZBC



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	—	g6	#SFRX
	Hardened	f8/g6/h5	#SFAA
	—	h9/h7/g6	#SFRF
	Hardened	f8/g6/h5	#SFAC
	Hardened	g6 [◎]Precision	#VFAG
	—	h9/h7/g6	#SFRG
	Hardened	f8/g6/h5	#SFPG
	Hardened	g6 [◎]Precision	#VFAG
	—	h9/h7/g6	#SFRG
	Hardened	f8/g6/h5	#SFAA
	Hardened	g6 [◎]Precision	#VFAA
	—	h9/h7/g6	#SFRA

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	f8/g6/h5	#SFUP
	Hardened	g6 [◎]Precision	#VFAA
	—	h9/h7/g6	#SFRA
	Hardened	f8/g6/h5	#SFAN
	Hardened	g6 [◎]Precision	#VFBN
	—	h9/h7/g6	#HFRN
	Hardened	f8/g6/h5	#SFAS
	Hardened	g6 [◎]Precision	#VFBN
	—	h9/h7/g6	#HFRN
	Hardened	f8/g6	#SFAS
	Hardened	f8/g6/h5	#SAFN
	Hardened	g6 [◎]Precision	#VAFN



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	—	h9/h7/g6 Alterations	#HFRN
	Hardened	f8/g6/h5	#SAFS
	Hardened	g6 [◎]Precision	#VAFN
	—	h9/h7/g6 Alterations	#HFRN
	—	0~-0.1	#ETK2
	Hardened	f8/g6	#SAFS
	Hardened	f8/g6/h5	#SFAD
	—	h9/h7/g6	#SFRD
	Hardened	g6 [◎]Precision	#VFAZ
	Hardened	f8/g6/h5	#SFAZ
	Hardened	g6 [◎]Precision	#VFAZ
	—	h9/h7/g6	#SFRD

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	f8/g6	#SFAZ
	Hardened	f8/g6/h5	#SAFD
	Hardened	g6 [◎]Precision	#VAFD
	—	h9/h7/g6 Alterations	#SFRD
	—	0~-0.1	#BETG
	Hardened	f8/g6/h5	#SAFZ
	Hardened	g6 [◎]Precision	#VAFD
	—	h9/h7/g6 Alterations	#SFRD
	—	0~-0.1	#BETG
	Hardened	f8/g6	#SAFZ
	Hardened	f8/g6/h5	#SFAF
	Hardened	g6 [◎]Precision	#VAFD



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	f8/g6/h5	#SFAY
	Hardened	g6 [◎]Precision	#VFAD
	—	0~-0.1	#ETKJ
	Hardened	f8/g6/h5	#SFAH
	—	h9/h7/g6	#HFRQ
	—	h7/h6 [◎]Precision	#KZCC
	—	g6	#SFRZ
	Hardened	f8/g6/h5	#SFAH
	Hardened	g6 [◎]Precision	#VFAH
	—	h9/h7/g6	#SFRH
	—	0~-0.1	#ETKJ
	Hardened	f8/g6/h5	#SFHU

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	g6 [◎]Precision	#VFAH
	—	h9/h7/g6	#SFRH
	—	0~-0.1	#ETKJ
	—	g6	#SFRE
	Hardened	f8/g6/h5	#SFAB
	Hardened	f8/g6/h5	#SFAB
	—	g6	#SFRB
	Hardened	f8/g6/h5	#SFAM
	Hardened	g6 [◎]Precision	#VFBM
	—	h9/h7/g6	#HFRM
	—	0~-0.1	#ETKJ
	Hardened	f8/g6/h5	#SFAU



## Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	g6 [◎]Precision	#VFBM
	—	h9/h7/g6	#HFRM
	—	0~-0.1	#ETKJ
	Hardened	f8/g6	#SFAU
	Hardened	f8/g6/h5	#SAFM
	Hardened	g6 [◎]Precision	#VAFM
	—	h9/h7/g6 Alterations	#HFRM
	—	0~-0.1 Alterations	#ETKH
	Hardened	g6	#CLBN
	Hardened	f8/g6/h5	#SAFU
	Hardened	g6 [◎]Precision	#VAFM
	—	h9/h7/g6 Alterations	#HFRM

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	—	0~-0.1 Alterations	#ETKH
	Hardened	f8/g6	#SAFU
	—	h7/h6 [◎]Precision	#KZDC
	—	g6	#SFRJ
	Hardened	f8/g6/h5	#SAFA
	Hardened	g6 [◎]Precision	#VFAD
	—	h6 [◎]Precision	#KZEC
	—	hg6 [◎]Precision	#KZFC
	Hardened	g6	#SPJ
	—	g6	#PFR
	Welded Tube	—	#PIPA
	—	0~-0.05	#SPLS





# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	—	±0.01	#SPLN
	—	h8	#PSTS
	Hardened	g6	#SPJ
	—	h8	#PSTT
	Hardened	g6	#SPJ
	Hardened	g6	#SPJN
	Hardened	g6	#SPJN
	—	h8	#PSTT
	Hardened	g6	#SPJN
	Hardened	g6	#SPJN
	—	h8	#PSTN
	Hardened	g6	#SPJM

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	h8	#PSTN
	Hardened	g6	#SPJD
	Hardened	g6	#SPJG
	Hardened	g6	#SPJQ
	Hardened	g6	#SPJA
	Hardened	g6	#STA
	—	—	#RDRA
	—	—	#LSMN
	Small Dia.	—	#SLCB
	—	—	#LSBF
	Right/Left-Hand Thread	—	#LBMB
	—	—	#LSMN



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	—	—	#LSBG
	—	—	#LSBH
	Right/Left-Hand Thread	—	#LBGF
	Coarse/Fine Thread	—	#FJEB
	Coarse/Fine Thread	—	#SAA
	—	—	#LSBJ
	Right/Left-Hand Thread	—	#LBRB
	—	—	#LSBH
	Right/Left-Hand Thread	—	#LBRB
	—	—	#LSBJ
	—	—	#LSBJ
	—	g6	#SRPA

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	—	g6	#SRPA
	—	—	#SRPA
	—	—	#JPRM
	Hardened	g6	#HCMG
	Hardened	g6	#HCCG
	Hardened	g6	#CLBD
	Hardened	g6	#CLBR
	Hardened	g6	#HCLB
	Hardened	g6	#CLB2
	Hardened	g6	#HCLS
	—	g6	#FXHA
	—	g6	#FXHB



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	—	g6	#FXHC
	—	g6	#FXJA
	—	g6	#FXJB
	—	g6	#FXJC
	—	g6	#LXHA
	—	g6	#LXHB
	—	g6	#LXHC
	—	g6	#FXEA
	—	g6	#FXEB
	—	g6	#FXFC
	—	—	#MASA
	—	—	#FLPA

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	—	g6	#FXEA
	—	g6	#FXEB
	Hardened	m6	#STMH
	Hardened, Urethane	m6	#USTM
	Hardened	g6	#CBD
	Hardened	g6	#CBD
	Hardened	g6	#CBD
	Hardened	±0.1	#JPHF
	—	g6	#CBD
	Hardened	—	#JPRA
	Hardened	—	#SSTE
	Hardened	—	#BSTE



## Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	—	#SSTH
	Hardened, Urethane	—	#USTH
	Hardened	g6	#MSG
	High Hardness Stainless Steel	-0.01~-0.03	#AFPS
	—	-0.01~-0.03	#FPSA
	—	-0.01~-0.03	#FPQS
	Hardened	g6/m6/p6	#JPRS
	Hardened	m6/p6	#FPDS
	High Hardness Stainless Steel	0~-0.01	#SFSK
	Hardened	h7/g6/m6/p6	#SFNN
	—	-0.1~-0.2	#SFSZ
	High Hardness Stainless Steel	g6/m6/p6	#AFPS

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	g6	#FPST
	Hardened	g6	#FPQ2
	Hardened	g6	#JPRS
	Hardened	g6	#FPD2
	Hardened	±0.1	#SDPA
	—	g6	#FXAA
	—	g6	#FXCA
	—	g6	#FXAB
	—	g6	#FXCB
	—	g6	#FXAC
	—	g6	#FXCC
	—	g6	#FXBA



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	—	g6	#FXDA
	—	g6	#FXBB
	—	g6	#FXDB
	—	g6	#FXBC
	—	g6	#FXDC
	—	g6	#FXMA
	—	g6	#FXMB
	—	g6	#LXAA
	—	g6	#LXCA
	—	g6	#FXKA
	—	g6	#FXKB
	—	g6	#LXAB

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	—	g6	#LXCB
	—	g6	#FXKA
	—	g6	#FXKB
	—	g6	#LXAC
	—	g6	#LXCC
	Hardened	m6	#FPJA
	Hardened	±0.1	#SHFJ
	Hardened	g6	#FPUA
	Hardened	h7	#ELAB
	Hardened	g6	#FPTN
	Hardened	0~-0.005	#SFPN
	Hardened	h7	#SELA



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	h7	#ELAN
	Hardened	h7	#HATA
	Hardened	0~-0.2	#JPHA
	Hardened	h7	#SELT
	Hardened	h7	#ELAT
	Hardened	h7	#ELAC
	High Hardness Stainless Steel	m6/p6	#AFPB
	Hardened	g6/m6/p6	#FPBA
	Hardened, MC Nylon	m6/p6	#JPPH
	High Hardness Stainless Steel	m6/p6	#AFPQ
	Hardened	g6/m6/p6	#FPQA
	Hardened	m6/p6	#JPRB

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	High Hardness Stainless Steel	m6/p6	#AFPD
	Hardened	m6/p6	#FPDC
	Hardened	g6/m6/p6	#WPG
	Hardened	g6/m6	#SHFJ
	High Hardness Stainless Steel	m6/p6	#AFPB
	Hardened	g6	#FPBT
	Hardened	h7	#ELNB
	Hardened, MC Nylon	g6/m6/p6	#JPPH
	High Hardness Stainless Steel	m6/p6	#AFPQ
	Hardened	g6/m6/p6	#FPQT
	Hardened	m6/p6	#JPRB
	Hardened	g6/+0.012~-+0.007	#HPSF



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	High Hardness Stainless Steel	m6/p6	#AFPD
	Hardened	m6/p6	#FPDT
	Hardened	g6/m6/p6	#WPG
	Hardened	g6/m6	#SDPA
	High Hardness Stainless Steel	m6/p6	#AFPB
	Hardened	g6	#FPNA
	Hardened	0~-0.1	#JPNG
	Hardened	h7	#SELN
	Hardened	h7	#ELNN
	Hardened, MC Nylon	g6/m6/p6	#JPPH
	Hardened	m6/p6	#FPNS
	Hardened	g6	#LPN

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	High Hardness Stainless Steel	g6/m6/p6	#AFPQ
	Hardened	g6	#FPQN
	Hardened	g6/m6/p6	#JPRB
	Hardened	h7	#HNTA
	High Hardness Stainless Steel	g6/m6/p6	#AFPD
	Hardened	g6	#FPFN
	Hardened	g6	#JPLR
	Hardened	g6	#JPLB
	Hardened	±0.1	#SPFA
	Hardened	±0.1	#SDPA
	Hardened	g6	#FPTM
	Hardened	g6	#JPMA



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	g6	#JPEA
	Hardened	h7	#SEL4
	Hardened	h7	#ELNT
	Hardened	h7	#ELNC
	Hardened	g6/0~-0.02	#KJPS
	Hardened	g6/0~-0.02	#KJPS
	Hardened	—	#KJ02
	Hardened	g6/0~-0.02	#KJPD
	Hardened	g6/0~-0.02	#KJPD
	Hardened	g6/0~-0.02	#KJPM
	Hardened	g6/0~-0.02	#KJPM
	Hardened	g6/0~-0.02	#KJPL

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	g6/0~-0.02	#KJPM
	Hardened	g6/0~-0.02	#KJPM
	Hardened	g6/0~-0.02	#KJPV
	Hardened	g6/0~-0.02	#KJPV
	Hardened	g6/0~-0.02	#KJPV
	Hardened	g6/0~-0.02	#KJPV
	Hardened	g6/0~-0.02	#KJPH
	Hardened	g6/0~-0.02	#KJPH
	Hardened	g6/0~-0.02	#KJPH
	Hardened	g6/0~-0.02	#KJPH
	Hardened	g6/0~-0.02	#KJPH
	Hardened	g6/0~-0.02	#KJPH





# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	g6/0~-0.02	#KJPH
	Hardened	g6/0~-0.02	#KJPH
	Hardened	g6/0~-0.02	#KJPH
	Hardened	g6/0~-0.02	#KJP1
	Hardened	g6/0~-0.02	#KJP1
	Hardened	g6/0~-0.02	#KJP3
	Hardened	g6/0~-0.02	#KJP3
	Hardened	g6/0~-0.02	#KJP1
	Hardened	g6/0~-0.02	#KJP1
	Hardened	g6/0~-0.02	#KJP3
	Hardened	g6/0~-0.02	#KJP3
	Hardened	g6/0~-0.02	#KJP4

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	g6/0~-0.02	#KJP4
	Hardened	g6/0~-0.02	#KJP9
	Hardened	g6/0~-0.02	#KJP9
	Hardened	g6/0~-0.02	#KJP6
	Hardened	g6/0~-0.02	#KJP6
	Hardened	g6/0~-0.02	#KJP6
	Hardened	g6/0~-0.02	#KJP6
	Hardened	g6	#KJPK
	Hardened	g6	#KJPC
	Hardened	g6	#KJPC
	Hardened	g6	#KJPT
	Hardened	g6	#KJPT



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Plate Thickness Selectable	Plate Thickness Tolerance: $\pm 0.1$	#WSSB
	Plate Thickness Configurable	Plate Thickness Tolerance: $\pm 0.01$	#WASB
	Hardened, Plate Thickness Selectable	Plate Thickness Tolerance: $\pm 0.01$	#WASH
	Dimension Configurable	Plate Thickness Tolerance: $\pm 0.1$	#FWS
	Hardened, Dimension Configurable	—	#FWAS
	Shape Selectable	Plate Thickness Tolerance: $\pm 0.1$	#KWSB
	Counterbored Hole	Counterbored Hole Tolerance: $\pm 0.1$ , Overall L Tolerance: $\pm 0.1$	#WZAB
	Slotted Hole	Plate Thickness Tolerance: $\pm 0.1$	#WLM
	Tapped Hole Dia. Selectable	T Dimension Tolerance: $\pm 0.1$	#WTAB
	Countersunk	I.D. $+0.1 \sim +0.3$	#WSRB
	With Screw Holes	I.D. $+0.1 \sim +0.3$	#WBAA
	Standard	—	#SCC

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Wide	—	#SCC
	Compact	—	#SCC
	For Bearing Mounting	—	#SCBR
	For Bearing Mounting, Compact	—	#SCBR
	2-Hole	—	#SCMN
	2-Tapped	—	#SCMN
	4-Hole	—	#SCMN
	4-Tapped	—	#SCMN
	Standard	—	#SDN
	Standard	—	#SCS
	Compact	—	#SCS
	For Bearing Mounting	—	#SCBN



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	For Bearing Mounting, Compact	—	#SCBN
	Urethane, Standard	—	#SCD
	Urethane, Compact	—	#SCD
	Threaded Inserts	—	#SCNP
	2-Hole	—	#SCSM
	2-Tapped	—	#SCSM
	Side Mount Holes	—	#SCJP
	Cylindrical	—	#SAYA
	2-Flats	—	#SCJN
	D Cut	—	#SDN
	Standard	—	#SCSP
	Compact	—	#SCSP

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Balanced	—	#SCSP
	Urethane, Standard	—	#SCD
	Urethane, Compact	—	#SCD
	with Threaded Inserts	—	#SCNP
	D Cut	—	#SDN
	Standard	—	#SCDK
	Wedge, Side Mount Holes	—	#SCWD
	Side Mount Holes	—	#SCDK
	D Cut, Wedge	—	#SCWD
	D Cut	—	#SCDK
	D Cut, Compact	—	#SCDK
	One-Touch	—	#WSC



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Cast	—	#SHFL
	Cast	Long Sleeve	#SHF
	Machined	—	#STHM
	Machined	—	#STHI
	Machined	Wide	#STH3
	Machined	—	#STH6
	Machined	—	#ATHC
	Machined	Wide	#STH1

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Machined	—	#STHC
	Machined	Wide	#STH2
	Machined	—	#STHW
	Machined	—	#STH5
	Machined	—	#STH4
	Machined	—	#STHX
	Machined	—	#STHP
	Machined	—	#ATHC



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Machined	Wide	#STH1
	Machined	—	#STHW
	Machined	—	#STHI
	Machined	Wide	#STH3
	Machined	—	#STH6
	Machined	—	#ATHC
	Machined	Wide	#STH1
	Machined	—	#STHC

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Machined	Wide	#STH2
	Machined	—	#STHW
	Machined	—	#STH5
	Machined	—	#STH4
	Machined	—	#STHX
	Machined	—	#STHP
	Machined	—	#CLSB
	Cast	—	#KLSB



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Machined	—	#KFPB
	—	—	#CSPF
	—	—	#FSBA
	—	—	#LFSB
	—	—	#ASPA
	—	—	#ABFX
	Machined	Retained	#BACA
	Machined	Retained	#BACR

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Machined	Non-Retained	#BACN
	Machined	Retained	#BGCE
	Machined	Overall L Selectable, Retained	#BACB
	Machined	Overall L Selectable, Retained	#BAFC
	Machined	Overall L Selectable, Non-Retained	#BACC
	Machined	Overall L Selectable, Non-Retained	#BAF2
	Machined	Low Dust Generation	#SSB
	Machined	—	#BGBC



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Machined	Angular Bearing	#ABGC
	Machined	Overall L Selectable, Retained	#BACZ
	Machined	Overall L Selectable, Retained	#BAFR
	Machined	Overall L Selectable, Non-Retained	#BACY
	Machined	Overall L Selectable, Non-Retained	#BAFY
	Machined	Overall L Selectable, Non-Retained	#BGFR
	Machined	—	#GBGY
	Machined	Angular Bearing	#ABGY

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Machined	Angular Bearing	#ABGE
	Machined	Retained	#BACA
	Machined	Retained	#BACR
	Machined	Retained	#BGCE
	Machined	Overall L Selectable, Retained	#BACB
	Machined	Overall L Selectable, Retained	#BAFC
	Machined	Overall L Selectable, Non-Retained	#BACC
	Machined	Overall L Selectable, Non-Retained	#BACY



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Machined	Overall L Configurable, Non-Retained	#BAFY
	Machined	Overall L Configurable, Non-Retained	#BGFR
	Machined	Overall L Configurable, Non-Retained	#BAF2
	Machined	Overall L Selectable, Retained	#BACZ
	Machined	Overall L Selectable, Retained	#BAFR
	Machined	Non-Retained	#BACN
	Machined	—	#STHI
	Machined	Non-Retained	#BGTN

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Machined	Retained	#BACA
	Machined	Retained	#BACR
	Machined	Non-Retained	#BACN
	Machined	Thrust Bearing	#BGCS
	Machined	Low Dust Generation	#SSBA
	Machined	Retained	#BGCE
	Machined	Low Dust Generation	#SSB
	—	Shoulder Thickness Tolerance: 0~-0.2, T Dimension Tolerance: 0~-0.3	#FTCB





# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	—	I.D. Tolerance: +0.1~+0.3	#TCLA
	—	—	#TCLA
	—	I.D. Tolerance: H7, O.D. Tolerance: h7	#DCLB
	Hardened	I.D. Tolerance: G6	#JBH
	Hardened, Thin Wall	I.D. Tolerance: G6	#JBHU
	Maintenance Free	I.D. Tolerance: F7	#SHFZ
	Maintenance Free, Copper	I.D. Tolerance: F7	#MPFZ
	Hardened	I.D. Tolerance: H8	#LCB
	Maintenance Free	I.D. Tolerance: H8	#LCB
	Maintenance Free	Thin Wall, I.D. Tolerance: F7	#MDZB
	Hardened Products Available	I.D. Tolerance: 0~+0.01	#JBT
	Hardened Products Available	I.D. Tolerance: 0~+0.01	#JBT

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Hardened	I.D. Tolerance: H7 / +0.01~+0.03	#KJBD
	Hardened	I.D. Tolerance: H7 / +0.01~+0.03	#KJBM
	Hardened	I.D. Tolerance: H7 / +0.01~+0.03	#KJBW
	Hardened Products Available	I.D. Tolerance: H7 / +0.01~+0.03	#KJBK
	Hardened Products Available	I.D. Tolerance: H7 / +0.01~+0.03	#JBE
	Hardened Products Available	I.D. Tolerance: H7 / +0.01~+0.03	#KJB4
	Hardened Products Available	I.D. Tolerance: H7 / +0.01~+0.03	#KJB3
	Hardened Products Available	I.D. Tolerance: 0~+0.01	#JBN
	Hardened Products Available	I.D. Tolerance: H7	#JBEH
	Hardened Products Available	I.D. Tolerance: 0~+0.01	#JBS
	—	Overall L Tolerance: ±0.2	#SGP
	Spacer	—	#SMKB



## Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE 1	FEATURE 2	WEB CODE
	Simultaneous Grinding	Overall L Tolerance: $\pm 0.05$	#DWSS
	Overall L Selectable	I.D. Tolerance: $+0.3 \sim +0.1$ , Overall L Tolerance: $0 \sim -0.1$	#AASC
	Overall L Selectable	I.D. Tolerance: $+0.3 \sim +0.1$ , Overall L Tolerance: $0 \sim -0.1$	#AASC
	Dimension Configurable	I.D. Tolerance: $+0.3 \sim +0.1$ , Overall L Tolerance: $0 \sim -0.1$	#FAC
	Hardened	I.D. Tolerance: $+0.3 \sim +0.1$ , Overall L Tolerance: $0 \sim -0.1$	#ASC
	Thin-Walled	—	#TASC
	Hardened	I.D. Tolerance: G6	#JBA
	Hardened Products Available, Thin Wall	I.D. Tolerance: G6	#JBAU
	—	Screw Hole	#KJBN
	Maintenance Free	I.D. Tolerance: F7	#SHBR
	Maintenance Free, Thin Wall	I.D. Tolerance: F7	#MDZB
	Hardened	I.D. Tolerance: H8	#LCB

SHAPE	FEATURE	WEB CODE	WEB CODE
	Maintenance Free	I.D. Tolerance: H8	#LCB
	Maintenance Free	I.D. Tolerance: F7	#MPBZ
	Hardened	I.D. Tolerance: H7 / $+0.01 \sim +0.03$	#KJBD
	Hardened	I.D. Tolerance: H7 / $+0.01 \sim +0.03$	#KJBM
	Hardened	I.D. Tolerance: H7 / $+0.01 \sim +0.03$	#KJBW
	Hardened	I.D. Tolerance: H7 / $+0.01 \sim +0.03$	#KJBK
	Hardened	I.D. Tolerance: H7 / $+0.01 \sim +0.03$	#KJB4
	Hardened	I.D. Tolerance: H7 / $+0.01 \sim +0.03$	#KJB4
	Hardened	I.D. Tolerance: H7 / $+0.01 \sim +0.03$	#KJB3
	Hardened	I.D. Tolerance: H7 / $+0.01 \sim +0.03$	#KJB3



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE	SHAPE	FEATURE	WEB CODE
	Machined	#KED		Machined	#JNPB
	Machined	#KED		Machined	#HRCZ
	Machined	#KED		Sheet Metal	#JSAA
	Machined	#HRCA		Machined	#LNDB
	Sheet Metal	#JTAA		Machined	#LNDB
	Machined	#FSWS		Machined	#PCW
	Machined	#HPE		Machined	#FSWS
	Machined	#LNCB		Machined	#SBFB



## Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE
	Machined	#LN DL
	Machined	#WG TB
	Machined	#GIR H
	Machined, Oil-Free Bushing Press-Fit	#LN MS
	Machined, Oil-Free Bushing Press-Fit	#LN MS
	Machined, with Built-in Bearing	#LN BB
	Machined, with Built-in Bearing	#LN BB
	Machined	#AJ SB

SHAPE	FEATURE	WEB CODE
	Machined	#HP AN
	Machined	#LN FT
	Machined	#AJ FN
	Machined	#LK BK
	Sheet Metal	#JS AA
	Machined	#HR CZ
	Machined	#HR CZ
	Sheet Metal	#JS AA



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE	SHAPE	FEATURE	WEB CODE
	Machined	#BLHB		Machined	#BLHB
	Machined	#SBHB		Machined	#TSB
	Machined	#SBHB		Machined	#TABB
	Machined, Urethane	#SBUB		Machined	#AJSN
	Machined	#WGHA		Machined	#AJWB
	Machined	#SBNB		Machined	#SHQB
	Machined	#SBNB		Machined	#SHBM
	Machined	#AJKB		Machined	#SHB2



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE
	Machined	#SHM3
	Machined	#SHMT
	Machined	#SHYA
	Machined	#SHSB
	Machined	#SHS2
	Machined	#AMN
	Machined	#AMNC
	Machined	#SAQB

SHAPE	FEATURE	WEB CODE
	Machined	#SAQB
	Machined	#AMNC
	Machined	#AQL
	Machined	#SHUA
	Machined	#SHSW
	Machined	#SHMW
	Machined	#SHMP
	Machined	#SHM2



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE	SHAPE	FEATURE	WEB CODE
	Machined	#SHZA		Machined	#AMNQ
	Machined	#SHSP		Machined	#ALKD
	Machined	#ARPP		Machined	#ALKR
	Machined	#SHSN		Machined	#ALKC
	Machined	#ARPP		Machined	#ALKL
	Machined	#SHKH		Machined	#AKP
	Machined	#SHKH		Machined	#ASBC
	Machined	#AMNQ		Machined	#ALQD



## Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE
	Machined	#ALQD
	Machined, With Bearing	#BGSM
	Machined, With Bearing	#BGSN
	Machined, With Bearing	#BGBF
	Machined, With Bearing	#BGBW
	Machined, With Bearing	#BGTK
	Machined, With Bearing	#BGTW
	Machined	#BMBN

SHAPE	FEATURE	WEB CODE
	Machined	#BTLN
	Machined	#BTAN
	Machined	#BMRF
	Machined	#BMUF
	Machined	#BMIF
	Machined	#BMAN
	Machined	#BMTF
	Machined	#BMZF





# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE
	Machined	#BMZR
	Machined	#BMZR
	Machined	#WBMB
	Machined	#WBMR
	Machined	#WBMU
	Machined	#BMSW
	Machined	#BMUW



## Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE
	Machined	#AJTN
	Cast	#SHT2
	Machined	#SHTA
	Machined	#SHTB
	Cast	#SSTA
	Cast	#SHA
	Machined	#SHST
	Cast	#SHAN

SHAPE	FEATURE	WEB CODE
	Machined	#SHS3
	Machined	#CLPK
	Machined	#CLNA
	Cast	#CLPB
	Machined	#CLTQ
	Machined	#CLQB
	Machined	#SHS4
	Cast	#SHTC



# Machined Parts By Shape









Find machined parts based on shapes






SHAPE	FEATURE	WEB CODE	SHAPE	FEATURE	WEB CODE
	Machined	#SHWT		Machined	#HKNK
	Cast	#SHT3		Machined, Maintenance Free	#HKTB
	Machined	#SHW2		Machined	#HGHH
	Machined	#SHHT		Machined	#HGB2
	Cast	#SHTD		Machined	#HKSB
	Machined	#SHPT		Machined	#HGCC
	Cast	#SHT4		Machined	#HGCN
	Machined	#SHP2		Machined	#HKNB



# Machined Parts By Shape

Find machined parts based on shapes

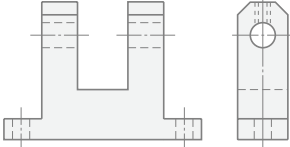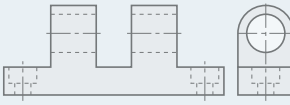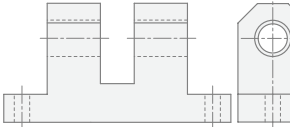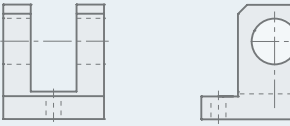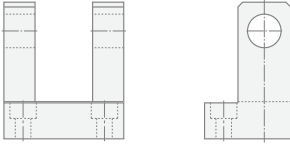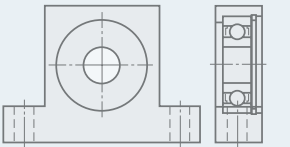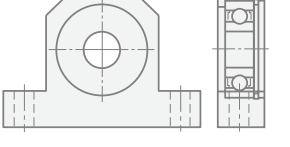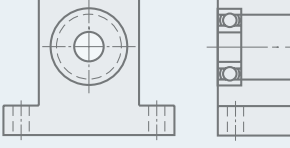SHAPE	FEATURE	WEB CODE
	Machined	#HKPB
	Machined	#HGHH
	Machined, Maintenance Free	#HGNJ
	Machined	#HGCC
	Machined	#HGCN
	With Bearing, Machined	#BGHF
	With Bearing, Machined	#BGHF
	With Bearing, Machined	#BGHW

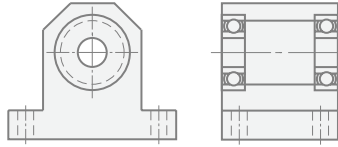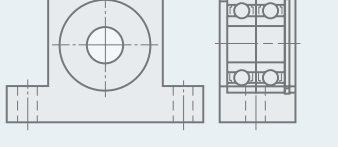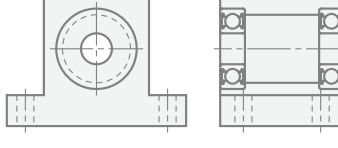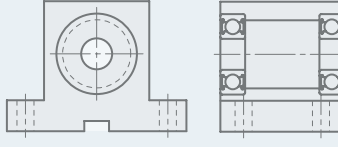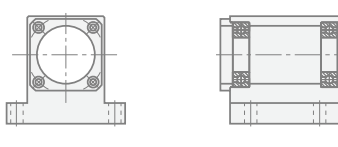SHAPE	FEATURE	WEB CODE
	With Bearing, Machined	#BGHW
	With Bearing, Machined	#BGMW
	With Bearing, Machined	#BKHW
	With Bearing, Machined	#BKHW
	With Bearing, Machined	#GBGW



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE	SHAPE	FEATURE	WEB CODE
	Machined	#WGNA		Fe-Cast	#IKD
	Cutoff Materials	#LACA		Fe-Cast	#IKD
	Cutoff Materials	#LRA		AL-Cast	#AIKD
	Machined	#LAHA		AL-Cast	#AIKD
	Machined	#LAFD		AL-Cast	#AIKD
	Machined	#LSAW		Cast	#IK
	Sheet Metal	#FACA		Cast	#IK
	Fe-Cast	#IKD		Cast, Hole Positions Configurable	#IKF



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE
	Welded	#BRWB
	Welded	#IKYS
	Cast	#RQDB
	Machined	#RBDA
	Machined	#RBBA
	Machined	#RACA
	Machined	#RBJW
	Machined	#RBJW

SHAPE	FEATURE	WEB CODE
	Sheet Metal	#FSDA
	Machined	#LRAM
	Sheet Metal	#FSDA
	Machined	#LRAM
	Sheet Metal	#FSDA
	Machined	#LRAM
	Sheet Metal	#FSDA
	Machined	#LRAM



# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE	SHAPE	FEATURE	WEB CODE
	Sheet Metal	#FSDA		Machined	#AJLC
	Machined	#LRAM		Cast	#SHKL
	Sheet Metal	#FSDA		Machined	#SHK2
	Machined	#LRAM		Cast	#SHKS
	Machined	#WGDB		Machined	#SHK3
	Machined	#AJLB		Cast	#SHKW
	Machined	#AJSL		Machined	#SHK4
	Machined	#AJLC		Machined	#SHKH



## Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE
	Cast	#SHKB
	Machined	#SHKP
	Machined	#HGLN
	Machined	#HGLN
	Machined	#AJLC
	Machined	#WGLA
	Machined	#CMAL
	Machined, With Bearing	#BGLF

SHAPE	FEATURE	WEB CODE
	Machined	#WGVA
	Machined	#VBT
	Machined	#VZB
	Machined	#VBT
	Machined	#CVTA
	Machined	#CVTB
	Machined	#CAT
	Machined	#HKUB





# Machined Parts By Shape

Find machined parts based on shapes

SHAPE	FEATURE	WEB CODE
	Machined	#HKUB
	Machined, Maintenance Free	#HKUB
	Machined	#HGSU
	Machined	#HBNT
	Machined	#HBNT
	Machined	#LACF
	Machined	#LACF
	Machined	#WGDL



## Index By Special Material

Find out what MISUMI offers for non-metal materials.

### Engineering Plastic

Material	Grade	Color Sample	Color	Properties					WEB CODE					
				Electric Properties	Continuous Use Temperature °C	Dimensional Stability	Abrasion Resistance	Sliding Properties	Plate	Round Bars	Pipes	Collars	Washer	Screw
MC Nylon®	Standard / MC901		Blue	Insulation	-40~120	0	+	+	#MCA	#RDJB	#PIJB	#CLJB	#WSJB	—
	Standard / MC900NC		Ivory	Insulation	-40~120	0	+	+	#MCA	#RDJB	#PIJB	#CLJB	#WSJB	—
	Sliding / MC703HL		Purple	Insulation	-40~120	0	++	++	#MCA	—	—	—	—	—
	High Strength / MC602ST		Dark Brown	Insulation	Room Temp. ~ 150	0	+	+	#MCA	—	—	—	—	—
	Weather Resistance / MC801		Dark Gray	Insulation	Room Temp. ~ 120	0	++	+	#MCA	—	—	—	—	—
	Conductivity MC501CDR2		Black	Conductive	Room Temp. ~ 120	0	0	+	#MCA	#RDJB	#PIJB	#CLJB	#WSJB	—
	Conductivity MC501CDR6		Black	Antistatic	Room Temp. ~ 120	0	0	+	#MCA	#RDJB	#PIJB	#CLJB	#WSJB	—
	Conductivity MC501CDR9		Black	Antistatic	Room Temp. ~ 150	0	+	+	#MCA	—	—	—	—	—
Polyacetal	Standard		White	Insulation	-45~95	+	0	+	#PAA	#RDJB	#PIJB	#CLJB	#WSJB	—
	Standard		Black	Insulation	-45~95	+	0	+	#PAA	#RDJB	#PIJB	#CLJB	#WSJB	—
	Antistatic		Ocher	Antistatic	Room Temp. ~ 80	0	+	+	#PAA	—	—	—	—	—
Bakelite	Paper Bakelite		Natural Color	Insulation	-50~100	+	--0	--0	#BLA	#RDJB	#PIJB	#CLJB	#WSJB	—
	Paper Bakelite		Black	Insulation	-50~100	+	--0	--0	#BLA	—	—	—	—	—
	Cloth Bakelite		Natural Color	Insulation	-50~100	+	--0	--0	#BLA	#RDJB	#PIJB	#CLJB	#WSJB	—
Epoxy Glass	Standard		Green	Insulation	Room Temp. ~ 155	++	--0	--0	#EPXA	#RDJB	—	#CLJB	#WSJB	—
	High Temperature		Black	Antistatic	Room Temp. ~ 260	++	--0	--0	#EPXA	—	—	—	—	—
Ultra High-Molecular-Weight Polyethylene	Standard		Milky White	Insulation	-100~80	0	++	++	#UPA	#RDJB	—	—	—	—
	Conductive		Black	Conductive	-100~80	0	+	+	#UPA	—	#PIJB	—	—	—
Fluorine	Standard		White	Insulation	-40~250	--0	+	++	#UPA	#RDJB	#PIJB	#CLJB	#WSJB	—

++ : Very Strong, + : Strong, 0 : Medium, -- : Weak



## Index By Special Material

Find out what MISUMI offers for non-metal materials.

### Engineering Plastic

Material	Grade	Color Sample	Color	Properties					WEB CODE					
				Electric Properties	Continuous Use Temperature °C	Dimensional Stability	Abrasion Resistance	Sliding Properties	Plate	Round Bars	Pipes	Collars	Washer	Screw
PEEK	Standard		Ash Brown	Insulation	-50~250	+	+	+	#PKA	#RDJB	#PLJB	#CLJB	#WSJB	#PEKB
	Sliding		Black	Insulation & Conductive Mixed: Not measurable	Room Temp. ~ 250	+	+	+	#PKA	—	—	—	—	—
	Conductive		Black	Conductive	Room Temp. ~ 250	+	+	+	#PKA	—	—	—	—	—
PPS	Standard		Natural Color	Insulation	Room Temp. ~ 190	+	0	0	#NPMS	#RDJB	#PLJB	—	—	#PEKB
	Abrasion Resistance		Blue	Antistatic	Room Temp. ~ 220	++	++	+	#NPMS	—	—	—	—	—
Unilate®	Standard		Natural Brown	Insulation	Room Temp. ~ 120	+	0	0	#YCA	—	—	—	—	—
PET	Antistatic		Black	Antistatic	Room Temp. ~ 100	++	+	+	#PYCA	—	—	—	—	—
PBT	Standard		White	Insulation	Room Temp. ~ 120	+	0	0~+	#NPBT	—	—	—	—	—
ABS	Standard		Natural Color	Insulation	Room Temp. ~ 50	++	0	0	#NABS	—	#PLJB	—	—	—

++ : Very Strong, + : Strong, 0 : Medium, - : Weak

### Ceramic

Material	Color	Properties			WEB CODE			
		Safety Operating Temperature °C	Volume Specific Resistance Ω•cm	Bending Strength MPa	Plate	Round Bars	Collars	Washer
Alumina 92 Al <sub>2</sub> O <sub>3</sub> 92%	White	Room Temp. ~ 1200	> 1014	240~340	—	—	#CERC	#CERC
Alumina 96 Al <sub>2</sub> O <sub>3</sub> 96%	White	Room Temp. ~ 1300	> 1014	300	#CEA	—	—	—
Alumina 99 Al <sub>2</sub> O <sub>3</sub> 99.7%	Natural Color	Room Temp. ~ 1500	> 1015	340	#CEMN	—	—	—
Alumina 99.5	White	Room Temp. ~ 1200	< 1014	490	—	#CERR	—	—
Steatite SiO <sub>2</sub> , MgO	White	Room Temp. ~ 1000	> 1014	120	#CEA	—	—	—
Machinable Ceramics SiO <sub>2</sub> , MgO	Natural Color	Room Temp. ~ 1000	> 1016	94	#CEA	—	—	—



## Index By Special Material

Find out what MISUMI offers for non-metal materials.

### Transparent Plastic

Material	Grade	Color	Properties		WEB CODE		
			Light Transmittance%	Operating Ambient Temperature°C	Plate	Round Bars	Pipes
PET	Standard	Transparent	87	-15~55	#PYA	—	—
	Standard	Smoke Brown	28		#PYA	—	—
	Standard	Orange	45		#PYA	—	—
	Antistatic	Transparent	77		#PYA	—	—
	Antistatic	Smoke Brown	30		#PYA	—	—
PVC	Antistatic	Transparent	80	-30~60	#ENBT	—	—
	Antistatic	Smoke Brown	29		#ENBT	—	—
Acrylic	Standard	Transparent	93	-30~80	#ACA	#RDJA	#PIJ1
	Standard	Smoke Brown	25		#ACA	—	—
	Standard	Orange	43		#ACA	—	—
	Antistatic	Transparent	79		#ACA	—	—
	Antistatic	Smoke Brown	32		#ACA	—	—
Polycarbonate	Standard	Transparent	90	-30~100	#PCTA	#RDJA	#PIJ1
	Standard	Smoke Brown	35		#PCTA	—	—
	Standard	Smoke Gray	33		#PCTA	—	—
	Antistatic	Transparent	86		#PCTA	—	—
	Antistatic	Smoke Brown	35		#PCTA	—	—
	Abrasion-Resistant	Transparent	91		#PCTA	—	—

### Glass

Material	Properties			WEB CODE
	Continuous Use Temperature °C	Max. Operation Temperature °C	Glass Strength	Plate
Quartz Glass	1000	1200	0	#FGLK
Transparent Float Glass (Soda-Lime glass)	80~100	380	0	#GLKF
Heat-resistant Glass (TEMPAX Float)	250	450	—	#GLKF
Reinforced Glass	210	250	++	#GLKF
Heat-Resistant Crystallized Glass (Nextrema)	700	850	+	#GLKF

++ : Very Strong, + : Strong, 0 : Medium, - : Weak



# Index By Special Material

Find out what MISUMI offers for non-metal materials.

## Urethane

Material	Hardness Shore A	Color	Properties				WEB CODE		
			Heat-resistant Temperature °C	Weather Resistance	Water Resistance	Oil Resistance	Sheets	Bumpers	Washer
Standard	A95	Natural Color	70	+	+	+	#UTL	#CXH	#UAFH
	A90			+	+	+	#UTL	#CXH	#UAFH
	A70			+	-	++	#UTL	#CXH	#UAFH
	A50			+	-	++	#UTL	#CXH	#UAFH
	A30			+	-	++	—	—	#UAFH
Vulkollan®	A92	Beige	80	+	-	++	#UTEX	#AAFH	#UAFH
	A68			+	-	++	#UTEX	#AAFH	#UAFH
Abrasion Resistant	A90	Dark Brown	70	+	-	++	#UTEX	#CXH	#UAFH
	A70			+	-	++	#UTEX	#CXH	#UAFH
Antistatic	A90	Gray	70	+	0	+	#LUTN	#AAFH	#UAFH
	A70			+	-	++	#LUTN	#AAFH	#UAFH
	A50			+	-	++	#LUTN	#AAFH	#UAFH
Heat Resistant	A90	Brown	120	+	+	++	#UTEX	#CXH	#UAFH
Low Rebound	A70	Gray	70	+	0	+	#LUTN	#AAFH	—
Extra Low Hardness	A15	Black	80	+	0	+	—	#CXH	—
Ceramic Urethane	A95	Gray	70	+	+	+	#UTSC	#AAFH	#UAFH
	A90			+	+	+	#UTSC	#AAFH	#UAFH
	A70			+	-	++	#UTSC	#AAFH	#UAFH
	A50			+	-	++	#UTSC	—	—

++ : Very Strong, + : Strong, 0 : Medium, - : Weak

## Rubber

Material	Hardness Shore A	Color	Properties				TYPE CODE		
			Maximum Operating Temperature °C	Continuous Use Temperature °C	Abrasion Resistance	Oil Resistance	Sheets	Bumpers	Washer
Nitrile Rubber (NBR)	A70	Black	90	80	++	+	#RBNM	#RBXA	#WRBA
	A50	Black					#RBNM	—	—
	A65	White					#RBNM	—	—
Chloroprene Rubber (CR)	A65	Black	100	80	+	0	#RBCM	#RBXA	#WRBA
	A60	Gray					#RBCM	—	—
	A60	White					#RBCM	—	—
Ethylene Rubber (EPDM)	A65	Black	120	80	0	-	#RBEW	—	#WRBA
		White					#RBEW	—	—
Butyl Rubber (IIR)	A65	Black	120	80	0	-	#RBRM	—	#WRBA
		White					#RBRM	—	#WRBA
Fluororubber (FPM)	A80	Black	230	210	++	++	#RBFM	#RBXA	#WRBA
	A60	Black					#RBFM	—	—
	A70	White					#RBFM	—	—
Silicon Rubber (SI)	A70	Light Gray	200	150	-	+	#RBAM	#RBXA	#WRBA
	A50	Milky White					#RBAM	#RBXA	#WRBA
	A50	Ivory					#RBAM	—	—
Low Elasticity Rubber (Hanenaito®)	A57	Black	60	30	-	+	#UNLE	—	—
	A32	Black					#UNLE	#RBXA	#WRBA

++ : Very Strong, + : Strong, 0 : Medium, - : Weak

## Sponge

Material	Hardness Asker C	Color	Air Bubble	Properties			WEB CODE		
				Continuous Use Temperature °C	Abrasion Resistance	Water Resistance	Sheets	Bumpers	Washer
Polyurethane Sponge	Less than C1	Black	Continuous Cell	-10~ 70	++	0	#SGNA	—	—
Chloroprene Rubber Sponge	C25	Black	Independent Cell	-35~130	+	+	#SGNA	#ASGA	#WSEA
	C25	White					#SGNA	—	—
EPDM Sponge	C8	Black	Independent Cell	-40~130	+	+	#SGNA	#ASGA	#WSEA
NBR Sponge	C30	Black	Independent Cell	-10~140	++	+	#SGNA	—	#WSEA
Silicon Rubber Sponge	C25/C35	Orange	Independent Cell	-70~200	0	+	#SGNA	#ASGA	#WSEA
	C15	Orange					#SGNA	—	—
Fluoro Rubber	C35	Black	Independent Cell	-20~230	++	++	#SGNA	—	#WSEA
Low Elasticity Rubber Sponge (Hanenaito® Sponge)	C25	Black	Independent Cell	20~ 60	+	0	#SNPG	—	—
Antistatic Low Rebound Sponge	C27	White	Independent Cell	10~ 50	+	++	#SNPG	—	—
Low Strain Sponge (Silicone Foam)	C15	3mm Thickness: Green 6mm Thickness: White	Independent Cell	-40~150	0	++	#SNPG	—	—
Special Foam Polyurethane SOFRAS®	C11	White	Continuous Cell	10~130	++	++	#SOFR	—	—
EPT Sealer®	C5 or Less	Black	Semi-Closed Cell	20~100	-	-	#EPA	—	#WSEA

++ : Very Strong, + : Strong, 0 : Medium, - : Weak



# Product Spotlight – Actuators – Single Axis Actuators (LX Series) / Single Axis Units (KU Series)

Category View

Enter CATEGORY CODE to see category details.

## Single Axis Actuators (LX Series)


Category Code: #ACLX



Standard Type



Cover Type

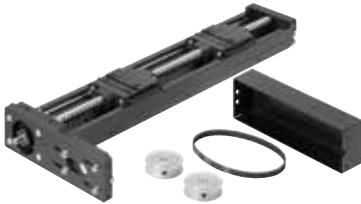

Motor Wrap Type



Motor Mounted Type



Oriental Motor  $\alpha$ -Step Cable



Motor Adapter Centering Tools

### Accessories

## Single Axis Units (KU Series)

Category Code: #ACKU




Standard Type



Cover Type

**Product View** Enter WEB CODE to see product details.

Type	Products		Positioning Repeatability (mm)	Max. Stroke (mm)	Max. Velocity (mm/sec)	Basic Dynamic Load Ratings (N)	WEB CODE
LX Series Standard/Cover Type	LX15		High Grade ±0.004	151.9	330	2072	#LX15
			Precision Grade ±0.003				
	LX20		High Grade ±0.005	236.5	694	3277	#LX20
			Precision Grade ±0.003				
	LX26		High Grade ±0.005	317	1040	6522	#LX26
			Precision Grade ±0.003				
	LX30		High Grade ±0.005	529.5	830	Long Block 9732	#LX30
			Precision Grade ±0.003			Short Block 6305	
LX45	High Grade ±0.005	497.9	1110	Long Block 18450	#LX45		
	Precision Grade ±0.003			Short Block 11826			
KU Series Standard/Cover Type	KU (Rolled BS)		±0.085 ±0.08 ±0.05 ±0.03	610	1055	—	#KUA
	KU (Precision BS)		±0.003	610	1556	—	#KUA
Motor Wrap	LXR30		±0.005	529.5	830	—	#LXR30
	LXR45		±0.005	497.9	1110	—	#LXR45

Type	Products		Positioning Repeatability (mm)	Max. Stroke (mm)	Max. Velocity (mm/sec)	Max. Horizontal Load Capacity(kg)	WEB CODE
Motor Mounted	LXM20		±0.003	130	250	15	#LXM20
	LXM26		±0.003	210	250	20	#LXM26
	LXM30		±0.003	490	450	32	#LXM30
	LXM45		±0.003	450	450	40	#LXM45



## Product Spotlight – Actuators – Single Axis Robots (RS Series)

Category View

Enter CATEGORY CODE to see category details.

### Single Axis Robots (RS Series)


Category Code: #ACRS



Slider (Straight)



Rod



Clean Spec. (Straight)



Slider (Motor Folded)



Rod with Support Guide

### Stepping Motor Type



Ball Screw (Straight)



Belt Driven



Ball Screw (Straight / Width Compact)



Clean Spec. (Straight)

### Servo Motor Type




I/O Cable



Handy Terminal



Controller



Connectors



Cables

### Accessories





**Product View** Enter WEB CODE to see product details.

**Stepping Motor Type**

Type	Motor Position	Products	Positioning Repeatability (mm)	Max. Stroke (mm)	Max. Velocity (mm/sec)	Max. Load Capacity (kg)		Max. Push Force (N)	WEB CODE
						Horizontal	Vertical		
Slider	Straight		±0.02	400	600	6	4	150	#RS1
			±0.02	800	1000	10	2	90	#RS2
			±0.02	800	1000	12	4	120	#RS3
	Motor Folded		±0.02	400	600	6	4	150	#RS1R
			±0.02	800	1000	10	2	90	#RS2R
			±0.02	800	1000	12	4	120	#RS3R
Rod	Straight & Motor Folded		±0.02	200	500	20	8	100	#RSD1
			±0.02	300	500	45	25	600	#RSD2
			±0.02	300	300	60	30	900	#RSD3
Rod with Support Guide	Straight & Motor Folded		±0.02	200	500	20	7.5	100	#RSDG1
			±0.02	300	500	45	24	600	#RSDG2
			±0.02	300	300	60	28.5	900	#RSDG3
Clean Spec.	Straight		±0.02	400	600	6	4	150	#RS1C
			±0.02	800	1000	10	2	90	#RS2C
			±0.02	800	1000	12	4	120	#RS3C

**Servo Motor Type**

Type	Motor Position	Products	Positioning Repeatability (mm)	Max. Stroke (mm)	Max. Velocity (mm/sec)	Max. Load Capacity (kg)		Rated Force (N)	WEB CODE
						Horizontal	Vertical		
Ball Screw	Straight		±0.02	800	1200	40	8	283	#RSH1
			±0.01	1050	1800	50	16	339	#RSH2
			±0.01	1050	1200	80	—	339	#RSH3
			±0.01	1050	1800	60	20	399	#RSH4
			±0.01	1050	1800	80	20	399	#RSH5
	±0.01	1050	1800	80	20	399	#RSF4		
Belt Driven	6-Mounting Positions		±0.04	2550	1875	10	—	—	#RSB1
			±0.04	3050	1875	20	—	—	#RSB2
Clean Spec.	Straight		±0.02	800	1000	40	8	283	#RSH1C
			±0.01	1050	1000	50	16	339	#RSH2C
			±0.01	1050	1000	80	—	339	#RSH3C



# Product Spotlight – Actuators – Motorized Stages

Category View

Enter CATEGORY CODE to see category details.

## Linear / X-Axis

Category Code: #ACX


On Request



## Linear / XY-Axis

Category Code: #ACXY

On Request

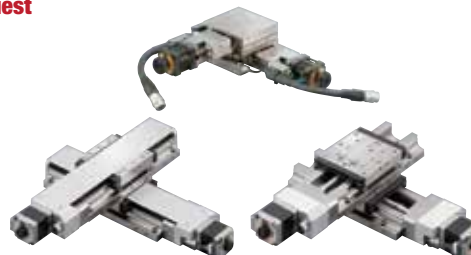

## Linear / Z-Axis

Category Code: #ACZ

On Request



## Rotary

Category Code: #ACRT

On Request



## Goniometer

Category Code: #ACGN

On Request



## Cables

Category Code: #ACCB

On Request



## Control Parts

Category Code: #ACCP

On Request











DC24V Input Driver

On Request Contact MISUMI for details

**Product View** Enter WEB CODE to see product details.








**Linear**

**On Request**

Type	Products	Positioning Repeatability (mm)	Max. Stroke (mm)	Max. Velocity (mm/sec)	Load Capacity (N)	WEB CODE
X-AXIS		±0.0005 or Less	50	10	98	#XMSG
		±0.0005	75	35	117.6	#XCVL30
		±0.0005	300	45	117.6	#XCVL100
XY-AXIS		±0.0005 or Less	15	10	93.1	#XYMSG
		±0.0005	75	35	98	#XYCVL
Z-AXIS		±0.0005 or Less	15	10	49	#ZMSG
		±0.0005	75	20	68.6	#ZCVL
		±0.0005 or Less	12	≒ 3.7	196	#ZLMPG



**Rotary**

**On Request**


Motion Image	Products	Positioning Repeatability (°)	Max. Stroke (°)	Max. Velocity (°/sec)	Max. Horizontal Load Capacity (N)	WEB CODE
		±0.003 or Less	±8.5	102	58.8	#RMBG
		±0.01 or Less	±360	30	29.4	#RMPG
		±0.005 or Less	±360	25	294	#RMWG
		—	±360	72	9.8	#RMDG

**Goniometer**

**On Request**

Type	Moving Mechanism	Stage Surface Size	Products	Positioning Repeatability (°)	Max. Stroke (°)	Max. Velocity (°/sec)	Max. Horizontal Load Capacity (N)	Rotation Center (mm)	WEB CODE
Single Axis	Worm Gear	40x40		±0.005 or Less	±8	15	29.4	40 · 60	#GMPG40
		50x50		±0.005 or Less	±10	7.8	29.4	50 · 68 · 86	#GMPG50
		60x60		±0.003 or Less	±10	22.5	49	50 · 75 · 100 · 125	#GMPG40
	Ball Screw	70x70		±0.003 or Less	±9	7.6	49	70 · 96 · 122	#GMPG50
		±0.003 or Less	±5	23	49	70 · 96 · 122	#GMPBG70		
2-Axis	Worm Gear	40x40		±0.005 or Less	±8/±6	15	24.5	40	#GMPG40
		50x50		±0.005 or Less	±10/±8	7.8	22.5	50 · 68	#GMPG50
		60x60		±0.005 or Less	±10/±8	22.5	44.1	50 · 75 · 100	#GMPG40
		70x70		±0.003 or Less	±9/±7	7.6	39.2	70 · 96	#GMPG50
	Ball Screw			±0.003 or Less	±5/±4	23	39.2	70 · 96	#GMPBG70

**MISUMI USA'S IDEA NOTE** is an online application library with more than 300 application examples for the automotive, semiconductor, packaging, medical/ pharmaceutical and 3D printing industries. You can get full BOMs, download 3D CAD models, and more!

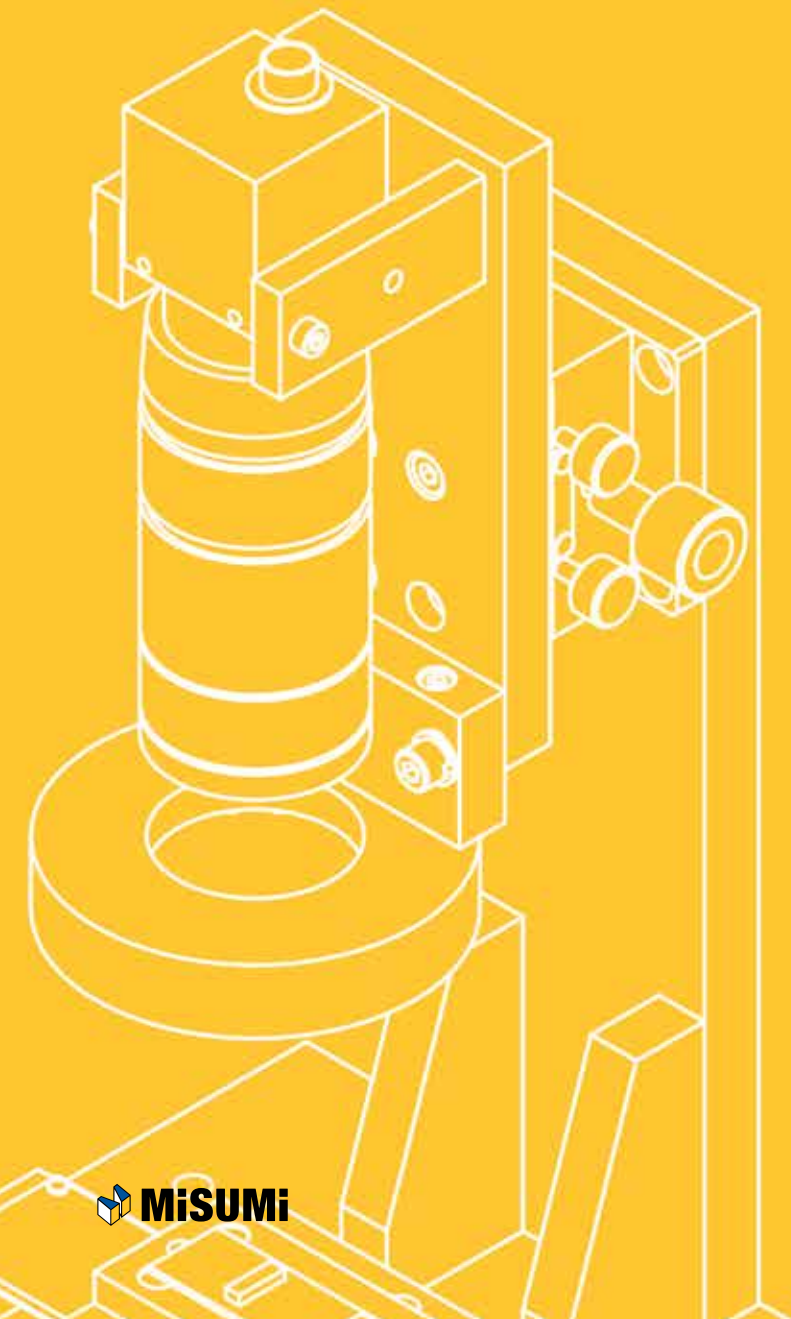

---

Transfer / Moving	<b>182-183</b>
Feed / Discharge	<b>184-185</b>
Ejection / Collection	<b>186-187</b>
Positioning / Clamp	<b>188-189</b>
Assembly / Machining	<b>190-191</b>
Inspection / Measurement	<b>192-193</b>
Drive	<b>194-195</b>
Workpiece Treatment	<b>196-199</b>
Positioning / Clamping	<b>200-201</b>
Human and Workpiece Safety	<b>202-203</b>






## Application Example

### Transfer / Moving

#IN141

### Long Workpiece Retention Mechanism

Lengthy workpiece held together by spring mechanism

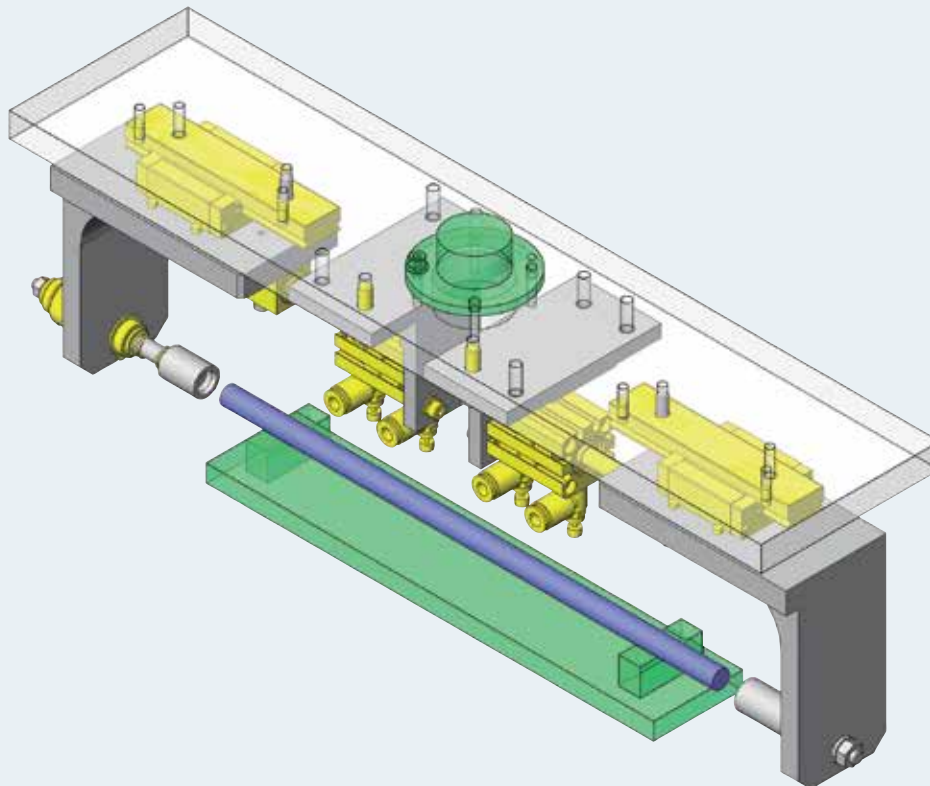

### MISUMI Part List

No.	Part Name	MISUMI Part Number	Qty
1	Miniature Linear Guides Standard Blocks	SSEB20-100	2
2	Compact Cylinders	MSCCA16-20	2
3	Sensors – For Cylinders, Grippers	MD11L1	4
4	Flow Rate Control Valves	SPJNLS6-M5-B	4
5	Floating Connectors	FJXLS6-1.0	2
6	Round Wire Springs	WT10-20	1
7	Linear Bushings – Single Type	SLMUW8G	1
8	Retaining Rings – External, C-Type	STWN15	2
9	Collars (Standard/Precision Class)	FAMSC-V15-D19-L22.9	1
10	Metal Washers (Standard Class)	WSSM12-5-3	1
11	Metal Washers (Standard Class)	WSSM12-8-2	1
12	Dowel Pins Straight Type	MS4-10	8
13	Socket Head Cap Screws	SCBS4-16	8
14	Socket Head Cap Screws	SCBS6-20	8

### Application Overview

#### Purpose

- Secure and release lengthy workpieces without causing deformation.

#### Points for Use

- Cylinder employing automatic mechanism
- Workpiece is transferred and release to operation.

#### Target Workpiece


- Outer Dimensions:  $\varnothing 10 \times 275$
- Material: POM
- Weight: 30 g



#IN35

### Cylinder Linear Motion Mechanism


Table slide with stroke end adjustment

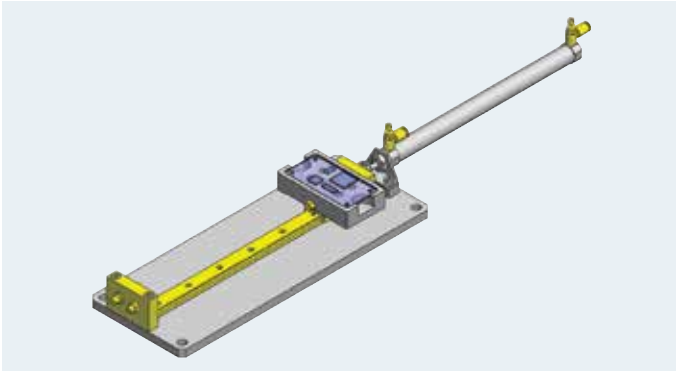

#IN32

### Pick and Place Mechanism with Ball Spline


Compact design utilizing ball spline

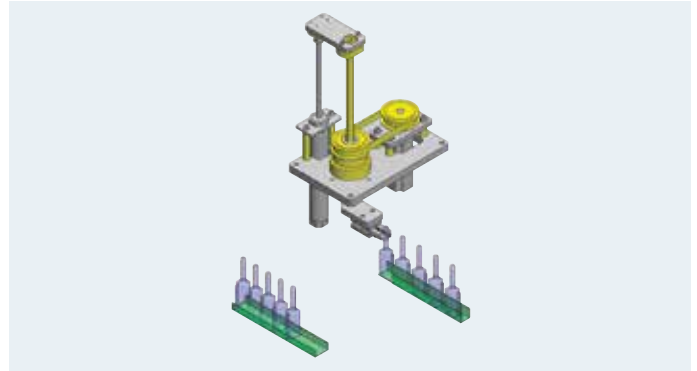

#IN40

### Non-Contact Drive Transfer Mechanism


A non-contact drive transfer mechanism with TM Magnets

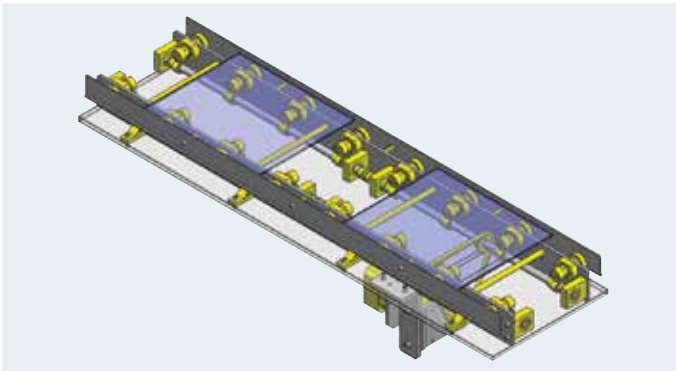

#IN75

### Workpiece Inversion and Transfer Mechanism


Motor and gear system rotates the arm and gripper simultaneously

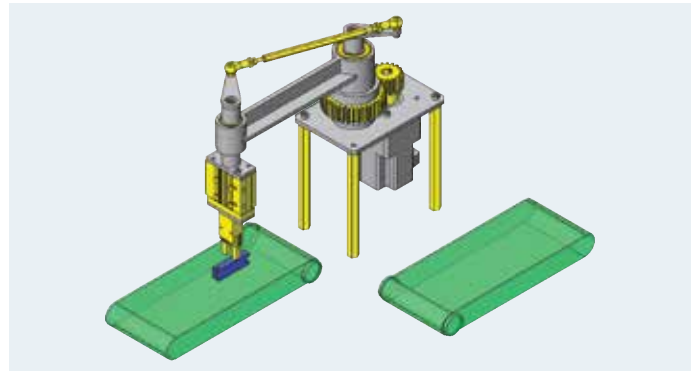

#IN20

### Rotating Gripper Unit


Using MISUMI standard components eliminates the need for custom parts

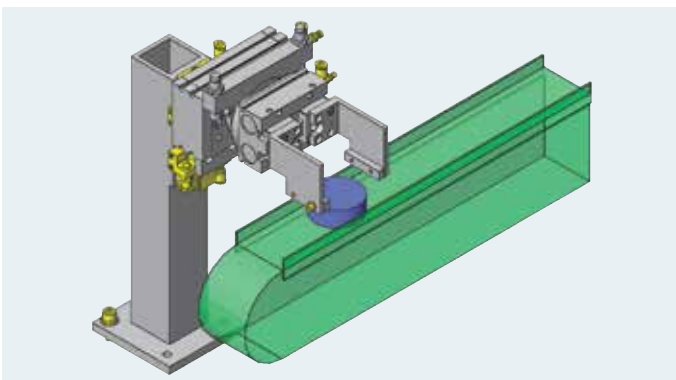

#IN38

### Positioning and Stopper Mechanism for Pallet Transfer

Stopper + lifter positioning mechanism

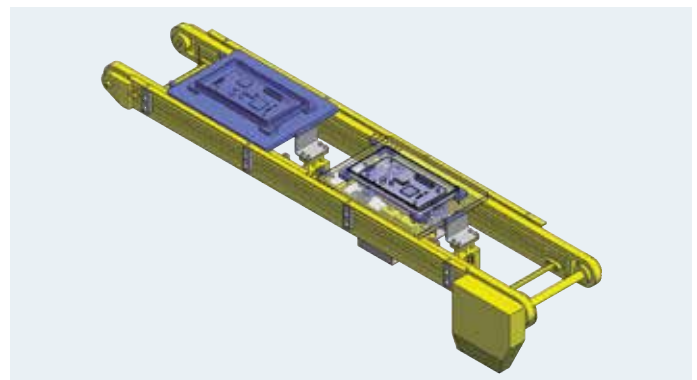




## Application Example

### Feed / Discharge

#IN169

### Workpiece Input / Discharge

Mechanism that moves radially aligned workpieces to necessary positions one by one

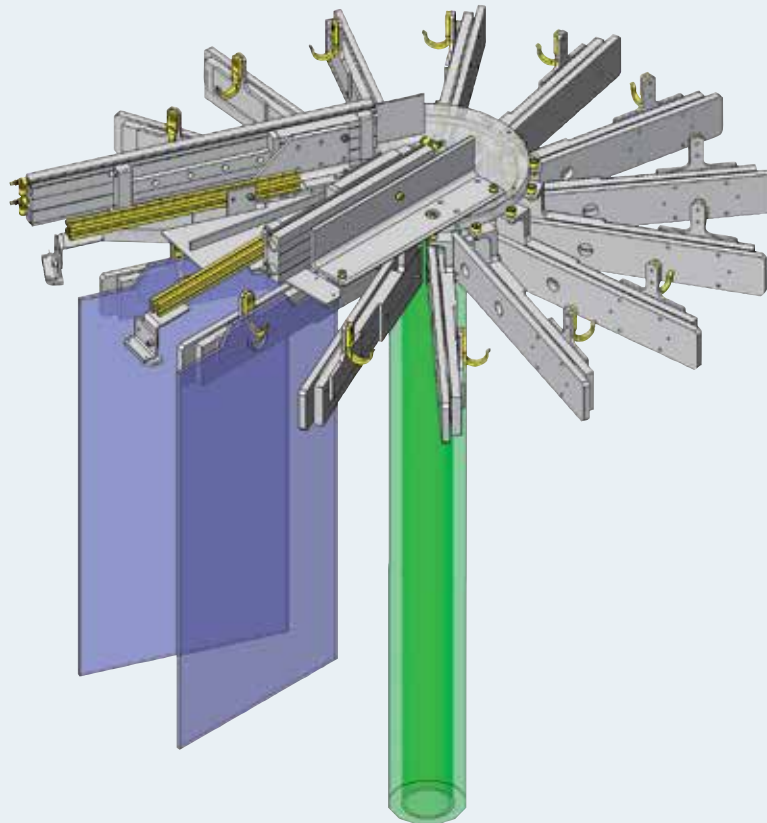

### MISUMI Part List

No.	Part Name	MISUMI Part Number	Qty
1	Aluminum Frames	NFS5-2020-330	2
2	Pre-Assembly Insertion Short Nuts	HNTT5-5	12
3	Cam Followers – Flat Type, No Seal	CFR5-13	30
4	Hooks	HKKJ	15
5	Flow Rate Control Valves	SPSNL6-M5	4
6	Socket Head Cap Screws	SCBZ6-16	19
7	Socket Head Cap Screws	SCBZ5-10	7
8	Socket Head Cap Screws	SCBZ5-12	5
9	Socket Head Cap Screws	SCBZ3-8	8
10	Socket Head Cap Screws	SCBZ5-20	30
11	Cross Recessed Flat Head Machine Screws	SFBJ5-10	30
12	Socket Head Cap Screws	SCBZ5-15	4
13	Socket Head Cap Screws	SCBZ4-12	60

### Application Overview

#### Purpose

- Device in which workpieces are stored radially with their positions retained by the cam followers and retaining rails and necessary workpieces are moved in rotation to the supply and discharge position for input and output of the workpieces. Structure in which the retaining rails are disconnected at the input/output position and the cam followers come off the retaining rails to move to the movable rails.






#IN50

### Adjustment of Angle at Offset Center Point


Adjustment of angle at offset center point

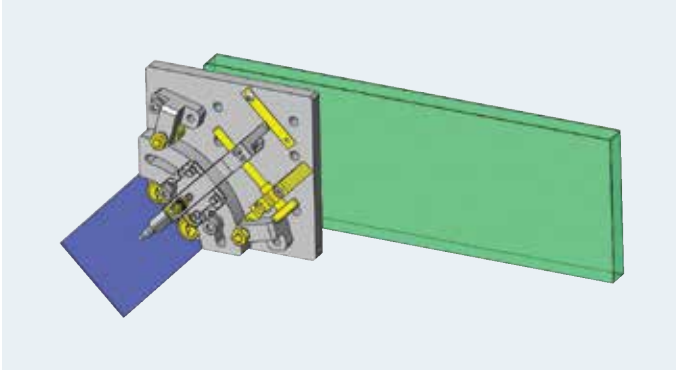

#IN23

### Workpiece Escaping Unit


Double acting cylinder mechanism with cam follower the cylinder performs two actions by using a cam

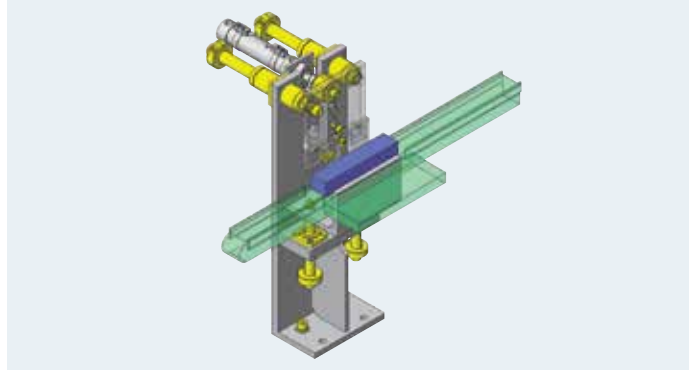

#IN67

### Escapement Unit


Double acting cylinder using an oscillating mechanism

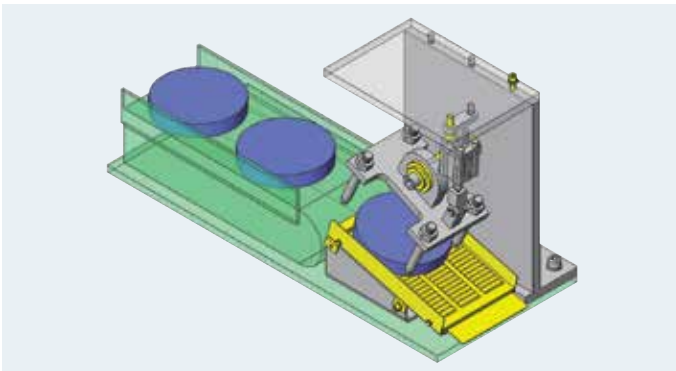

#IN142

### Stroke Lift Device


Lift device utilizing two cylinders

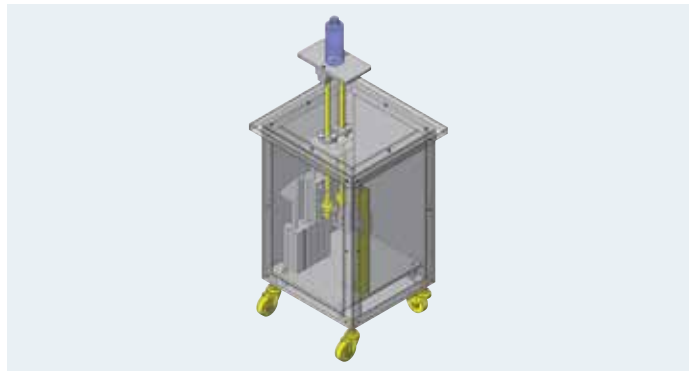

#IN128

### Sorting Mechanism


Reduce cycle time by utilizing right / left sorting mechanism

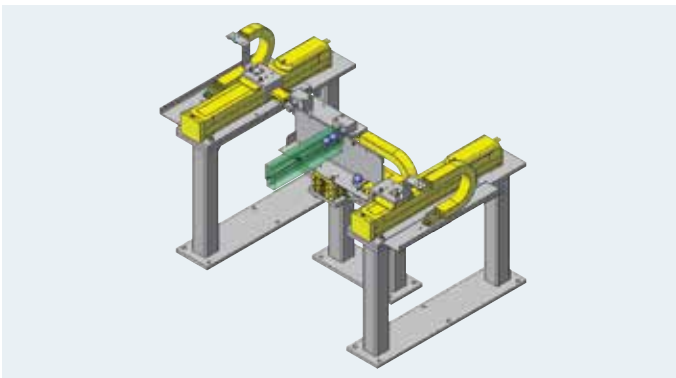

#IN144

### Workpiece Pusher

A buffering mechanism that utilizes a flat spring

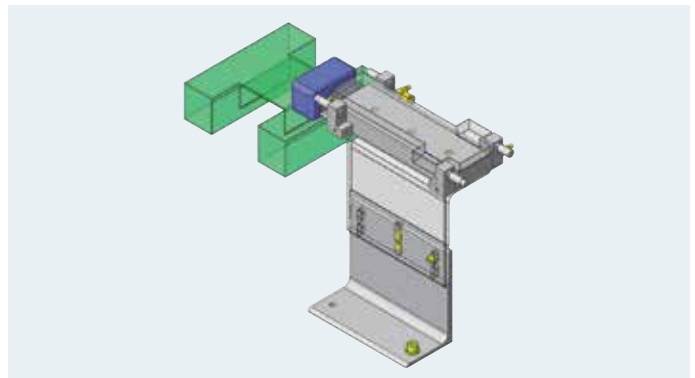




## Application Example

### Ejection / Collection

#IN12

### Tape Spool-Up Fixture

A mechanism that automatically spools the paper backing from doubly sided tape

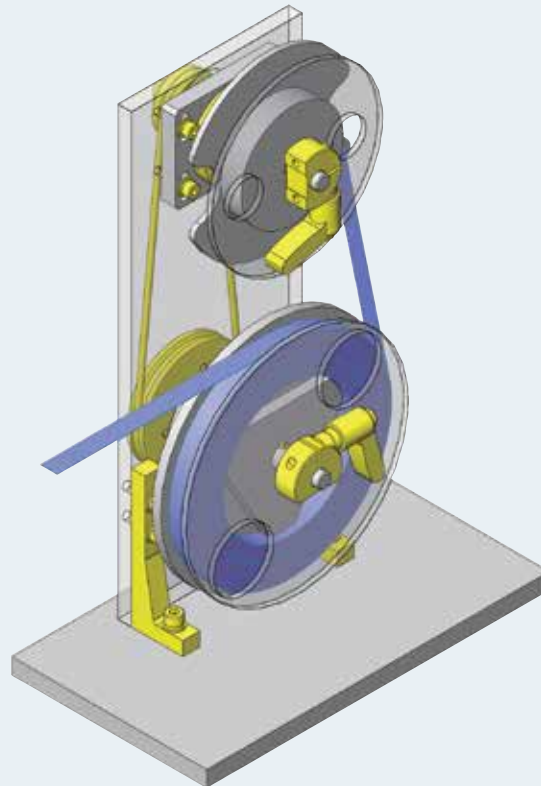

### MISUMI Part List

No.	Part Name	MISUMI Part Number	Qty
1	Pulleys for Round Belts – Setscrew	MBRA60-1.5-P10	1
2	Pulleys for Round Belts – Setscrew	MBRDA30-1.5-P8	1
3	Polyurethane Round Belts – Rope Type	MBT3-425	1
4	One-Way Clutches	BHFL10	1
5	Deep Groove Ball Bearings	SB6900ZZ	1
6	Bearings with Housings	SBARB628ZZ-25	1
7	Shaft Collars – Set Screw with 2 Holes	SSCTW12	1
8	Shaft Collars	SSCDKJM8-B	2
9	Economy Gussets (Precision Casting)	RQDW30-80	2
10	Parallel Keys	KESS4-8	1
11	Parallel Keys	KESS3-8	1
12	Metal Washers (Standard Class)	WSSS14-10-8	1
13	Metal Washers (Standard Class)	WSSS14-6-1	1
14	Metal Washers (Standard Class)	WSSS14-5-1	1
		WSSS12-8-6	1

### Application Overview

#### Purpose


- A machine that automatically spools the paper backing from double sided tape as the tape is dispensed.
- As the tape is pulled out, the lower pulley holds the tape in place while the upper pulley spools the paper backing.
- Through the use of a belt, the upper and lower pulleys are coupled together to absorb rotational speed differences.



#IN68

### Conveyor with Escapement


Escapement mechanism for gravity conveyor

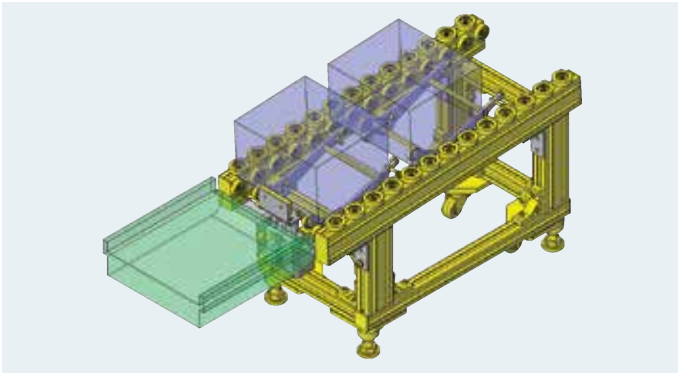

#IN143

### Branching / Merging Mechanism


Provides branching and merging of workpieces in various work stations

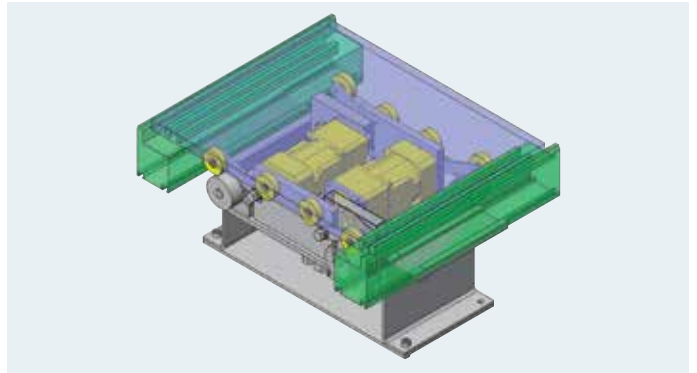

#IN175

### Workpiece Gripper Unit with Suction Cups


Fixing the sliding suction cup at hands

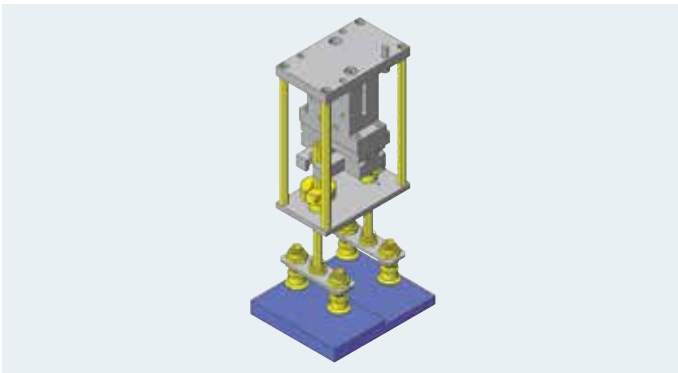

#IN161

### Workpiece Separation / Feed Mechanism


Separation and unloading of circular workpieces with a single cylinder

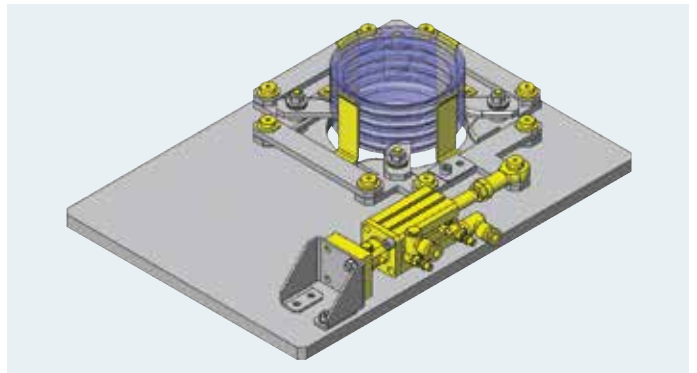

#IN7

### Stacking Fixture


Stackable workpiece holding fixture

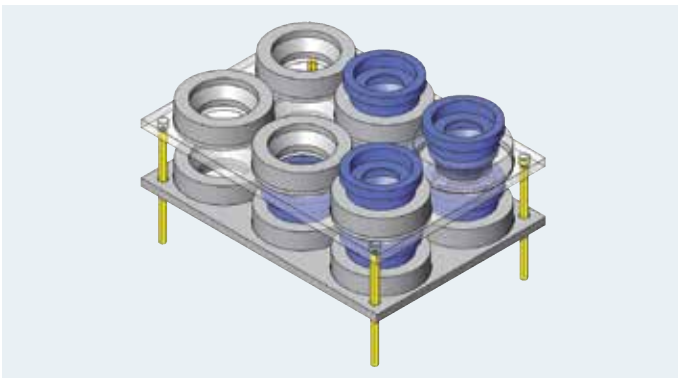

#IN81

### No Load Gripping Mechanism

No load gripping with a cylinder

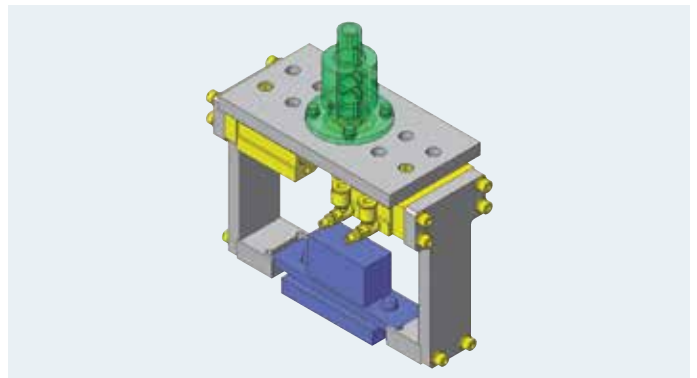




## Application Example

### Positioning / Clamp

#IN76

### Pallet Centering Mechanism

4 direction simultaneous clamping with a cylinder and a linkage mechanism

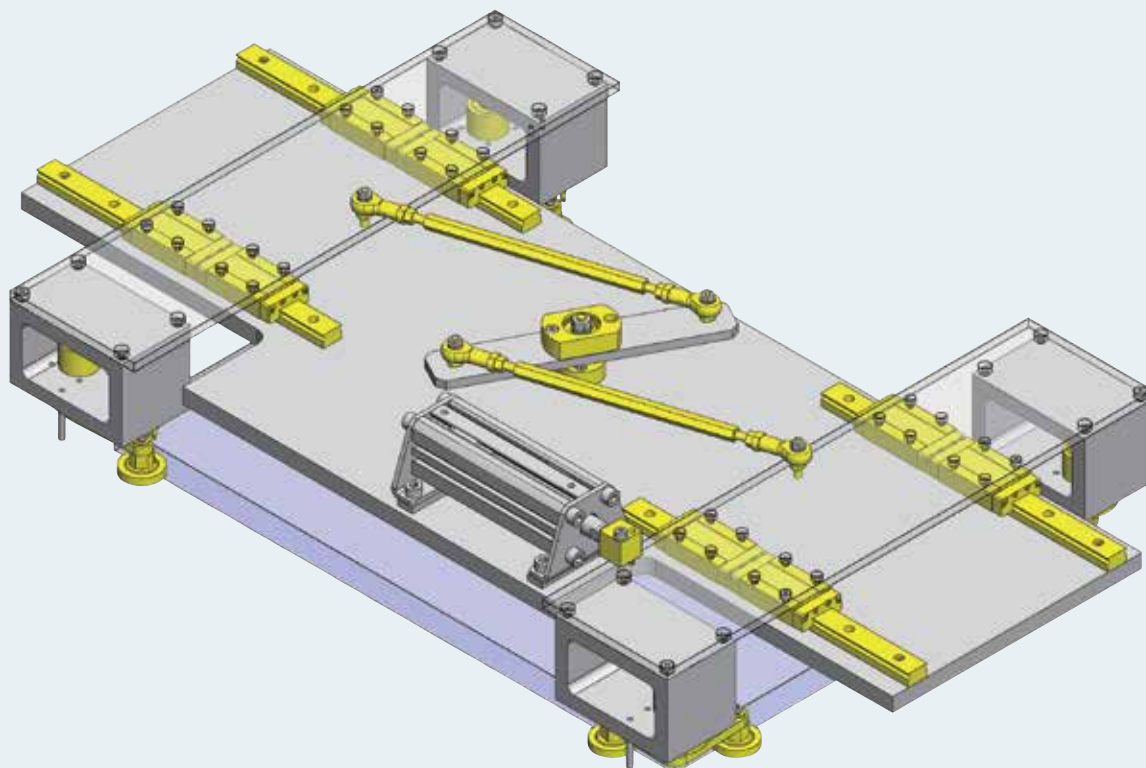

### MISUMI Part List

No.	Part Name	MISUMI Part Number	Qty
1	Miniature Linear Guides – Long Blocks	SSELB16-230	4
2	Cantilever Shafts – Flanged	PFXFC8-24-F6-M6	1
3	Bearings with Housings	BGCA608ZZ	1
4	Rod End Bearings (Standard)	PHSCM5	2
5	Rod End Bearings (Standard)	PHSCLM5	2
6	Rod End Coupling Rods	LBRFN5-190	2
7	Cantilever Shafts	PFXAC5-5-F7-MA4	4
8	Bearings with Housings	BARC626ZZ-35	4
9	Cantilever Shafts	PFXMB6-10-F35-T1-MA3	4
10	Collars (Standard/Precision Class)	NCLM6-10-23	4
11	Metal Washers (Standard Class)	WSSM10-3-1	24
12	Links – Angled, 3 Hole	LKBM6-L50-S50-Q90-H...	4
13	Cantilever Shafts	PFXMB6-10-F5-T1-MA3	8
14	Silicon Rubber/Leather Molded Bearings	UMBB6-28	8
		FJMXL6-1.0	1

### Application Overview

#### Purpose

- (Objective) One cylinder clamps in four directions.
- (Operation) Pallets transferred on a roller conveyor are centered at working position.

#### Points for Use

- Production line where the pallets are detected by photomicrosensor and stopped on the conveyor.
- Pallet evacuation mechanism is not needed.

#### Target Workpiece


- Shape: Pallet
- Size (mm): 450 W x 300 D x 20 H
- Weight: 5 kg



#IN152

### XY Floating Mechanism


Simplified floating mechanism

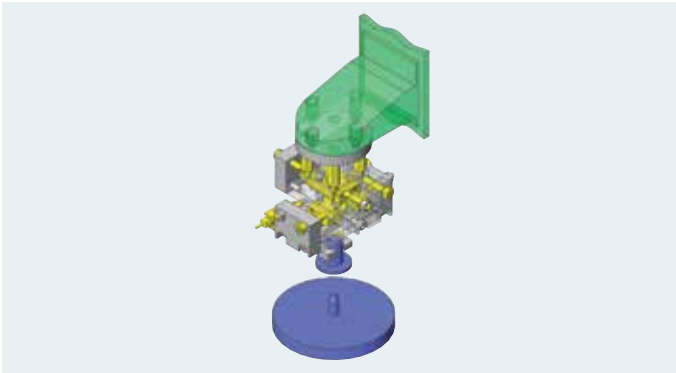

#IN139

### Workpiece Clamp Station


Clamp mechanisms operated by pneumatic linear actuator

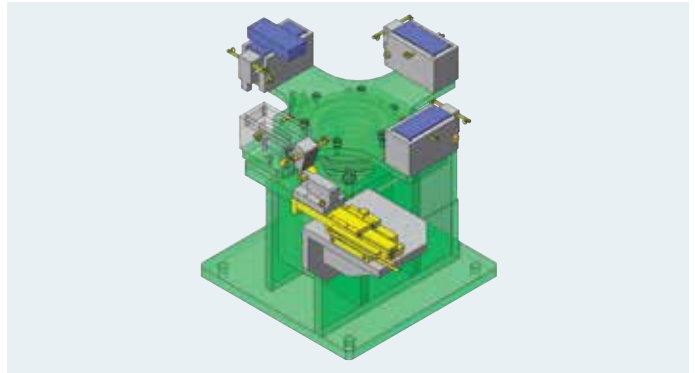

#IN27

### Centering Unit


Align scattered workpieces on a conveyor

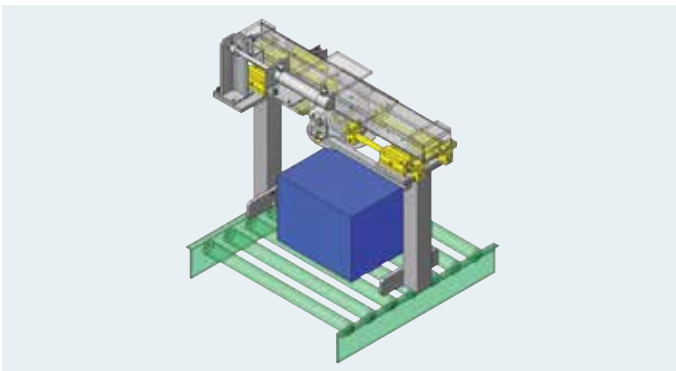

#IN5

### Soldering Fixture


Soldering fixture that can accommodate different size workpieces

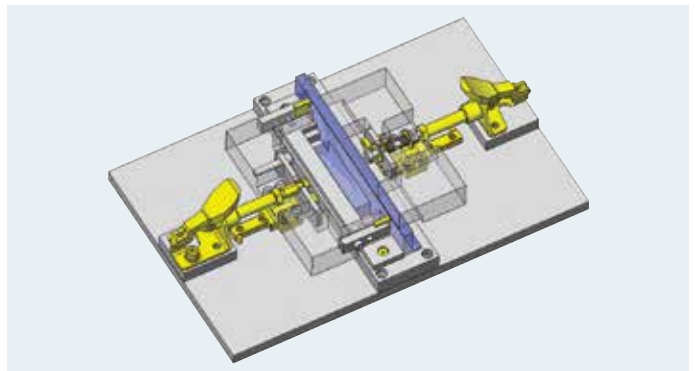

#IN42

### Manually Indexed Rotary Table


Ball Buttons are used to prevent wear on the outside of the housing

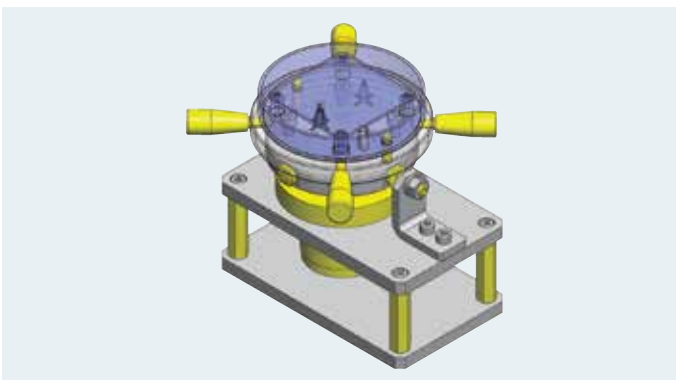

#IN79

### Linkage Operated Gripping Mechanism

Linkage operated grip mechanism controlled and released by an external force

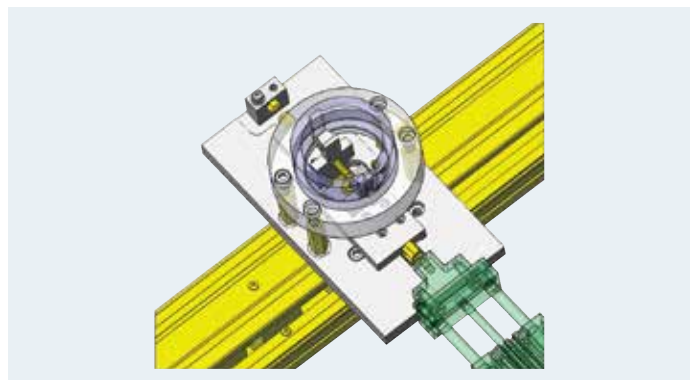




## Application Example

### Assembly / Machining

#IN10

### Film Press Bonding Device

Height adjustable with Aluminum Extrusion frame

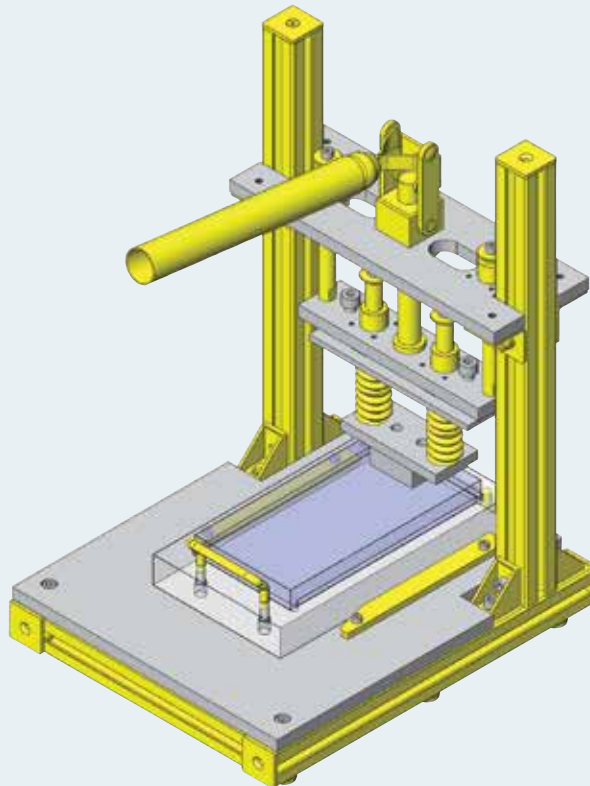

### MISUMI Part List

No.	Part Name	MISUMI Part Number	Qty
1	Toggle Clamps (Free Attachable)	MC02-3	1
2	Aluminum Frames	NEFS6-3030-190	2
3	Aluminum Frames	NEFS6-3030-350	2
4	Aluminum Frames	NEFS6-3030-300	2
5	Brackets	HBLFSN6	8
6	Flanged Linear Bushings	LHSK12	4
7	Precision Linear Shafts	SFJZ12-116-M5-N5-SC0	4
8	Floating Joints – Separate Thread	FJTM10-1.5-10	1
9	Round Wire Springs	UM20-70	2
10	Extrusion End Caps (For HFS6 Series)	HFCB6-3030-B	6
12	Guides Plates	WGTJ16-B8-L150-T5	2
13	L-Shaped Sheet Metal	FSLAS-SUD-T2-A30-B3...	4
14	Stainless Steel Pipe Frames	PFSUS28-200	1
15	Handles – Small Diameter Offset	UHFNSC60	1
		MSC8-20	2

### Application Overview

#### Purpose

- A manual mechanism for pressure bonding of film to aluminum case.

#### Points for Use

- Use guide to position the workpiece into correct position.
- Mechanism for pressure bonding is operated with toggle clamp.

#### Target Workpiece


- Aluminum case
- External Dimensions (mm): 90 W x 180 D x 16 H
- Weight: 700 g
- Thin film
- Dimensions (mm): 35 W x 30 D x 0.5 t



#IN111

### Z-Axis Elevating Mechanism


An elevating mechanism with slant mounted Linear Guide

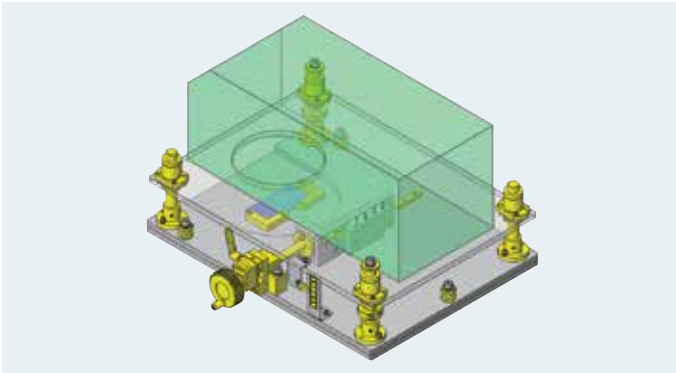

#IN2

### Film Press Bonding Device


Press bonding mechanism with uniform load adjustment mechanism

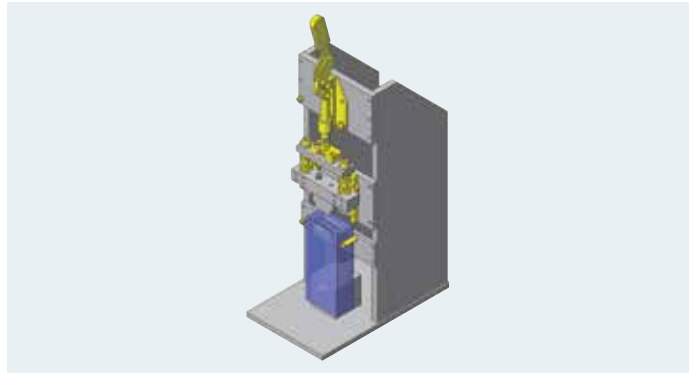

#IN9

### Fixture with Adjustable Positioning


Workpiece angle can be adjusted by Stopper Bolts

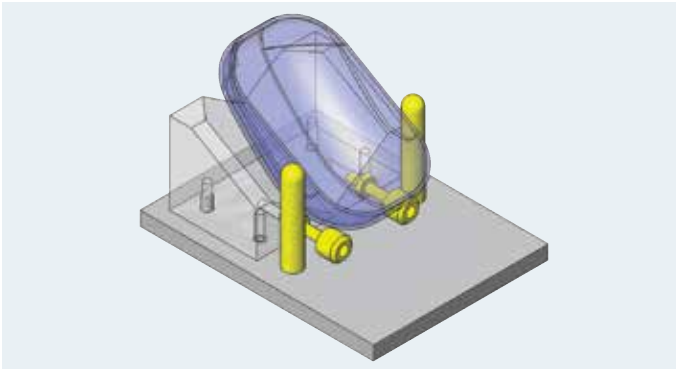

#IN24

### Semi-Automatic Grinding Device


A Single Axis Robot with vertical movement controlled by hand

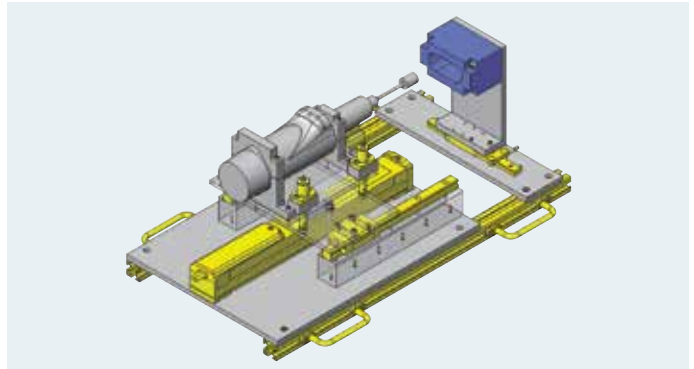

#IN8

### PC Board Fixture


Retention using eccentric cam

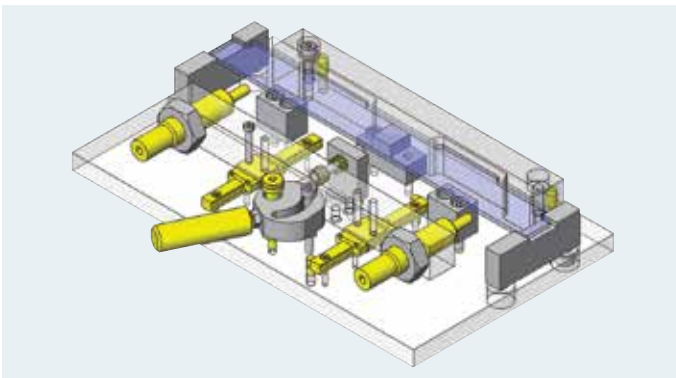

#IN176

### Revolving Pneumatic Gripper

Pneumatic gripper capable of transmitting revolution

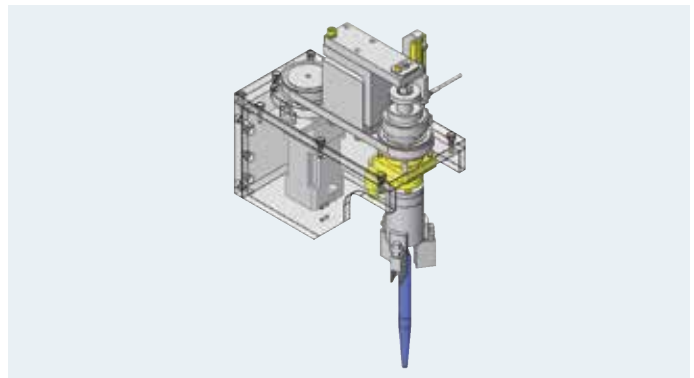




## Application Example

### Inspection / Measurement

#IN149

### Film Press Bonding Device

Height adjustable with Aluminum Extrusion frame

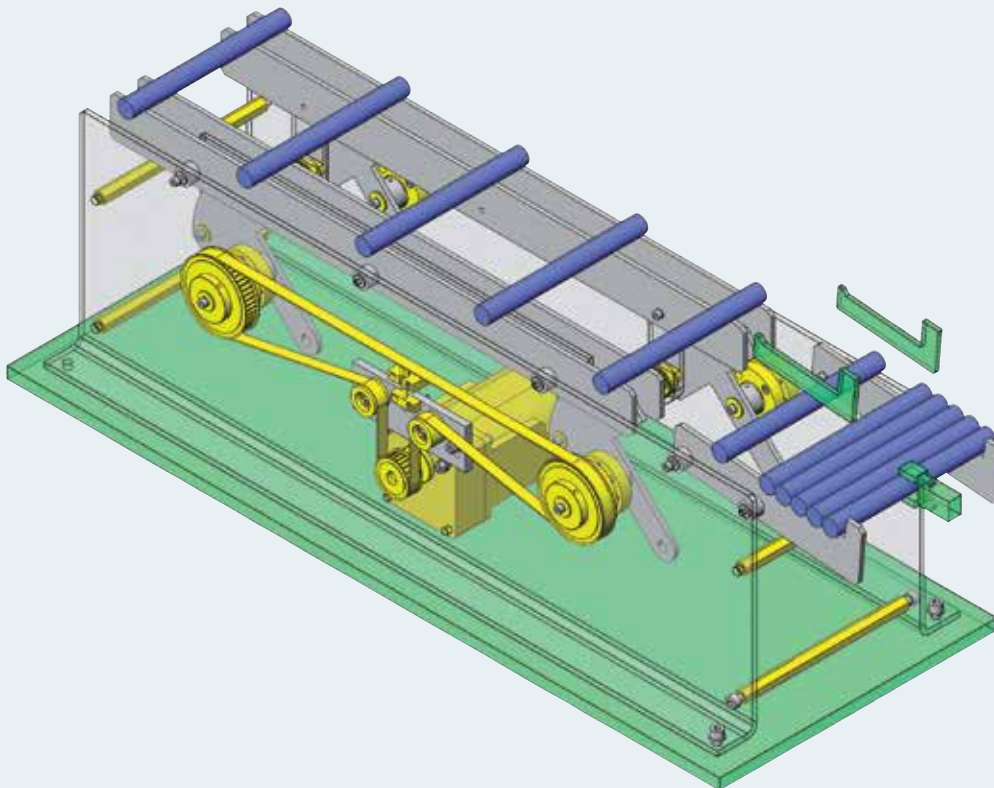

### MISUMI Part List

No.	Part Name	MISUMI Part Number	Qty
1	Rotary Shafts	PSFHKRW15-76-M5-N5-...	2
2	Rotary Shafts	PSFHKRW15-47-M5-N5-...	2
3	Rotary Shafts	PSFRHH15-100-F24-P1...	2
4	Bearings with Housings	BGRR6002ZZ	8
5	Deep Groove Ball Bearings	B6001ZZ	4
6	Metal Washers (Standard Class)	FWSSM-D21-V15-T6	4
7	Metal Washers (Standard Class)	FWSSM-D21-V15-T4	6
8	Metal Washers (Standard Class)	WSSM20-5-2	8
9	Metal Washers (Standard Class)	WSSM16-5-2	4
10	Collars (Standard/Precision Class)	FNCLM-V12-D16-L12	4
11	High Torque Timing Pulleys – 5GT	GPA50GT5120-A-N15	2
12	High Torque Timing Pulleys – 5GT	GPA25GT5120-B-N12	1
13	Super High Torque Timing Belts	GBN1330EV5GT-120	1
14	Motor with Electromagnetic Brake	PACMB90-W40-V100	1
		PACMGX90-10	1

### Application Overview

#### Purpose

- To feed cylinder-shaped workpieces at a fixed rate

#### Target Workpiece

- Shape: aluminum cylinder part
- Size: Ø20 x 200 mm
- Weight: 0.15 kg






#IN44

### Slide Positioning Mechanism


Slide positioning mechanism indexed with a Ball Plunger

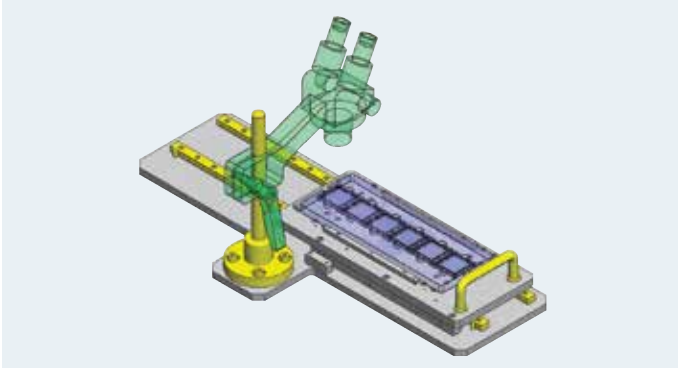

#IN3

### Roller Runout Inspection


The workpiece is held with V Blocks and Urethane Molded Bearings, enabling highly accurate runout inspection

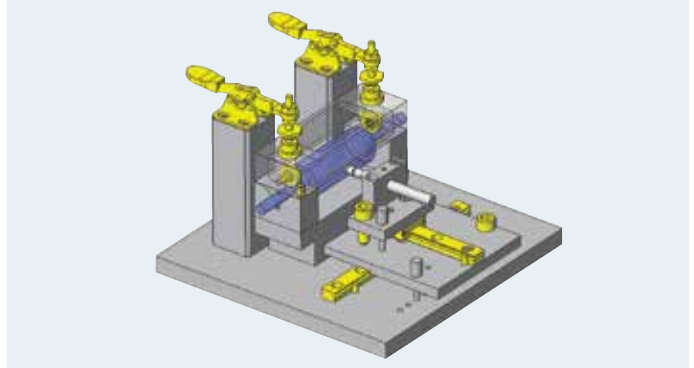

#IN43

### Simple Slide Positioning


Simple indexing slide mechanism using Roller plunger

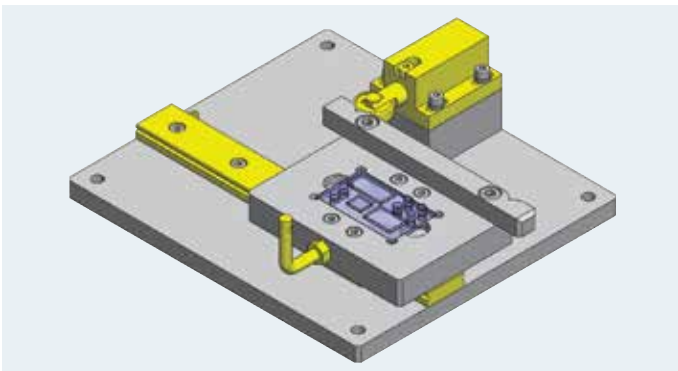

#IN36

### Multi-Point Position Slide Unit


A multi-position slider with a Single Axis Robot

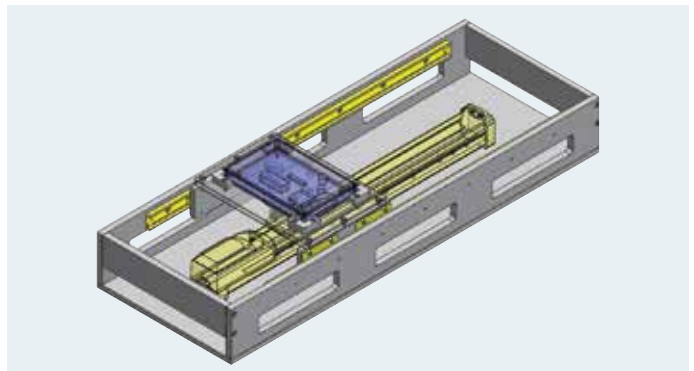

#IN147

### Laser Height Adjustment Mechanism


Simplified height adjustment

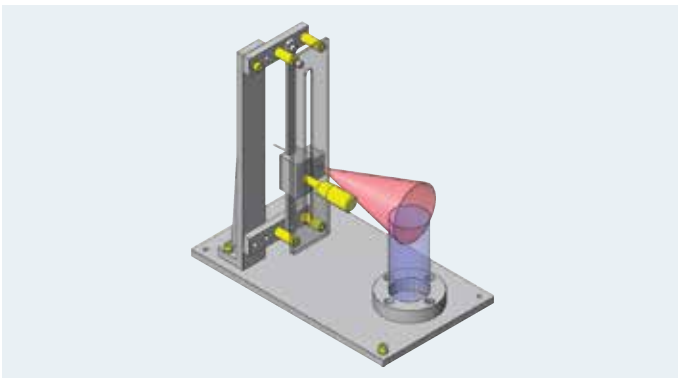

#IN15

### Surface Inspection Fixture

Surface inspection fixture with Toggle Clamp for quick setup

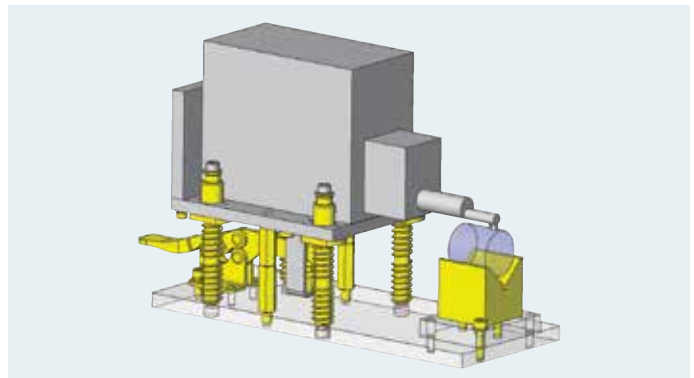




## Application Example

### Drive

#IN140

### Shuttle Transfer Mechanism

Two workpieces are transferred simultaneously through a belt mechanism

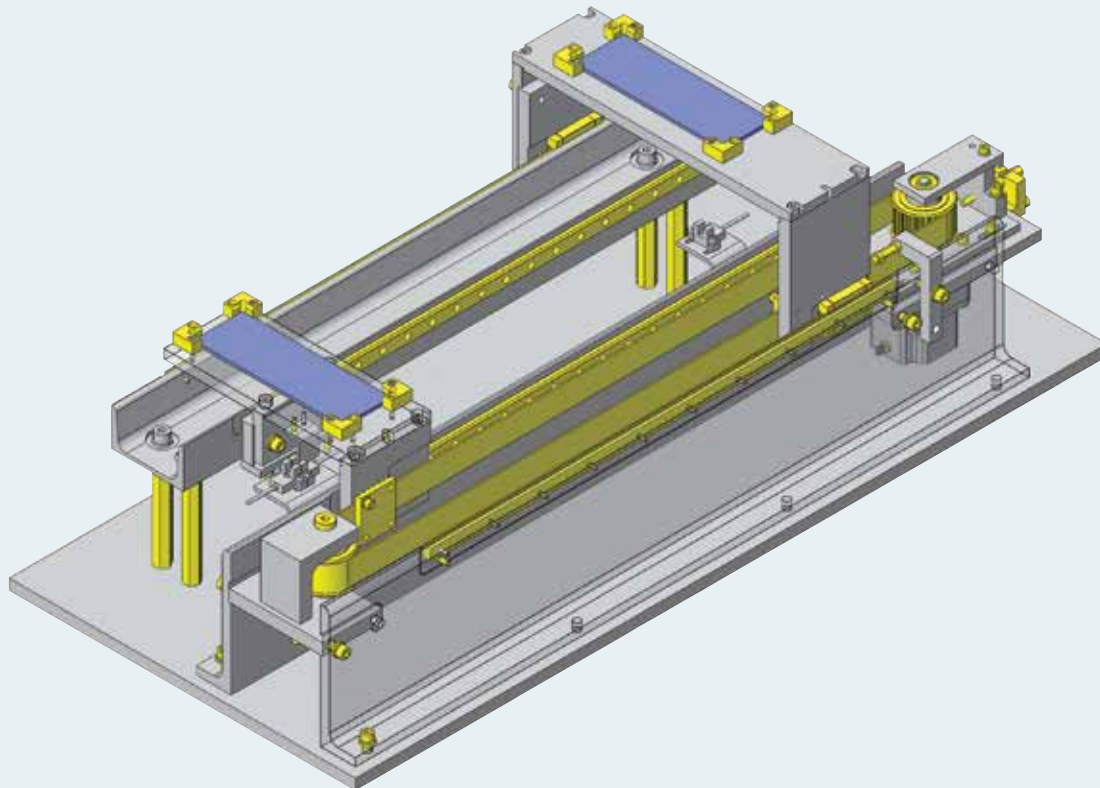

### MISUMI Part List

No.	Part Name	MISUMI Part Number	Qty
1	High Torque Timing Pulleys S5M Type	HTPA28S5M250-A-P8-Q...	1
2	Flanged Idlers with Teeth	AHTFW28-S5M250-10	1
3	High Torque Timing Belts	HTBN1350S5M-250	1
4	Timing Belt Clamp Plate	TBCR-S5M250	2
5	Small Deep Groove Ball Bearings	FL608ZZ	1
6	Precision Pivot Pins	CLBRU10-66.0	1
7	Bearing Spacers	CLBU10-17-5	1
8	Bearing Spacers	CLBU10-17-7	1
9	Blocks for Adjusting Bolts	AJSLCM5-25	1
10	Hex Posts	LSBWF13-100	4
11	Miniature Linear Guides – Long Blocks	SSELB13-470	4
12	Stopper Bolts With Bumpers	UST5-25	2
13	Adjusting Bolts – Hexagon Type, Standard	AJSTM5-35	1
14	Dowel Pins	MSC4-12	6
		WGLBC-20-10-10	8

### Application Overview

#### Purpose

- A single driving mechanism to simultaneously transfer two workpieces in opposite directions.

#### Points for Use

- Automatic mechanism in which a single driving mechanism drives two tables

#### Target Workpiece


- Workpiece: printed circuit board
- Outer Dimensions (mm): 150 W x 50 D x 3 H
- Workpiece Weight: 50 g



#IN80

### Feeding Mechanism for Round Bars


Transfer workpieces with a saw tooth mechanism

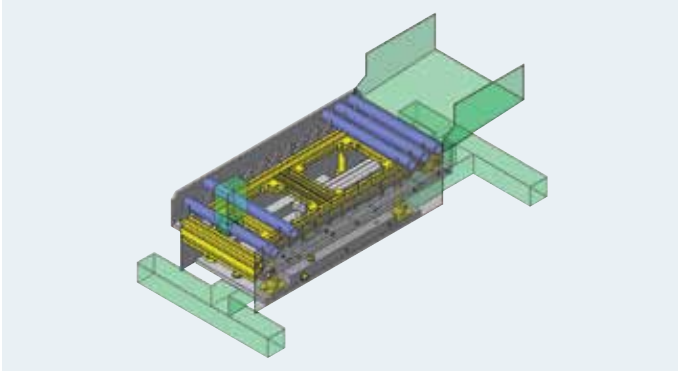

#IN127

### Workpiece Inversion and Transfer Mechanism


Rotate and transfer but workpiece orientation in direction of travel remains the same

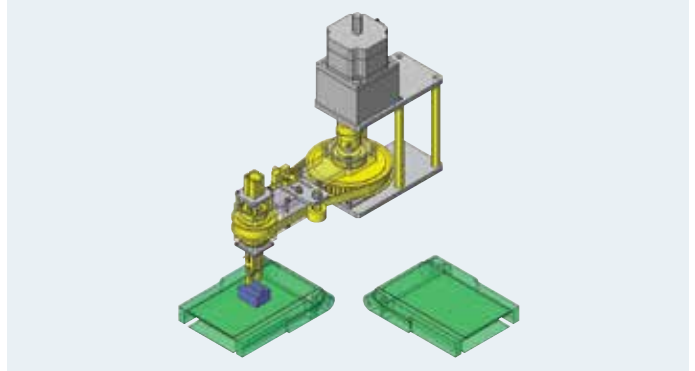

#IN167

### Collective Chuck


Flat spring structure at the tips of the chuck to prevent stress on workpieces

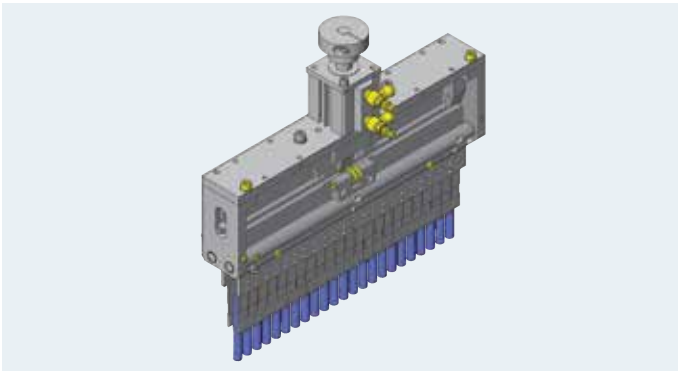

#IN148

### Intermittent Rotation Mechanism


Cylinder-driven index table

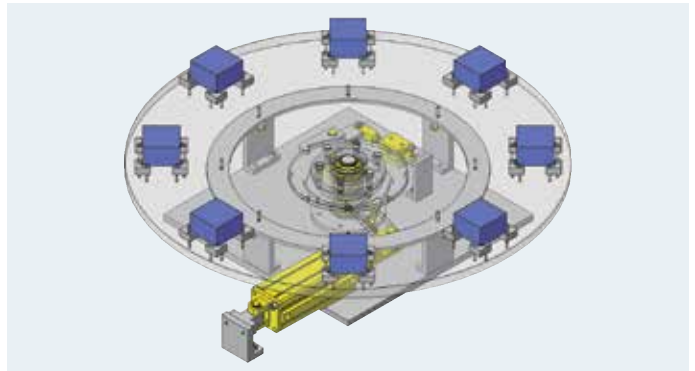

#IN181

### Reduces the Thrust Load of a Small-Size Motor Shaft


Reducing the thrust load without using a coupling

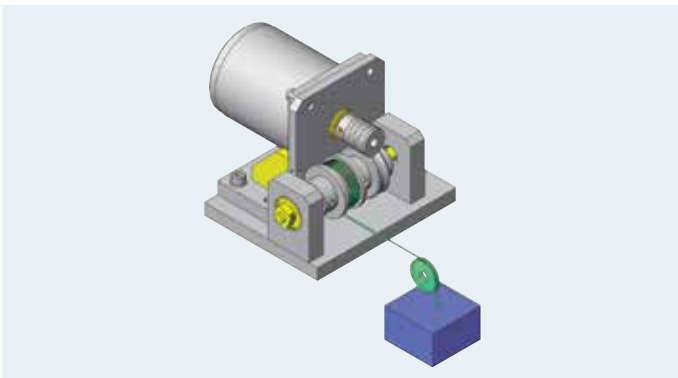

#IN84

### Long Stroke Slide Mechanism

Belt driven self propelled mechanism

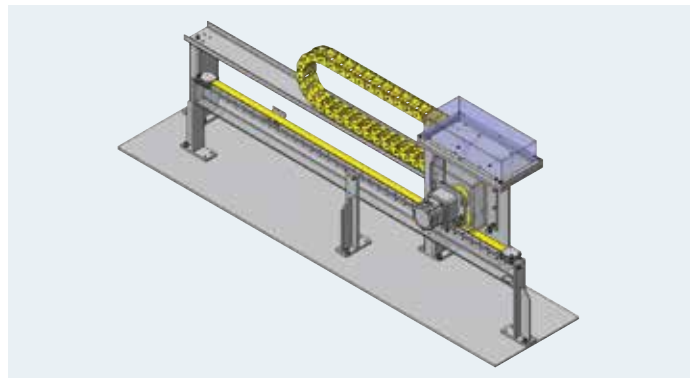




## Application Example

### Workpiece Treatment

#IN25

### Rotating Fixture Mechanism

Slow rotation of fixture is controlled by rotary damper

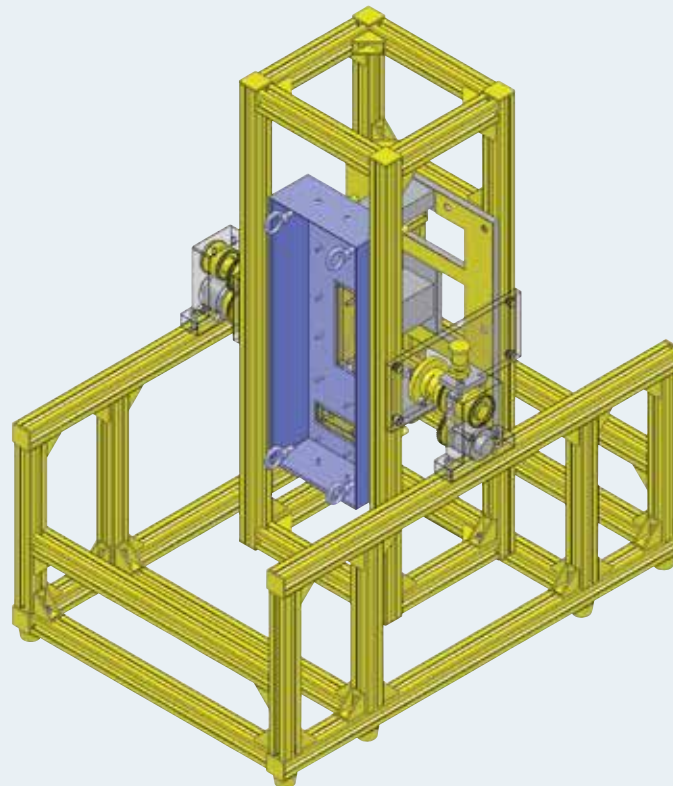

### MISUMI Part List

No.	Part Name	MISUMI Part Number	Qty
1	Indexing Plungers – Tip Shape Selectable	SXPKN16L	1
2	Shaft Supports	SSTHWIR20	2
3	Spur Gears	GEAS1.0-50-10-B-8	2
4	Spur Gears	GEAS1.0-50-10-B-22	2
5	Deep Groove Ball Bearings	B6004ZZ	4
6	Retaining Rings – Internal, C-Type	RTWS42	2
7	Retaining Rings – External, C-Type	STWS20	1
8	Rotary Shafts – End Shape Selectable	SSFRGD-D22-L39-F29-...	1
9	Rotary Shafts – End Shape Selectable	SSFRDD-D22-L29-F39-...	1
10	Aluminum Extrusions	HFS6-3030-170	4
11	Aluminum Extrusions	HFS6-3030-200	6
12	Aluminum Extrusions	HFS6-3030-250	8
13	Aluminum Extrusions	HFS6-3030-420	6
14	Aluminum Extrusions	HFS6-3030-700	8
		HBLFSN6	60

### Application Overview

#### Purpose

- A fixture to assemble a heavy cover on a workpiece with screws on multiple surfaces.

#### Operation Procedure


1. Set up the cover and the main body (workpiece) on the fixture.
2. Temporarily fix the main body on the fixture by hand-tightening bolts.
3. Turn the fixture 90° and assemble the cover and the main body with the screws (top, bottom, front, and back).
4. Turn the fixture back to the original position and remove the bolts.



#IN183

### Removable Turntable


Bottom view of removable turntable

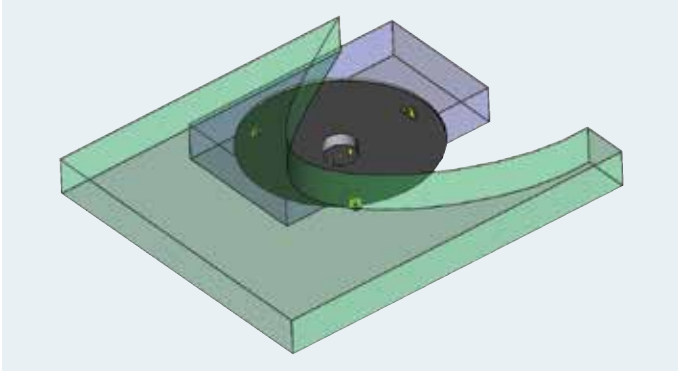

#IN55

### Material Transport Cart


Transport cart made of aluminum extrusion

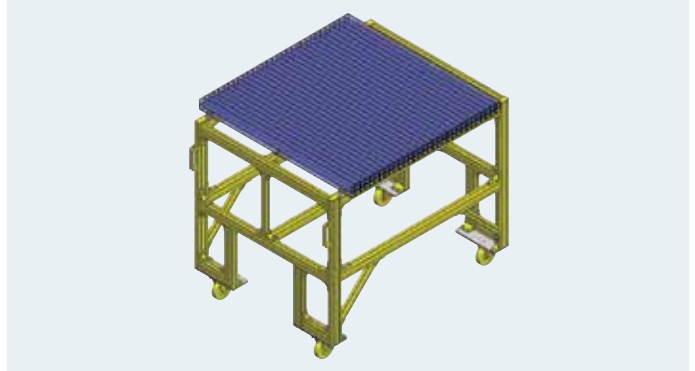

#IN63

### Long Length Precision Table


Long table constructed from configurable components

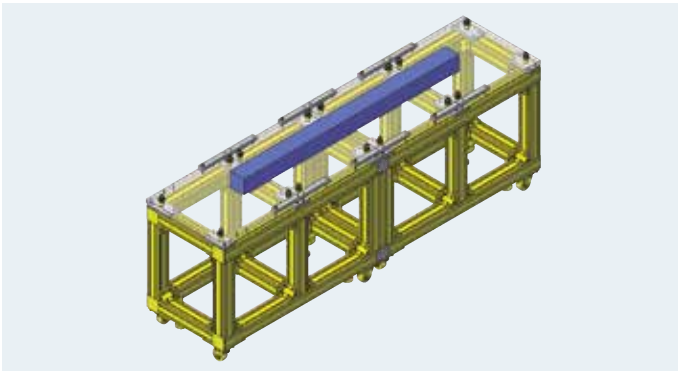

#IN93

### Guided Shutter Mechanism


Aluminum Extrusion slots are utilized as shutter guides

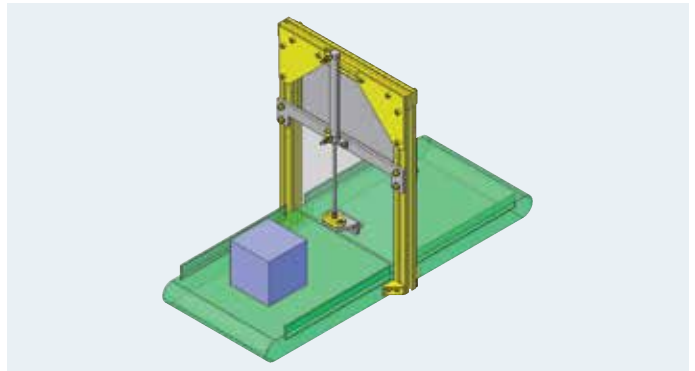

#IN94

### Detection Curtain


Curtain style detection

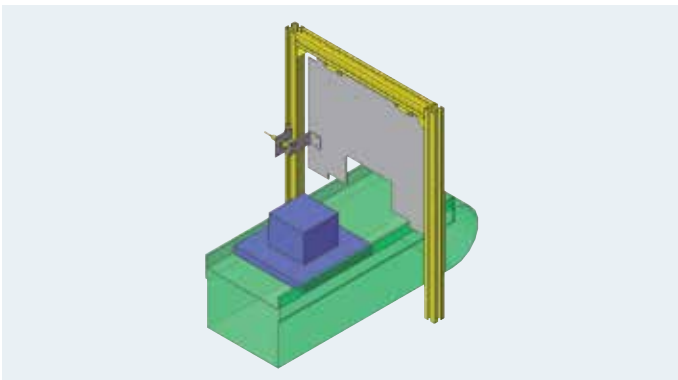

#IN106

### Adjustable Low Profile Cart

XY adjustment using flat rollers

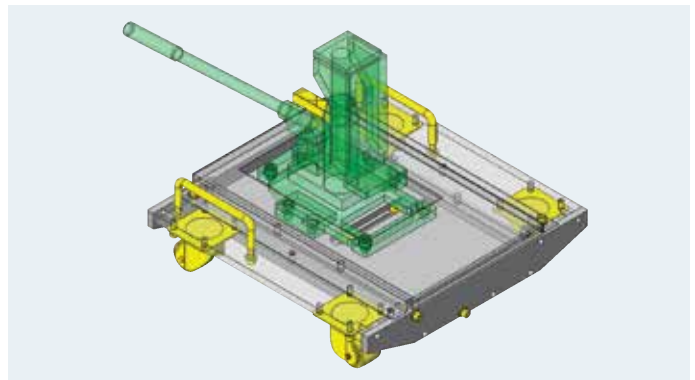




# Application Example

## Workpiece Treatment

#IN95

### Soldering Hand with Air Purge

Simple nozzle and distance adjustments

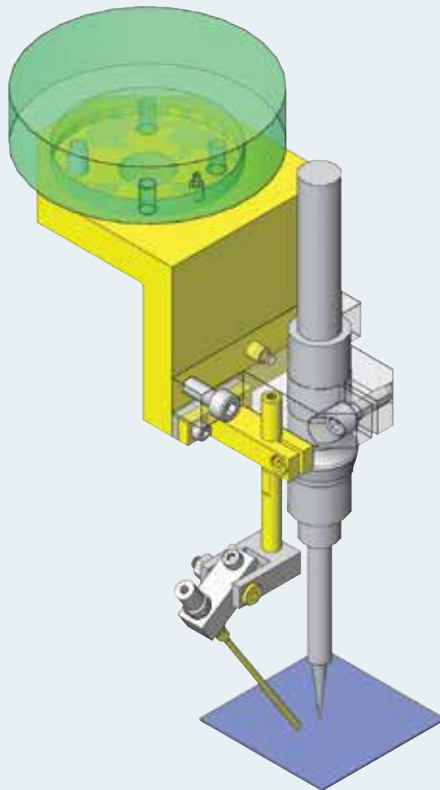

### MISUMI Part List

No.	Part Name	MISUMI Part Number	Qty
1	Angles – Extruded	LRA12-A75-B60-L65	1
2	Shaft Supports – T-Shaped, Slit Type	SHSTS6-25	1
3	Precision Linear Shafts	PSSFZ6-55-M3-N3-SC...	1
4	Air Blow Nozzles	ABNZL5-2.0-65	1
5	Bearing Shaft Screws	BGPSL4-7-L22-F7	1
6	Dowel Pins Straight Type	MS4-10	1
7	Dowel Pins Straight Type	MS5-10	1

### Application Overview

#### Purpose

- Air purge nozzle removes post-solder oxidation material from soldering iron tip.

#### Points for Use

- The air purge should be done away from the work piece. A suction component should also be used to prevent secondary contamination.
- Adjust the nozzle position for most effective air purging of oxidation.

#### Target Workpiece


- Electronic PC board
- Dimensions: 50 W x 50 H x 1 t
- Weight: 0.1kg



#IN122

### Air Blow Device


An air blow device that blows air from all directions

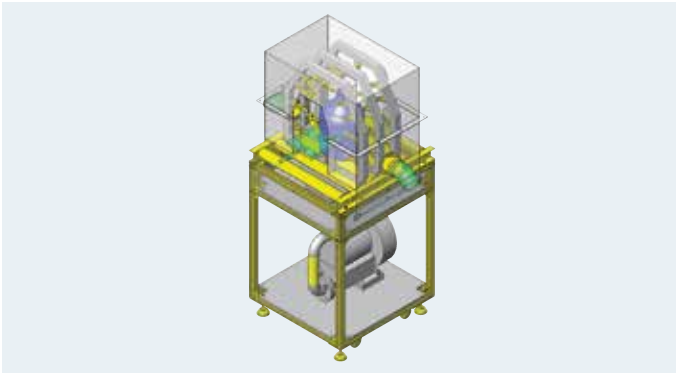

#IN204

### Camera Adjustment Device with Air Blower


Camera with air blower

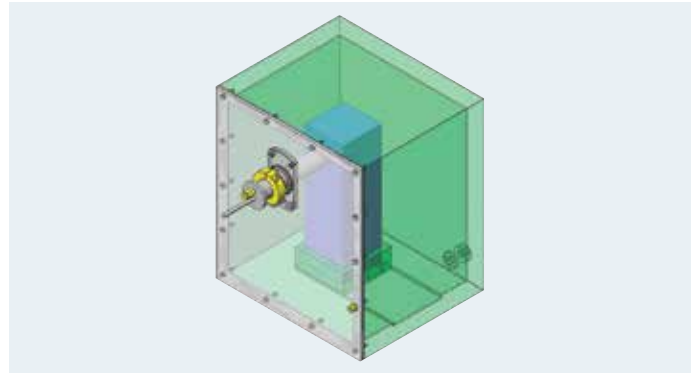

#IN233

### Rotary Part Cleaning Unit


Cleans workpiece exterior with a rotary arm nozzle

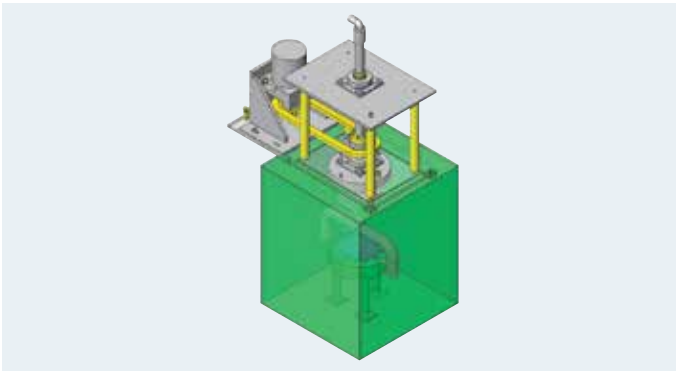

#IN260

### Rotation / Lift Device


Rotation and lift device

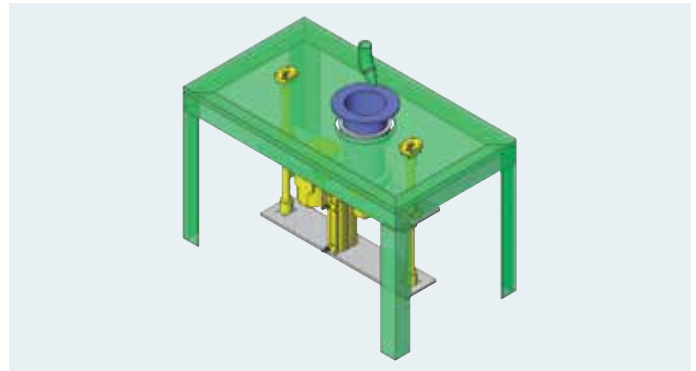

#IN225

### Brush Cleaning


Glass circuit board cleaning device

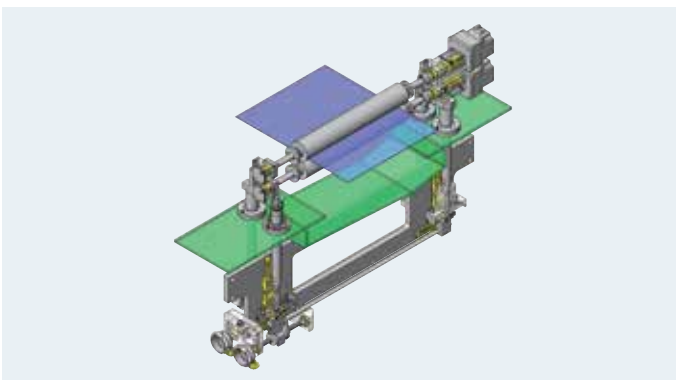

#IN229

### Swing Clamp

Clamps and rotates workpiece in a swing motion

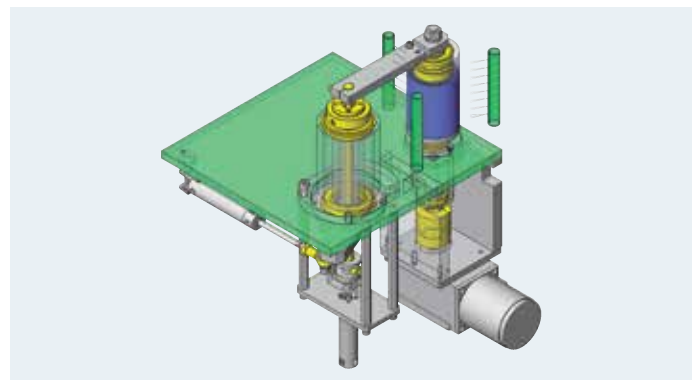




## Application Example

### Positioning / Clamping

#IN48

### Workpiece Clamp Fixture

Choosing clamps based on setup frequency

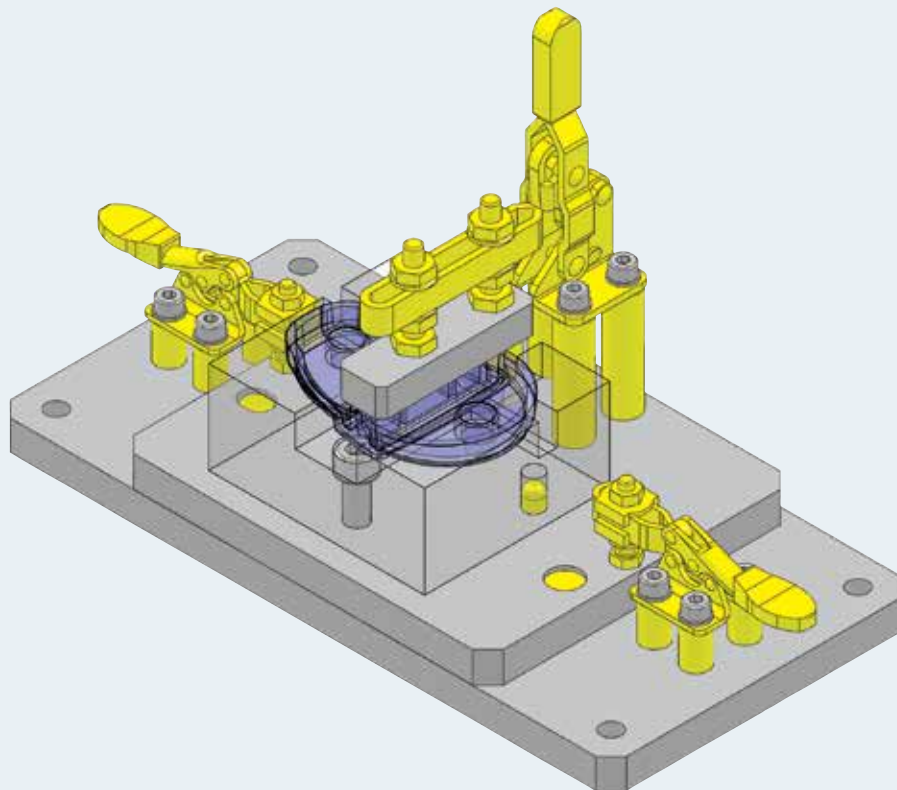

### MISUMI Part List

No.	Part Name	MISUMI Part Number	Qty
1	Toggle Clamps – Horizontal Handle	MC01-2	2
2	Collars (Standard/Precision Class)	NCLB4-8-12	8
3	Dowel Pins Straight Type	MS10-20	2
4	Dowel Pins Straight Type	MS8-20	2
5	Locating Pins – Straight, Sphere	SLPSQAG6-L15	4
6	Toggle Clamps	MC04-1L	2
7	Collars – Standard/Precision Class	NCLB4-10-35	8
8	Miniature Clamp Levers – Threaded	CLDMC6-12-B	2

### Application Overview

#### Purpose

- Fixture for press-fitting insertion nuts into various workpieces

#### Target Workpiece

- Plastic cases
- Approximate Workpiece Size (mm): 45 W x 62 D x 10 H






#IN172

### Space-Saving and Long-Stroke Device


Speeding up with long stroke

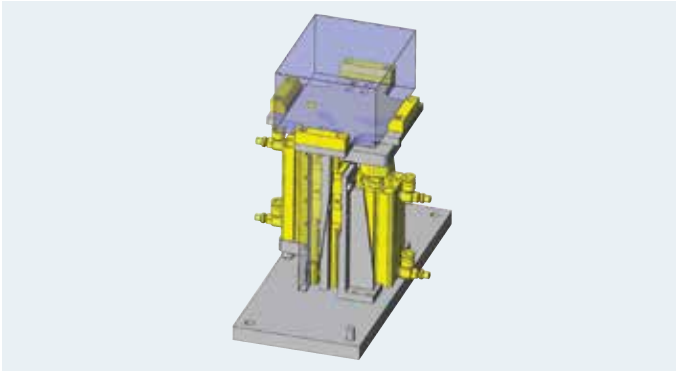

#IN137

### Adjustable Height Clamping Mechanism


Simple switching by manual operation

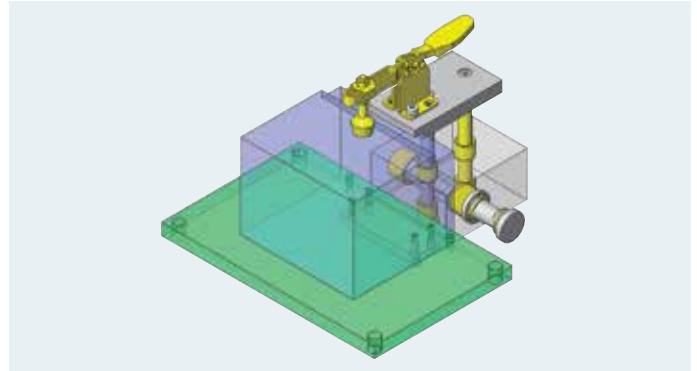

#IN275

### Multi-Position Setup Device


Setup by means of shift lever groove

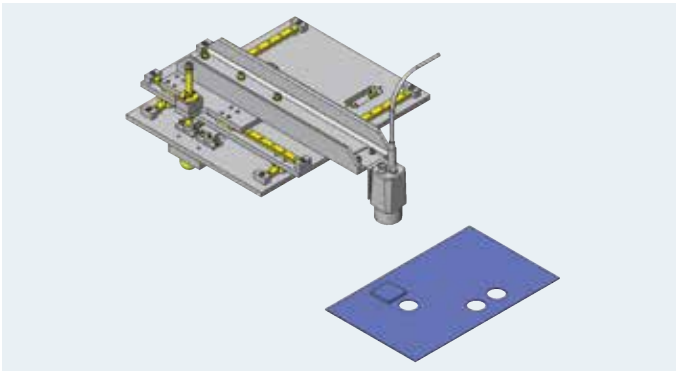

#IN51

### Tray In-Position Confirmation Process


Workpiece detection with diagonally placed detection units

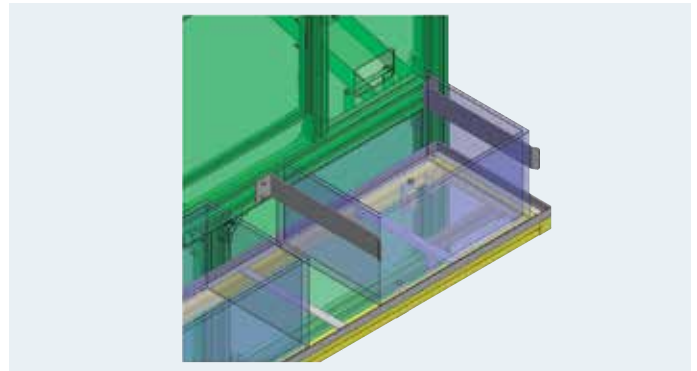

#IN108

### Linear Movement Mechanism


Slowly strokes for a short distance

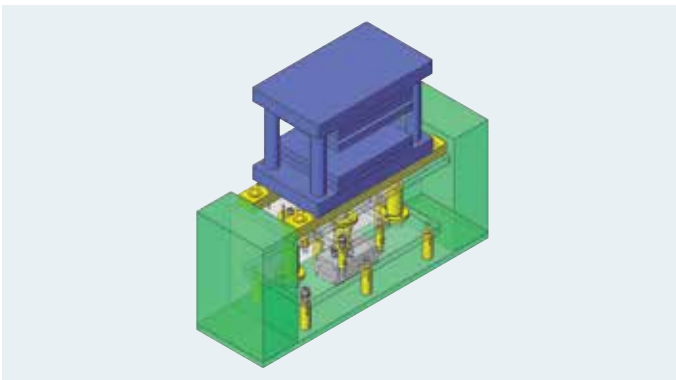

#IN301

### Width Change Mechanism

Right and left movement synchronization using center of the workpiece as the reference

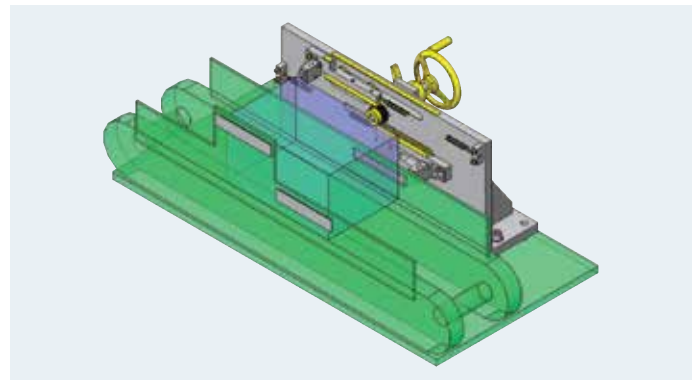




## Application Example

### Human and Workpiece Safety

#IN102

### Aluminium Folding Door with Sensor

Simple construction and space saving with a folding door

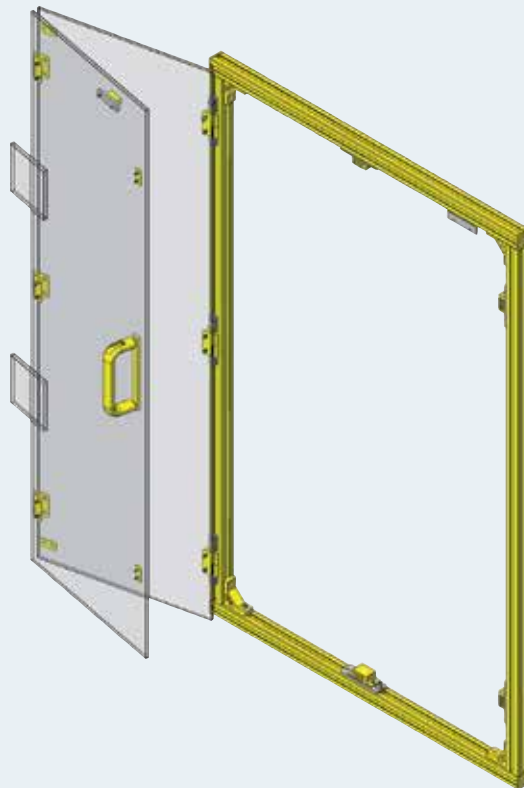

### MISUMI Part List

No.	Part Name	MISUMI Part Number	Qty
1	Aluminum Frames	NEFS6-3030-1090	2
2	Aluminum Frames	NEFS6-3030-734	2
3	Frame End Caps – 6 Series	HFC6-3030-S	4
4	Brackets	HBKTS6	4
5	Pre-Assembly Insertion Short Nuts	HNTT6-6	24
6	Magnet Catches with Ferrite Magnet	MGCE1	4
7	Door Limit Switches	BCWS1	1
8	Detachable Hinges (Stainless Steel)	SHHPSLC6-2	3
9	Handles – Oval, Standard Lengths	UADS132	1
10	Rectangular Washers & Nuts	FK2TS16-A150-P132	1
11	Cross Recessed Low Flat Head Screws	TSARA3-6	8
12	Flat Head Cap Screws (Pack)	SFB4-8	6
13	Flat Head Cap Screws (Pack)	SFB4-15	18
14	Thread Inserts	HLTS3-6	10
15	Detachable Hinges (Stainless Steel)	SHHPSRC6-2	3

### Application Overview

#### Purpose

- A transparent door with a open / closed confirmation function

#### Points for Use


- A door limit switch is used to indicate if the door is open or closed.
- The door rotates 180° at the base and 180° at the center hinges. A magnetic catch is used to hold the door closed.



#IN4

### Free Angle Soldering Fixture


Easy one-touch workpiece holding mechanism

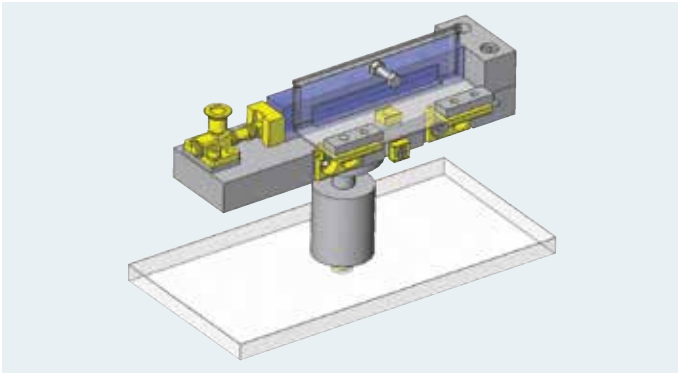

#IN54

### Removable Window Panel


Removable window panel with knobs and keyholes

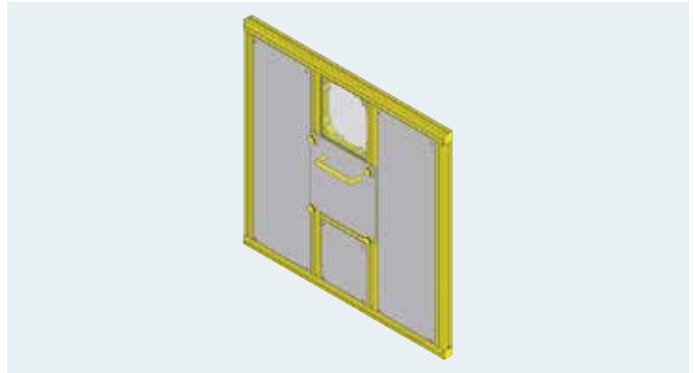

#IN87

### Aluminum Extrusion Frame Door


Simple open / close detection structure

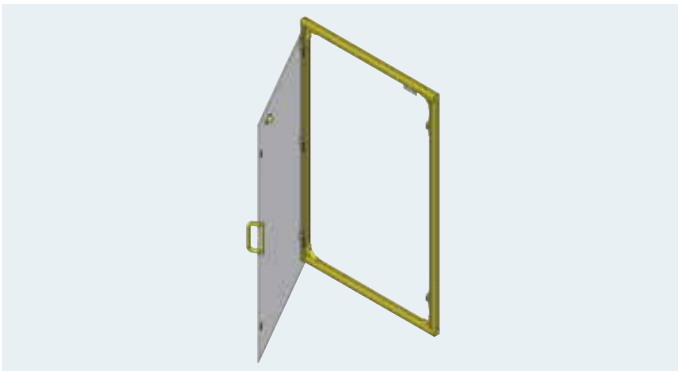

#IN85

### Shutter Mechanism


A shutter utilizing pulley / belt + bevel gear

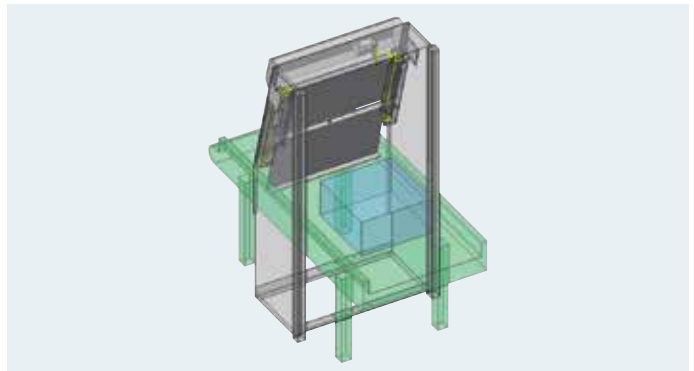

#IN91

### Automated Door


A cylinder powered mechanism used to open a door

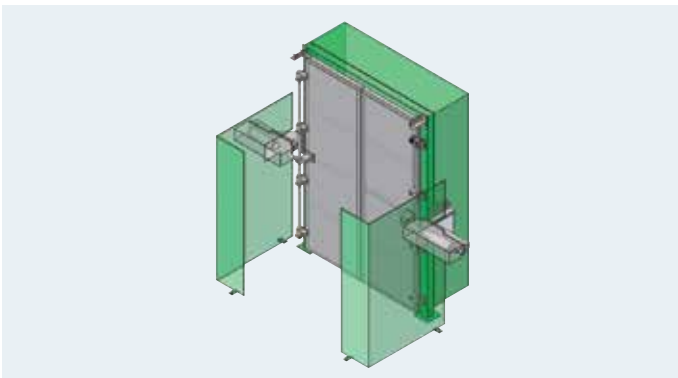


#IN104

### Automated Ventilation Mechanism

Rapid Cooling Mechanism

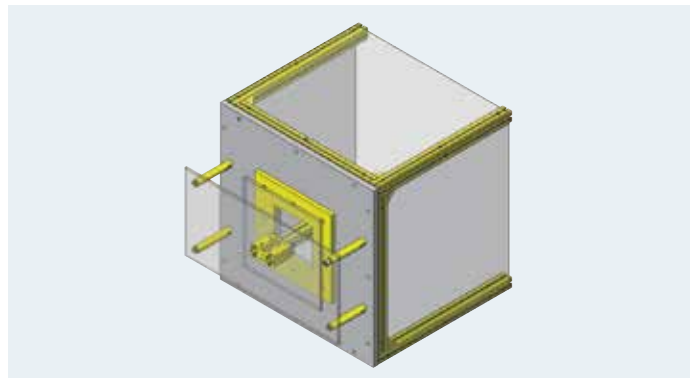

**MISUMI USA TECHNICAL DATA**  
**AT YOUR FINGERTIPS.** This technical reference section contains information on tolerances, allowances, calculations, sizing and more.

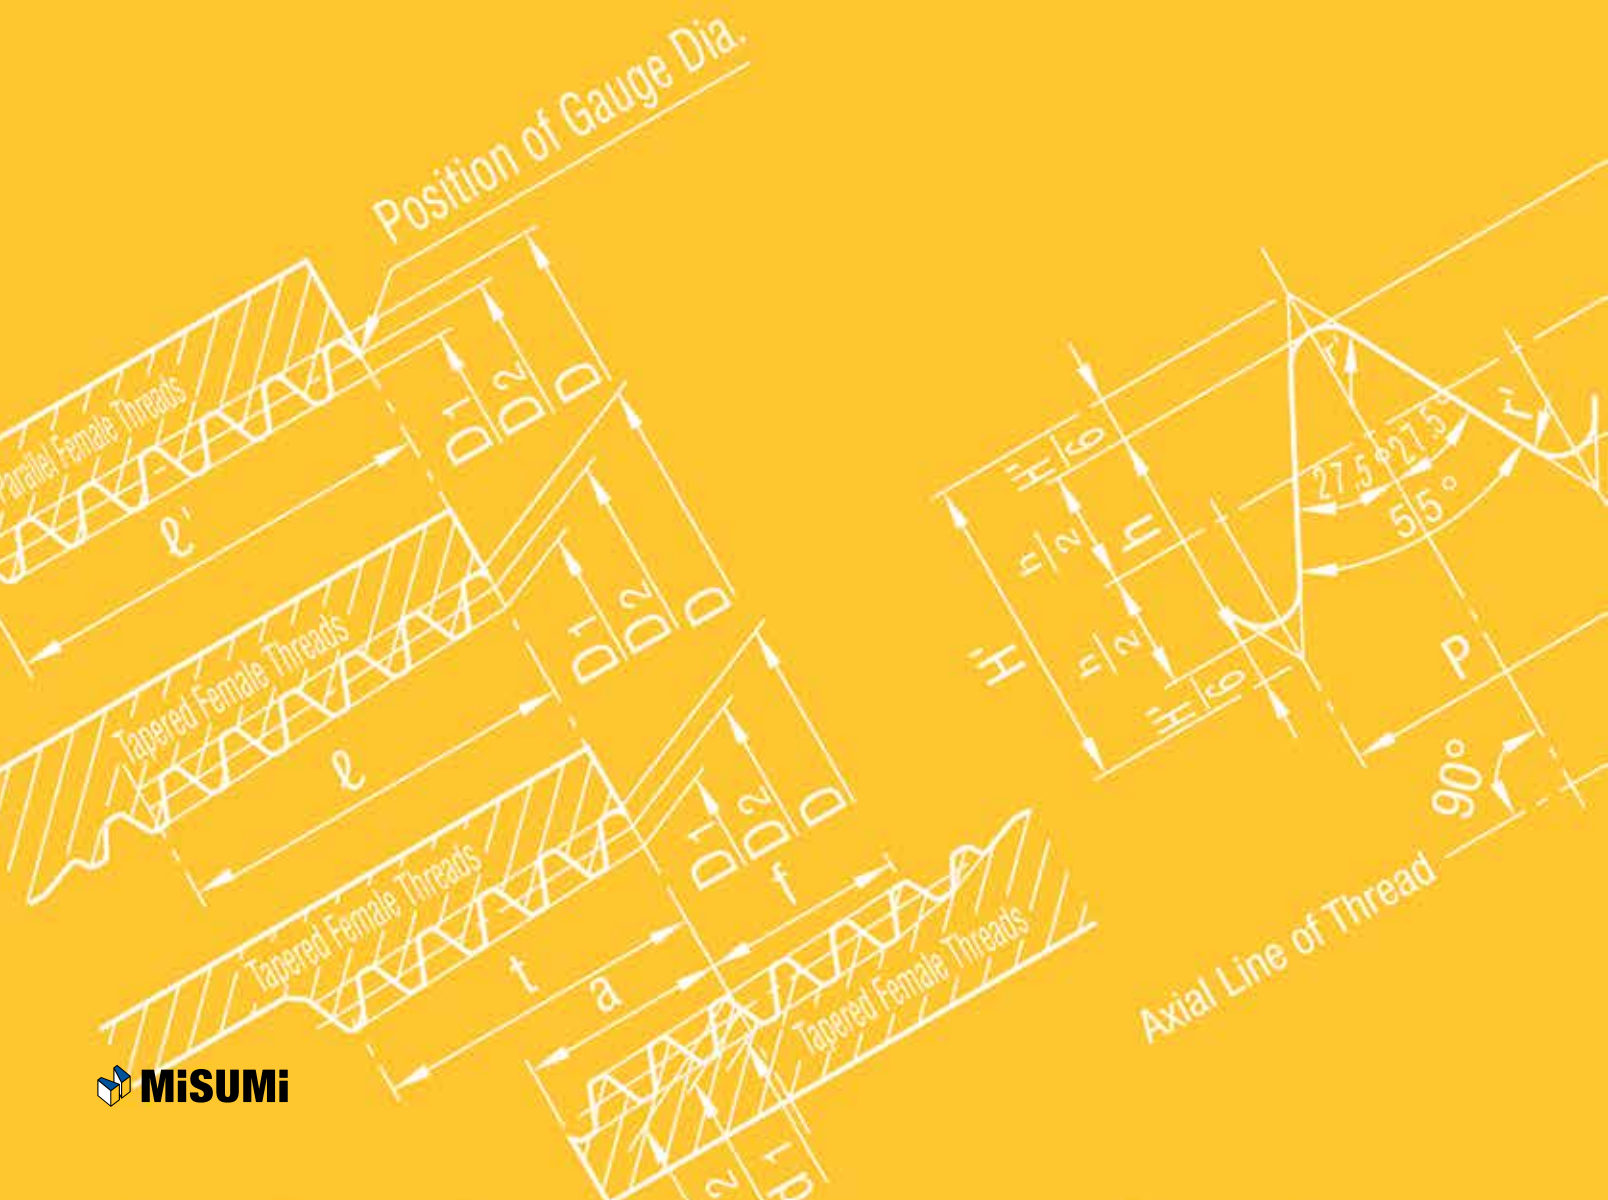

# TECHNICAL DATA

---

SI (International System of Units)	<b>206–207</b>	Drawing Indications of Surface Texture	<b>271</b>
Quantifiers, Unit Symbols, Chemical Symbols and Symbols of Elements		Hardness Conversion Table	<b>272</b>
Calculation of Cubic Volume and Weight / Physical Properties of Materials	<b>208</b>	Metric Coarse Screw Threads	<b>273</b>
Calculation of Area, Center of Gravity and Geometrical Moment of Inertia	<b>209</b>	Metric Fine Screw Threads	<b>274</b>
Roughness Ranges by Various Processes	<b>210</b>	Taper Pipe Threads	<b>275</b>
Geometric Tolerance Indications	<b>211</b>	Hexagon Socket Head Cap Screws	<b>276–277</b>
Selection of Ball Screws	<b>212–219</b>	Proper Bolt Axial Tightening Force and Proper Tightening Torque	<b>278</b>
Calculation of Life Span of Linear Systems	<b>220–223</b>	Strength of Bolts, Screw Plugs and Dowel Pins	<b>279</b>
Selection of Single Axis Actuators	<b>224–227</b>	Hexagon Socket Set Screws (Flat Type)	<b>280</b>
Radial Bearing (Class 0) Tolerances and Allowances	<b>228</b>	Hexagon Bolts	<b>281</b>
How to Use Coil Springs and Precautions	<b>229</b>	Hexagon Nuts / Cotter Pins	<b>282</b>
Spring Calculations	<b>230–231</b>	Spring Pins / Retaining Rings (E Type)	<b>283</b>
Designing of Chain Drive Mechanism	<b>232–239</b>	Retaining Rings (C Type)	<b>284–285</b>
Free Flow Chain / Table Top Chain Selection	<b>240</b>	Machine Keys and Key Grooves	<b>286–287</b>
Selection of Flat Belts	<b>241</b>	Varieties and Applications	<b>288–289</b>
Selection of Timing Belts	<b>242–263</b>	Hardening and Hardness Test Methods	<b>290</b>
Selection of Conveyor Timing Belts	<b>264</b>	Standard Material Sizes	<b>291–292</b>
Synchronous Belt Reference Information	<b>264</b>	Comparisons of Materials Between JIS and Foreign Standards	<b>293–294</b>
Synchronous Belt Replacement Indicators	<b>265</b>	Steel Brand Comparative Table / Hardness of Materials and Corresponding Tools	<b>295</b>
Pulley / Tooth Tolerance	<b>266</b>		
Regular Machining Dimension Tolerance	<b>267</b>		
Basis of Fitting Selection / Dimensional Tolerances and Fitting	<b>268</b>		
Dimension Tolerance for Regularly Used Fitting	<b>269</b>		
Surface Roughness	<b>270</b>		





# Technical Data

Excerpt from JIS Z 8203(2000)

## SI (International System of Units)

### 1. International System of Units (SI) and Usage

**1-1. Scope of Application** This standard specifies how to use the International System of Units(SI)and other international unitary systems, as well as units used in correlation with units from international systems, and other units which may be used.

**1-2. Terms and Definitions** Terminology used in this specification and definitions thereof are as follows.

**(1) International System of Units(SI)** Coherent system of units adopted and recommended by the International Committee on Weights and Measures.

It contains base units and supplementary units, units derived from them and their integral exponents to the 10th power.

**(2) SI Unit** Generic term used to describe base units, supplementary units or derived units of the International System of Units(SI).

**(3) 1 Base Unit** Those units are given in **Table 1**.

**(4) 2 Supplementary Units** Those supplementary units are given in **Table 2**.

**Table 1. Base Units**

Base Quantity	Unit	Symbol	Definition
Length	Meter	m	A meter is the length of the path traveled by light in a vacuum during a time interval of $\frac{1}{299\,792\,458}$ of a second.
Mass	Kilogram	kg	A kilogram is a unit of mass(neither weight nor force), it is equal to the mass of the international prototype of the kilogram.
Time	Second	s	A second is the duration of 9 192 631 770 periods of radiation corresponding to the transition between the two hyperfine levels of the ground state of the cesium 133 atom.
Current	Ampere	A	An ampere is that constant current which, if maintained in two straight parallel conductors of infinite length, of negligible circular cross-section, and placed 1 meter apart in a vacuum, would produce between these conductors a force equal to $2 \times 10^{-7}$ Newton per meter of length.
Thermodynamic Temperature	Kelvin	K	Kelvin, a unit of thermodynamic temperature, is the fraction $\frac{1}{273.16}$ of the thermodynamic temperature of the triple point of water.
Amount of Substance	Mole	mol	A mole is the amount of substance of a system that contains as many elementary particles(1) or aggregation of elementary particles as there are atoms in 0.012 kilogram of carbon 12 and when the mole is used, the elementary particles must be specified.
Luminance Intensity	Candela	cd	A candela is the luminous intensity, in a given direction, of a source that emits monochromatic radiation of frequency $540 \times 10^{12}$ hertz and that has a radiant intensity in that direction of $\frac{1}{683}$ watt per steradian.

Note<sup>1)</sup> The elementary particles here must be atoms, molecules, ions, electrons or other particles.

**Table 2. Supplementary Units**

Base Quantity	Unit	Symbol	Definition
Plane Angle	Radian	rad	A radian is the plane angle between two radii of a circle that cuts off an arc on the circumference equal in length to the radius.
Solid Angle	Steradian	sr	A steradian is the solid angle which, having its vertex in the center of a sphere, cuts off an area of the surface of the sphere equal to that of a square with sides equal in length to the radius of the sphere.

**(5)3 Derived Units** The supplementary units algebraically expressed using mathematical symbols such as plus, minus, etc. The SI derived units with special names and symbols are given in Table 3.

**Examples of SI Derived Units Expressed in Terms of Base Units**

Base Quantity	Base Quantity	
	Name	Symbol
Area	Square	m <sup>2</sup>
Volume	Cubic Meter	m <sup>3</sup>
Velocity	Meter/Second	m/s
Acceleration	Meter/Second <sup>2</sup>	m/s <sup>2</sup>
Wave Number	Every Meter	m <sup>-1</sup>
Density	Kilogram Every Cubic Meter	kg/m <sup>3</sup>
Current Density	Ampere Every Square Meter	A/m <sup>2</sup>
Magnetic Field Strength	Ampere Every Meter	A/m
Concentration (of Substance)	Mole Every Cubic Meter	mol/m <sup>3</sup>
Specific Volume	Cubic Meter Every Kilogram	m <sup>3</sup> /kg
Luminance	Candela Every Square Meter	cd/m <sup>2</sup>

**Table 3. SI Derived Units with Special Names and Symbols**

Base Quantity	Base Quantity		Expression in Terms of Base Units or Supplementary Units, Supplementary Units or Other SI Units
	Name	Symbol	
Frequency	Hertz	Hz	1 Hz =1 s <sup>-1</sup>
Force	Newton	N	1 N =1 kg·m/s <sup>2</sup>
Pressure, Stress	Pascal	Pa	1 Pa =1 N/m <sup>2</sup>
Energy, Work, Heat Quantity	Joule	J	1 J =1 N·m
Work Rate, Process Rate, Power, Electric Power	Watt	W	1 W =1 J/s
Electric Charge, Quantity of Electricity	Coulomb	C	1 C =1 A·s
Electric Potential, Potential Difference, Voltage, Electromotive Force	Volts	V	1 V =1 J/C
Electrostatic Capacity, Capacitance	Farad	F	1 F =1 C/V
Electric Resistance	Ohm	Ω	1 Ω =1 V/A
Conductance	Siemens	S	1 S =1 Ω <sup>-1</sup>
Magnetic Flux	Weber	Wb	1 Wb =1 V·s
Magnetic Flux Density	Tesla	T	1 T =1 Wb/m <sup>2</sup>
Inductance	Henry	H	1 H =1 Wb/A
Celsius Temperature	Degree Celsius or Degree	°C	1 °C =(t+273.15)k
Luminous Flux	Lumen	lm	1 lm =1 cd·sr
Illuminance	Lux	lx	1 lx =1 lm/m <sup>2</sup>
Radioactivity	Becquerel	Bq	1 Bq =1 s <sup>-1</sup>
Absorbed Dose	Gray	Gy	1 Gy =1 J/kg
Dose Equivalent	Sievert	Sv	1 Sv =1 J/kg



1-3. Multiples of 10 of SI Units

(1)Prefix The multiples and the names and symbols of prefixes to express integer multiples of 10 of SI Units are shown in Table 4.

Table 4. Prefix

Multiples of Unit	Prefix		Multiples of Unit	Prefix		Multiples of Unit	Prefix	
	Name	Symbol		Name	Symbol		Name	Symbol
10 <sup>18</sup>	Exsa	E	10 <sup>2</sup>	Hecto	h	10 <sup>-9</sup>	Nano	n
10 <sup>15</sup>	Peta	P	10 <sup>1</sup>	Deca	da	10 <sup>-12</sup>	Pico	p
10 <sup>12</sup>	Tera	T	10 <sup>-1</sup>	Deci	d	10 <sup>-15</sup>	Femto	f
10 <sup>9</sup>	Giga	G	10 <sup>-2</sup>	Centi	c	10 <sup>-18</sup>	Atto	a
10 <sup>6</sup>	Mega	M	10 <sup>-3</sup>	Milli	m			
10 <sup>3</sup>	Kilo	k	10 <sup>-6</sup>	Micro	μ			

2. Conversion Tables for SI and Conventional Units

(The units enclosed by thick lines are the SI units.)

Force	N	lbf	kgf
	1	0.22481	1.01972×10 <sup>-1</sup>
	4.448	1	0.4536
	9.806 65	2.205	1

Viscosity	Pa·s	cP	Lb/ft.S
	1	1×10 <sup>3</sup>	0.0672
	1×10 <sup>-3</sup>	1	0.000672
	14.88	1488	1

Note: 1P=1dyn·s/cm<sup>2</sup>=1g/cm·s  
1Pa·s=1N·s/m<sup>2</sup>, 1cP=1mPa·s

Stress	Pa or N/m <sup>2</sup>	MPa or N/mm <sup>2</sup>	PSI (lbf/in <sup>2</sup> )	kgf/cm <sup>2</sup>
	1	1×10 <sup>-6</sup>	0.000145	1.01972×10 <sup>-5</sup>
	1×10 <sup>6</sup>	1	145	1.01972×10
	6894.76	0.006894	1	0.0703
9.80665×10 <sup>4</sup>	9.80665×10 <sup>-2</sup>	14.22	1	

Kinematic Viscosity	m <sup>2</sup> /s	cSt	in <sup>2</sup> /s
	1	1×10 <sup>-3</sup>	1550.0031
	1×10 <sup>-6</sup>	1	0.00155
	0.000645	645.16	1

Note: 1St=1cm<sup>2</sup>/s, 1cSt=1mm<sup>2</sup>/s

Note: 1Pa=1N/m<sup>2</sup>, 1MPa=1N/mm<sup>2</sup>

Pressure	Pa	kPa	MPa	bar	kgf/cm <sup>2</sup>	PSI (lbf/in <sup>2</sup> )	mmH <sub>2</sub> O	mmHg or Torr
	1	1×10 <sup>-3</sup>	1×10 <sup>-6</sup>	1×10 <sup>-5</sup>	1.019 72×10 <sup>-5</sup>	0.000145	1.019 72×10 <sup>-1</sup>	7.500 62×10 <sup>-3</sup>
	1×10 <sup>3</sup>	1	1×10 <sup>-3</sup>	1×10 <sup>-2</sup>	1.019 72×10 <sup>-2</sup>	0.145	1.019 72×10 <sup>2</sup>	7.500 62
	1×10 <sup>6</sup>	1×10 <sup>3</sup>	1	1×10	1.019 72×10	145	1.019 72×10 <sup>5</sup>	7.500 62×10 <sup>3</sup>
	1×10 <sup>5</sup>	1×10 <sup>2</sup>	1×10 <sup>-1</sup>	1	1.019 72	14.5	1.019 72×10 <sup>4</sup>	7.500 62×10 <sup>2</sup>
	9.806 65×10 <sup>4</sup>	9.806 65×10	9.806 65×10 <sup>-2</sup>	9.806 65×10 <sup>-1</sup>	1	14.22	1×10 <sup>4</sup>	7.355 59×10 <sup>2</sup>
	6894.76	6.894	0.006894	0.06894	0.0703	1	703.07	51.715
	9.806 65	9.806 65×10 <sup>-3</sup>	9.806 65×10 <sup>-6</sup>	9.806 65×10 <sup>-5</sup>	1×10 <sup>-4</sup>	0.001422	1	7.355 59×10 <sup>-2</sup>
1.333 22×10 <sup>2</sup>	1.333 22×10 <sup>-1</sup>	1.333 22×10 <sup>-4</sup>	1.333 22×10 <sup>-3</sup>	1.359 51×10 <sup>-3</sup>	0.01934	1.359 51×10	1	

Note: 1Pa=1N/m<sup>2</sup>

Work, Energy, Heat Quantity	J	ft·lbs	kgf·m	kcal
	1	0.7376	1.019 72×10 <sup>-1</sup>	2.388 89×10 <sup>-4</sup>
	1.356	1	0.1391	0.0003
	9.806 65	7.188	1	2.342 70×10 <sup>-3</sup>
4.186 05×10 <sup>3</sup>	3088	4.268 58×10 <sup>2</sup>	1	

Note: 1Pa=1N/m<sup>2</sup>, 1MPa=1N/mm<sup>2</sup>

Thermal Conductivity	W/(m·K)	kcal/(h·m <sup>2</sup> ·°C)
	1	8.600 0×10 <sup>-1</sup>
	1.162 79	1

Coefficient of Heat Transfer	W/(m <sup>2</sup> ·K)	kcal/(h·m <sup>2</sup> ·°C)
	1	8.600 0×10 <sup>-1</sup>
	1.162 79	1

Power Heat Flow	W	fl·lbs	hp	kcal/h
	1	0.7376	0.00136	8.600 0×10 <sup>-1</sup>
	1.356	1	0.001843	1.166
	735.5	542.5	1	632.4
1.162 79	0.00136	0.001581	1	

Specific Heat	J/(kg·K)	kcal/(kg·°C) cal/(g·°C)
	1	2.388 89×10 <sup>-4</sup>
	4.186 05×10 <sup>3</sup>	1

Note: Note 1W=1J/s,



# Technical Data

Excerpts from JIS Z 8202

## Quantifiers, Unit Symbols, Chemical Symbols and Symbols of Elements Calculation of Cubic Volume and Weight / Physical Properties of Materials

### ■ Greek Symbols

Uppercase	Lowercase	Pronunciation	Conventional Usage
A	α	alpha	Angle, Coefficient
B	β	beta	Angle, Coefficient
Γ	γ	gamma	Angle, Weight Per Unit Area, Relationship (Uppercase)
Δ	δ	delta	Small Change, Density, Displacement
E	ε	epsilon	Small Amount, Distortion
Z	ζ	zeta	Variable
H	η	eta	Variable
Θ	θ	theta	Angle, Temperature, Time
I	ι	iota	
K	κ	kappa	Radius of Gyration
Λ	λ	lambda	Wavelength, Characteristic Value
M	μ	mu	Friction Coefficient 10 <sup>-6</sup> (Micro)
N	ν	nu	Frequency
Ξ	ξ	xi	Variable
O	ο	omicron	
Π	π	pi	Circle Ratio (3.14159...) Angle Symbol of Product (Uppercase)
P	ρ	rho	Radius, Density
Σ	σ	sigma	Stress, Standard Deviation Summation (Uppercase)
T	τ	tau	Time Constant, Time, Torque
Υ	υ	upsilon	
Φ	φ, ϕ	phi	Angle, Function, Diameter
X	χ	chi	
Ψ	ψ	psi	Angle, Function
Ω	ω	omega	Angular Velocity=2πf Ohm:Unit of Electric Resistance (Uppercase)

Reference unless otherwise specified, lowercase letters are the norm.

### ■ Name of Elements and Atomic Symbols

Atomic Number	Name	Symbol	Atomic Number	Name	Symbol
1	Hydrogen	H	53	Iodine	I
2	Helium	He	54	Xenon	Xe
3	Lithium	Li	55	Cesium	Cs
4	Beryllium	Be	56	Barium	Ba
5	Boron	B	57	Lanthanum	La
6	Carbon	C	58	Cerium	Ce
7	Nitrogen	N	59	Praseodymium	Pr
8	Oxygen	O	60	Neodymium	Nd
9	Fluorine	F	61	Promethium	Pm
10	Neon	Ne	62	Samarium	Sm
11	Sodium	Na	63	Europium	Eu
12	Magnesium	Mg	64	Gadolinium	Gd
13	Aluminum	Al	65	Terbium	Tb
14	Silicon	Si	66	Dysprosium	Dy
15	Phosphorous	P	67	Holmium	Ho
16	Sulfur	S	68	Erbium	Er
17	Chlorine	Cl	69	Thulium	Tm
18	Argon	Ar	70	Ytterbium	Yb
19	Potassium	K	71	Lutetium	Lu
20	Calcium	Ca	72	Hafnium	Hf
21	Scandium	Sc	73	Tantalum	Ta
22	Titanium	Ti	74	Tungsten	W
23	Vanadium	V	75	Rhenium	Re
24	Chromium	Cr	76	Osmium	Os
25	Manganese	Mn	77	Iridium	Ir
26	Iron	Fe	78	Platinum	Pt
27	Cobalt	Co	79	Gold	Au
28	Nickel	Ni	80	Mercury	Hg
29	Copper	Cu	81	Thallium	Tl
30	Zinc	Zn	82	Lead	Pb
31	Gallium	Ga	83	Bismuth	Bi
32	Germanium	Ge	84	Polonium	Po
33	Arsenic	As	85	Astatine	At
34	Selenium	Se	86	Radon	Rn
35	Bromine	Br	87	Francium	Fr
36	Krypton	Kr	88	Radium	Ra
37	Rubidium	Rb	89	Actinium	Ac
38	Strontium	Sr	90	Thorium	Th
39	Yttrium	Y	91	Protactinium	Pa
40	Zirconium	Zr	92	Uranium	U
41	Niobium	Nb	93	Neptunium	Np
42	Molybdenum	Mo	94	Plutonium	Pu
43	Technetium	Tc	95	Americium	Am
44	Ruthenium	R	96	Curium	Cm
45	Rhodium	Rh	97	Berkelium	Bk
46	Palladium	Pd	98	Californium	Cf
47	Silver	Ag	99	Einsteinium	Es
48	Cadmium	Cd	100	Fermium	Fm
49	Indium	In	101	Mendelevium	Md
50	Tin	Sn	102	Nobelium	No
51	Antimony	Sb	103	Lawrencium	Lr
52	Tellurium	T			

Reference

This table is based on Appendix A (Names and Symbols of Elements) of ISO 31/8-1980 (Amounts and Units of Physical Chemistry and Molecular Physics) and Appendix C (Names and Symbols of Radionuclides) of ISO 31/9-1980 (Amounts and Units of Atomic Physics and Nuclear Physics).

### ■ Characteristics of Materials

Material	Specific Gravity	Thermal Expansion Coefficient		Young's Modulus {Kgf/mm <sup>2</sup> }
		×10 <sup>-6</sup> /°C		
Mild Steel	7.85	11.7		21000
NAK30	7.8	12.5		20500
SKD11	7.85	11.7		21000
SKD61	7.75	10.8		21000
SKH51	8.2	10.1		22300
Carbide V30	14.1	6.0		56000
Carbide V40	13.9	6.0		54000
Cast Iron	7.3	9.2~11.8		7500~10500
SUS304	8.0	17.3		19700
SUS440C	7.78	10.2		20400
Oxygen Free Coppers C1020	8.9	17.6		11700
6/4 Brass C2801	8.4	20.8		10300
Beryllium Copper C1720	8.3	17.1		13000
Aluminum A1100	2.7	23.6		6900
Duralumin A7075	2.8	23.6		7200
Titanium	4.5	8.4		10600

### ■ How to Calculate the Volume

Solid	Volume V	Solid	Volume V	Solid	Volume V	Solid	Volume V
<p>Truncated Cylinder</p> $V = \frac{\pi}{4} d^2 h$ $= \frac{\pi}{4} d^2 \left( \frac{h_1 + h_2}{2} \right)$	<p>Oval Ring</p> $V = \frac{\pi^2}{4} d^2 \frac{\sqrt{a^2 + b^2}}{2}$	<p>Spherical Segment</p> $V = \frac{2}{3} \pi r^2 h$ $= 2.0944 r^2 h$	<p>Spherical Belt</p> $V = \frac{\pi h}{6} (3a^2 + 3b^2 + h^2)$				
<p>Pyramid</p> $V = \frac{h}{3} A = \frac{h}{6} a r n$ <p>A=Area of Base r=Radius of inscribed circle a=Length of a side of a regular polygon n=Number of the sides of a regular polygon</p>	<p>Cross Cylinder</p> $V = \frac{\pi}{4} d^2 \left( l + l' - \frac{d}{3} \right)$	<p>Torus</p> $V = 2\pi^2 R r^2$ $= 19.739 R r^2$ $= \frac{\pi^2}{4} D d^2$ $= 2.4674 D d^2$	<p>Barrel</p> <p>When the circumference makes a curve equal to the circular arc, <math>V = \frac{\pi l}{12} (2D^2 + d^2)</math> When the circumference makes a curve equal to a parabolic line, <math>V = 0.209 l (2D^2 D d + 1/4 d^3)</math></p>				
<p>Spherical Crown</p> $V = \frac{\pi h^2}{3} (3r - h)$ $= \frac{\pi h}{6} (3a^2 + h^2)$ <p>a is the radius.</p>	<p>Hollow (Cylinder)</p> $V = \frac{\pi}{4} h (D^2 - d^2)$ $= \pi h (D - t)$ $= \pi h (d + t)$	<p>Circular Cone</p> $V = \frac{\pi}{3} r^2 h$ $= 1.0472 r^2 h$	<h3>■ How to Calculate the Weight</h3> <p>Weight W [g] = Volume [cm<sup>3</sup>] × Specific Gravity</p> <p>[Ex.] Material: Mild Steel</p> <p>D=Ø16 L=50mm the weight is:</p> $\text{The specific gravity of } W = \frac{\pi}{4} D^2 \times L \times W$ $= \frac{\pi}{4} \times 1.6^2 \times 5 \times 7.85$ $= 79 [g]$				
<p>Ellipsoid</p> $V = \frac{4}{3} \pi a b c$ <p>In case of spheroid (b=c)</p> $V = \frac{4}{3} \pi a b^2$	<p>Truncated Pyramid</p> $V = \frac{h}{3} (A + a + \sqrt{Aa})$ <p>A.a=Area of both ends</p>	<p>Sphere</p> $V = \frac{4}{3} \pi r^3 = 4.1888 r^3$ $= \frac{\pi}{6} d^3 = 0.5236 d^3$					





# Technical Data

## Calculation of Area, Center of Gravity and Geometrical Moment of Inertia

Cross Section	A	e	I	Z=I/e	Cross Section	A	e	I	Z=I/e
	$bh$	$\frac{h}{2}$	$\frac{bh^3}{12}$	$\frac{bh^2}{6}$		$\pi ab$	$a$	$\frac{\pi}{4} ba^3 = 0.7854 ba^3$	$\frac{\pi}{4} ba^2 = 0.7854 ba^2$
	$h^2$	$\frac{h}{2}$	$\frac{h^4}{12}$	$\frac{h^3}{6}$		$\frac{\pi}{2} r^2$	$e_1 = 0.4244r$ $e_2 = 0.5756r$	$\left(\frac{\pi}{8} - \frac{8}{9\pi}\right) r^4$ $= 0.1098r^4$	$Z_1 = 0.2587r^3$ $Z_2 = 0.1908r^3$
	$h^2$	$\frac{h}{2}\sqrt{2}$	$\frac{h^4}{12}$	$0.1179h^3 = \frac{\sqrt{2}}{12} h^3$		$\frac{\pi}{4} r^2$	$e_1 = 0.4244r$ $e_2 = 0.5756r$	$0.055r^4$	$Z_1 = 0.1296r^3$ $Z_2 = 0.0956r^3$
	$\frac{bh}{2}$	$\frac{2}{3}h$	$\frac{bh^3}{36}$	$\frac{bh^2}{24}$		$b(H-h)$	$\frac{H}{2}$	$\frac{b}{12}(H^3-h^3)$	$\frac{b}{6H}(H^3-h^3)$
	$(2b+b_1)\frac{h}{2}$	$\frac{1}{3} \times \frac{3b+2b_1}{2b+b_1} h$	$\frac{6b^2+6bb_1+b_1^2}{36(2b+b_1)} h^3$	$\frac{6b^2+6bb_1+b_1^2}{12(3b+2b_1)} h^2$		$A^2-a^2$	$\frac{A}{2}$	$\frac{A^4-a^4}{12}$	$\frac{1}{6} \frac{A^4-a^4}{A}$
	$\frac{3\sqrt{3}}{2} r^2$ $= 2.598r^2$	$\sqrt{\frac{3}{4}} r = 0.866r$	$\frac{5\sqrt{3}}{16} r^4 = 0.5413r^4$	$\frac{5}{8} r^3$		$A^2-a^2$	$\frac{A}{2}\sqrt{2}$	$\frac{A^4-a^4}{12}$	$\frac{A^4-a^4}{12A}\sqrt{2}$ $= \frac{0.1179(A^4-a^4)}{A}$
		$r$	$\frac{5\sqrt{3}}{16} r^4 = 0.5413r^4$	$\frac{5}{8} r^3$		$\frac{\pi}{4}(d_2^2-d_1^2)$	$\frac{d_2}{2}$	$\frac{\pi}{64}(d_2^4-d_1^4)$ $= \frac{\pi}{4}(R^4-r^4)$	$\frac{\pi}{32} \left(\frac{d_2^4-d_1^4}{d_2}\right)$ $= \frac{\pi}{4} \times \frac{R^4-r^4}{R}$
	$2.828r^2$	$0.924r^2$	$\frac{1+2\sqrt{2}}{6} r^4$ $= 0.6381r^4$	$0.6906r^3$		$a^2 - \frac{\pi d^2}{4}$	$\frac{a}{2}$	$\frac{1}{12} \left(a^4 - \frac{3\pi}{16} d^4\right)$	$\frac{1}{6a} \left(a^4 - \frac{3\pi}{16} d^4\right)$
	$0.8284a^2$	$b = \frac{a}{1+\sqrt{2}}$ $= 0.4142a$	$0.0547a^4$	$0.1095a^3$		$2b(h-d) + \frac{\pi}{4} d^2$	$\frac{h}{2}$	$\frac{1}{12} \left\{ \frac{3\pi}{16} d^4 + b(h^3-d^3) + b^3(h-d) \right\}$	$\frac{1}{6h} \left\{ \frac{3\pi}{16} d^4 + b(h^3-d^3) + b^3(h-d) \right\}$
	$\pi r^2 = \frac{\pi d^2}{4}$	$\frac{d}{2}$	$\frac{\pi d^4}{64} = \frac{\pi r^4}{4}$ $= 0.0491d^4$ $= 0.05d^4$ $= 0.7854r^4$	$\frac{\pi d^3}{32} = \frac{\pi r^3}{4}$ $= 0.0982d^3$ $= 0.1d^3$ $= 0.7854r^3$		$2b(h-d) + \frac{\pi}{4}(d_1^2-d_2^2)$	$\frac{h}{2}$	$\frac{1}{12} \left\{ \frac{3\pi}{16} (d_1^4-d_2^4) + b(h^3-d_1^3) + b^3(h-d_1) \right\}$	$\frac{1}{6h} \left\{ \frac{3\pi}{16} (d_1^4-d_2^4) + b(h^3-d_1^3) + b^3(h-d_1) \right\}$
	$r^2 \left(1 - \frac{\pi}{4}\right)$ $= 0.2146r^2$	$e_1 = 0.2234r$ $e_2 = 0.7766r$	$0.0075r^4$	$\frac{0.0075r^4}{e_2}$ $= 0.00966r^3$ $= 0.01r^3$					

A : Sectional Area  
 e : Distance of Center of Gravity  
 I : Geometrical Moment of Inertia  
 Z=I/e : Cross Section Coefficient



# Technical Data

## Roughness Ranges by Various Processes

Arithmetic Average Roughness Ra		0.025	0.05	0.1	0.2	0.4	0.8	1.6	3.2	6.3	12.5	25	50	100		
Traditional Roughness Notations	Maximum Height Rmax.	0.1 -S	0.2 -S	0.4 -S	0.8 -S	1.6 -S	3.2 -S	6.3 -S	12.5 -S	25 -S	50 -S	100 -S	200 -S	400 -S		
	Reference Value of Standard Length (mm)	0.25				0.8				2.5			8		25	
	Finish Symbol	▽▽▽▽				▽▽▽				▽▽			▽		-	
	Processes															
Forging										Precise						
Casting										Precise						
Die Casting																
Hot Rolling																
Cold Rolling																
Drawing																
Extruding																
Tumbling																
Sand Blasting																
Rolling																
Face Milling										Precise						
Planing																
Carving / Slotting																
Milling										Precise						
Precision Boring																
Filing										Precise						
Round Turning										Precise	Fine	Medium	Course			
Boring										Precise						
Drilling																
Reaming										Precise						
Broaching										Precise						
Shaping																
Milling										Precise	Fine	Medium	Course			
Honing										Precise						
Stone Lapping										Precise						
Buff Finishing										Precise						
Fine Sanding										Precise						
Lapping										Precise						
Hydro Honing										Precise						
Burnishing																
Roller Finishing																
Sinker EDM																
Wire EDM																
Chemical Polishing										Precise						
Electropolishing										Precise						



# Technical Data

## Geometric Tolerance Indications

Excerpts from JIS B0021(1984)

### ■ Geometric Tolerances and Symbols

Tolerance Types	Symbols	Definition of Tolerance Zones	Illustrated Examples and Interpretations
Form Tolerance	Straightness	If the tolerance value is preceded by a $\varnothing$ symbol, this tolerance zone is the range within a cylinder of diameter $t$ .	If a tolerance frame is connected to a dimension that indicates the diameter of a cylinder, the axis line of the cylinder shall be contained within a cylinder of 0.08mm diameter.
	Flatness	The tolerance zone is the area between two parallel planes separated by distance $t$ .	This surface shall be contained within two parallel planes separated by 0.08mm.
	Circularity	The tolerance zone in the subject plane is the area between two concentric circles separated by distance $t$ .	The circumference of arbitrary axis perpendicular cross sections shall be contained between two concentric circles separated by 0.1mm on the same plane.
	Cylindricity	The tolerance zone is the range contained between two coaxial cylinder surfaces separated by distance $t$ .	The subject surface shall be contained between two coaxial cylinder surfaces separated by 0.1mm.
	Profile of Line	The tolerance zone is the range contained between the two enveloping lines formed by a circle with diameter $t$ with the center located on the theoretically correct profile curve.	On arbitrary cross-sections parallel to the projection plane, the subject profile shall be contained between the two envelope lines formed by a 0.04mm diameter circle with the center located on the theoretically correct profile curve.
	Profile of Surface	The tolerance zone is the range contained between the two enveloping surfaces formed by a sphere with diameter $t$ with the center located on the theoretically correct profile surface.	The subject surface shall be contained between the two enveloping surfaces formed by a 0.02mm diameter sphere with the center located on the surface containing the theoretically correct profile.
Orientation Tolerance	Parallelism	The tolerance zone is the range contained between two planes parallel to the datum plane separated by distance $t$ .	The surface indicated by the arrow leader shall be contained between two planes parallel to the datum plane A separated by 0.01mm in the direction of the arrow leader.
	Perpendicularity Tolerance	If the tolerance value is preceded by a $\varnothing$ symbol, the tolerance zone is the range contained within a cylinder of diameter $t$ perpendicular to the datum plane.	The axis of the cylinder indicated by the arrow leader shall be contained within a 0.01mm cylinder perpendicular to the datum plane A.
	Angularity	The tolerance zone is the range contained between two parallel planes inclined at a specified angle to the datum plane and separated from each other by distance $t$ .	The surface indicated by the arrow leader shall be contained between two parallel planes inclined theoretically exactly to 40 degrees to the datum plane A, and separated by 0.08mm in the direction of the arrow of the leader.
Positional Tolerance	Positional Tolerance	The tolerance zone is the range contained within a circle or sphere of diameter $t$ with its center located at theoretically true location of the subject point (True Position).	The point indicated by the arrow leader shall be contained within a 0.03mm diameter circle with its center located at the true location 60mm from the datum line A, and 100mm from the datum line B.
	Coaxiality or Concentricity	If the tolerance value is preceded by a $\varnothing$ symbol, the tolerance zone is the range within a cylinder of diameter $t$ with axis coinciding matching the datum axis line.	The axis of the cylinder indicated by the arrow leader shall be contained within a cylinder of diameter 0.01mm with axis coinciding the datum axis line A.
	Symmetry	The tolerance zone is the range contained between two parallel planes separated by distance $t$ and located symmetrically with relation to the datum plane.	The central plane indicated by the arrow leader shall be contained between two parallel planes separated by 0.08mm and located symmetrically in relation to the datum plane A.
Runout Tolerance	Runout Tolerance	The tolerance zone is an arbitrary surface perpendicular to the datum axis between two concentric cylinders with centers common with the datum axis, separated in radial direction by the distance $t$ .	The radial run-out of the cylinder surface indicated by the arrow leader shall not exceed 0.1mm on any measuring plane perpendicular to the datum axis line when the cylinder is rotated about the datum axis A-B.
	Total Runout	The tolerance zone is between two concentric cylinders with centers common with the datum axis, separated in radial direction by distance $t$ .	The total radial runout of the cylinder surface indicated by the arrow leader shall not exceed 0.1mm at any point on the cylinder surface when the cylinder is rotated about the datum axis A-B.

The lines used in the Tolerance Zone definitions mean the following.

Thick solid or broken line: Shape    Thin dash-dot line: Center line    Thick dash-dot line: Datum    Thin alternating long and two short dashed line: Supplementary projection plane or cross section plane  
Thin solid or broken line: Tolerance range    Thick alternating long and two short dashed line: Projection of shape onto supplementary plane or cross section plane




# Technical Data

## Selection of Ball Screws 1

### 1. Ball Screw Selection Procedure

Basic ball screw selection procedure and required evaluation items are shown below.

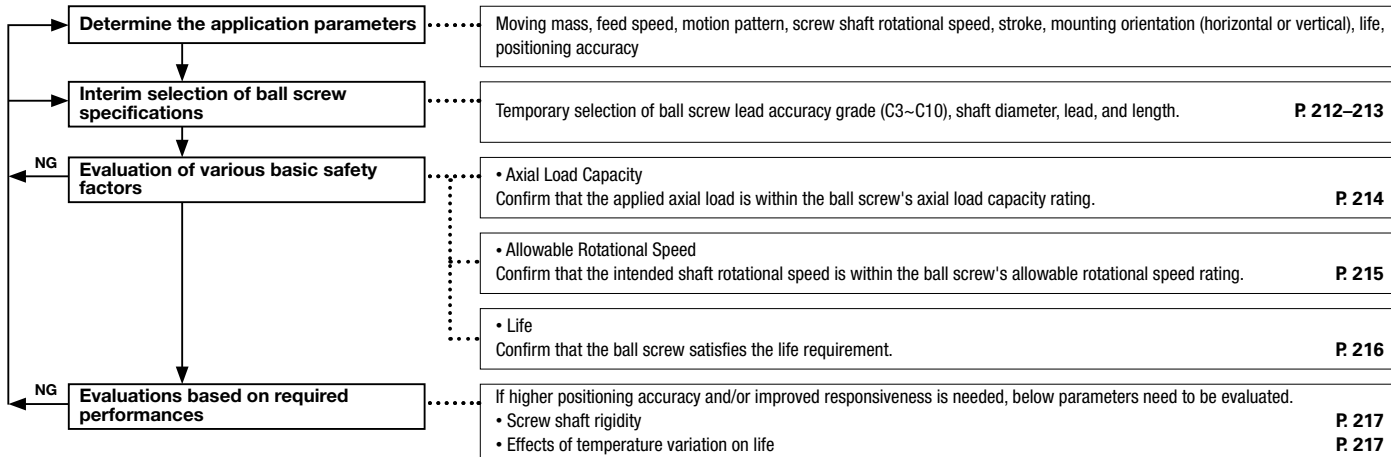


### 2. Ball Screw Lead Accuracy

Ball screw lead accuracy is defined by JIS Standards property parameters (ep, vu, v300, v2π).

Parameter definitions and allowable values are shown below.

In general, a ball screw lead accuracy grade is selected by evaluating if the Actual Mean Travel Error of a candidate is within the allowable positioning error.

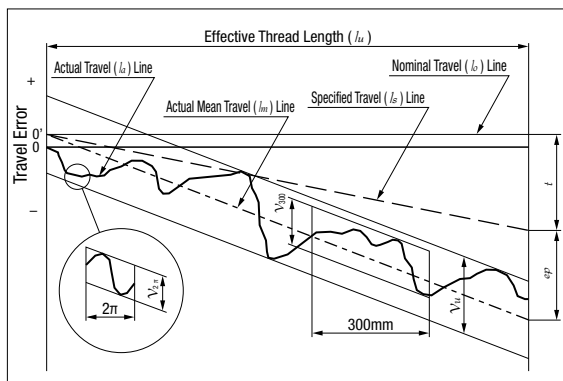

Terms	Symbols	Meaning
<b>Actual Mean Travel Error</b>	ep	A value that is Specified Travel subtracted from Actual Mean Travel.
<b>Variation</b>	vu	The maximum difference of the actual travel contained between two lines drawn parallel to the actual mean travel, and is defined by three parameters below. Variation for the effective thread length of screw shaft.
	v300	Variation for an arbitrarily taken length of 300mm within the effective thread length of screw shaft.
	v2π	Variation for an arbitrary one revolution (2πrad) taken within the effective thread length of screw shaft.
<b>Specified Travel</b>	ls	Axial travel compensated for temperature rise and loading conditions, in relation to the Nominal Travel (Lead).
<b>Specified Travel Target Value</b>	l	A value that is Nominal Travel subtracted from Specified Travel, over the effective thread length. This value is set to compensate for possible screw shaft expansion and contraction due to temperature changes and applied loads. The value is to be determined based on experiments or experiences.
<b>Actual Travel</b>	la	Actually measured travel distance
<b>Actual Mean Travel</b>	lm	A straight line representing the actual travel trend. A straight line obtained by the least-squares method or other approximation methods from the curve representing the actual travel.

■ **Table 1. Positioning Screw (C Class) Actual Mean Travel Error (±ep) and Variation (u) allowances** Unit : μm

Thread Effective Length (mm)		Accuracy Grade			
Over	or Less	C3		C5	
		Actual Mean Travel Error	Variation	Actual Mean Travel Error	Variation
	315	12	8	23	18
315	400	13	10	25	20
400	500	15	10	27	20
500	630	16	12	30	23
630	800	18	13	35	25
800	1000	21	15	40	27
1000	1250	24	16	46	30
1250	1600	29	18	54	35

■ **Table 2. Positioning Screws (C Class) variation per 300mm (300) Variation per rotation (2π) standard values** Unit : μm

Accuracy Grade	C3		C5	
Parameters	V300	V2π	V300	V2π
Standard Values	8	6	18	8

■ **Table 3. Transfer Screw (Ct Class) variation per 300mm (300) Standards** Unit : μm

Accuracy Grade	Ct7	Ct10
V300	52	210

Actual Mean Travel Error (ep) for Transfer Screws (Ct Class) is calculated as ep=2Lu/300-V300

**3. Axial Clearances of Ball Screws**

Axial clearance does not affect positioning accuracy if the feed is unidirectional, but will generate backlash and negatively affect on positioning accuracy if the direction or the axial load is reversed.

■ **Table 4. Axial Clearances of Rolled Ball Screws**

Types	Prod. Example	Screw Shaft Dia.	Lead	Axial Clearance (mm)	
Standard Nut Accuracy Grade C7	BSST	8	2	0.03 or less	
		10	4		
		12	4		
		15	5		
			10		
			20		
		20	5	0.05 or less	
			10	0.03 or less	
			20	0.07 or less	
		Standard Nut Accuracy Grade C10	BSSZ BSSR	8	2
10	4				
	2				
	4				
12	4			0.10 or less	
	10				
14	5				
	5				
15	10				
	20				
	5				
20	10				0.15 or less
	20				0.10 or less
	5				
25	10			0.20 or less	
	25			0.12 or less	
	28	0.10 or less			
	32	0.20 or less			
Compact Nut Accuracy Grade C10	BSSC	8	2	0.05 or less	
		10	2		
		12	4		
		15	5	0.10 or less	
			10		
			5		
		20	10		
			5		
		25	5		
		Block Nut Accuracy Grade C10	BSBR	15	5
20					
25					
15	10				
20					
25					

**Selection Example of Lead Accuracy**

- <Requirements>
- Ball screw diameter Ø15, lead 20
  - Stroke 720mm
  - Positioning accuracy ±0.05mm / 720mm

<Selection Details>  
Select an appropriate lead accuracy grade based on the application requirements.

- Evaluating the screw thread length  
Stroke+Nut Length+Margin=720+62+60=842  
\*The Margin shown above is an overrun buffer, and normally determined as 1.5~2 times the screw lead.  
Lead 20 x 1.5 x 2 (both ends)=60
- Evaluating the lead accuracy  
P. 212 Table 1. is referenced and an Actual Mean Travel Error ±ep for 842mm ball screw thread.  
C3 ... ±0.021mm / 800~1000mm  
C5 ... ±0.040mm / 800~1000mm
- Determining the lead accuracy  
It can be determined that a C5 grade (±0.040 / 800~1000mm) ball screw can satisfy the required positioning accuracy of ±0.05 / 720mm.

■ **Table 5. Axial Clearances of Precision Ball Screw**

Types	Prod. Example	Screw Shaft Dia.	Lead	Axial Clearance (mm)
Standard Nut Accuracy Grade C3	BSX	6	1	0 (Preloaded)
		8	1	
			2	
		10	2	
		12	2	
		15	5	
Standard Nut Accuracy Grade C5	BSS (BSL)	8	2	0.005 or less
		10	2	
			4	
			10	
		12	4	
			5	
			10	
		15	5	0.010 or less
			10	
			20	
			40	
		20	5	0.005 or less
			10	
			20	
			40	
			5	
10				
Standard Nut Accuracy Grade C7	BSSE	8	2	0.030 or less
		10	2	
			4	
		12	2	
			5	
			10	
		15	5	
			10	
			20	
		20	5	
10				
20				
10				
25	10			
	20			

**Selection Example of Axial Clearance**

- <Requirements>
- Ball screw diameter Ø15, lead 5.
  - Allowable backlash ±0.01mm

<Selection Details>  
From Table 5., it can be determined that C5 grade with 0.005mm or less axial clearance satisfies the allowable backlash amount of 0.01mm for the Ø15 group.



# Technical Data

## Selection of Ball Screws 2

### 4. Allowable Axial Load

Allowable Axial Load is a load with a safety margin built-in against a shaft buckling load.

Axial load that applies to a ball screw needs to be less than Allowable Maximum Axial Load.

Allowable Axial Load can be obtained by the following formula.

Additionally, approximate Allowable Axial Load can be obtained from Table 1. Allowable Axial Load Graph.

#### Allowable Axial Load (P)

$$P = \frac{n\pi^2 EI}{\ell^2} \alpha = m \frac{d^4}{\ell^2} \times 10^4 (N)$$

Where:

P: Allowable Axial Load (N)

ℓ: Distance between Points of Buckling Load (mm)

E: Young's Modulus ( $2.06 \times 10^5 \text{ N/mm}^2$ )

I: Min. Geometrical Moment of Inertia of Across Root Thread Area ( $\text{mm}^4$ )

$$I = \frac{\pi}{64} d^4$$

d : Thread Root Diameter (mm)

n, m : Coefficient Determined by Method of Screw Support

Method of Screw Support	n	m
Support – Support	1	5
Fixed – Support	2	10
Fixed – Fixed	4	19.9
Fixed – Free	0.25	1.2

α : Safety Factor = 0.5

For higher safety, a higher safety factor should be required.

#### Allowable Axial Load Calculation Example

Find the Allowable Axial Load for Figure 1.

<How to Use>

- Thread shaft diameter Ø15, Lead 5
- Mounting method Fixed – Support
- Distance between Points of Buckling Load ℓ, 820mm
- Screw Shaft Root Diameter d 12.5

<Calculations>

g=15.1 since the mounting method is Fixed – Supported, the Allowable Rotational Speed (Nc) is,

$$P = m \frac{d^4}{\ell^2} \times 10^4 = 10 \times \frac{12.5^4}{820^2} \times 10^4 = 3630(N)$$

Therefore, the rotational speed will need to be  $3024\text{min}^{-1}$  or less.

Table 1.


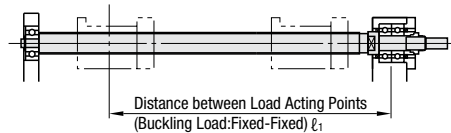


Figure 1. Allowable Axial Load Curve

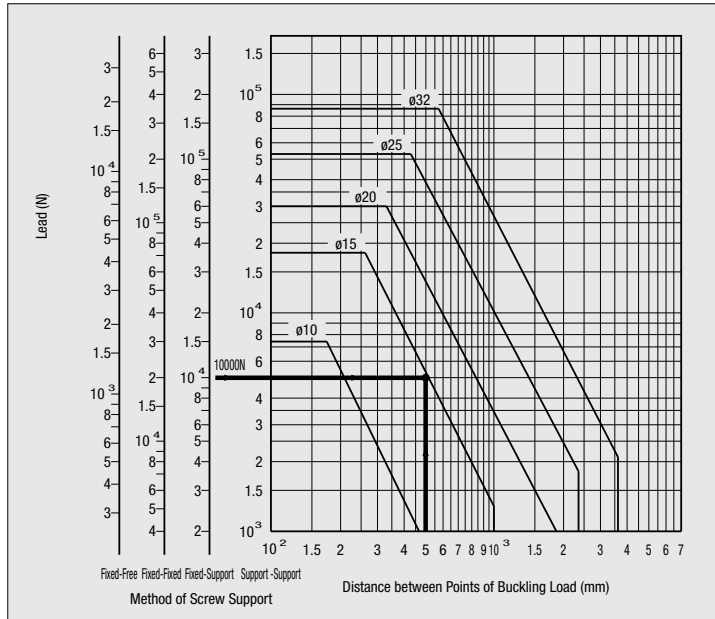

#### Screw Shaft Dia. Calculation Example

<Requirements>

- Distance between Points of Buckling Load 500mm
- Mounting method Fixed – Support
- the max. axial load 10000N

<Calculations>

- (1) Find the intersection between a distance of 500mm between load acting points and the axial load of 10000daN (from the fixed-support graduation). Figure 1.
- (2) Read the shaft diameter of the diagonal line nearest to the intersection on the outside. The shaft diameter can be a min. 15 mm.



### 5. Allowable Rotational Speed

Ball screw rotational speed is determined by required feed speed and the given screw lead, and needs to be less than the Allowable Maximum Rotational Speed.

Ball screw rotational speed is evaluated based on the shaft's critical speed and ball recirculation speed limitation DmN value.

#### 5-1. Critical Speed

Allowable rotational speed is defined as a speed 80% or less of the Critical Speed where the rotational speed coincides with a natural resonant frequency of the screw shaft.

The Allowable Rotational Speed can be obtained by the following formula.

Additionally, approximate Allowable Rotational Speeds can be obtained from Table 2. Allowable Maximum Rotational Speed Graph.

#### Allowable Rotational Speed (min<sup>-1</sup>)

$$N_c = f_a \frac{60\lambda^2}{2\pi\ell^2} \sqrt{\frac{EI \times 10^3}{\gamma}} = g \frac{d}{\ell^2} 10^7 \text{ (min}^{-1}\text{)}$$

Where:  
 ℓ: Distance of Supports (mm)  
 f<sub>a</sub>: Safety Factor (0.8)  
 E: Young's Modulus (2.06×10<sup>5</sup>N/mm<sup>2</sup>)  
 I: Min. Geometrical Moment of Inertia of Across Root Thread Area (mm<sup>4</sup>)  
 $I = \frac{\pi}{64} d^4$   
 d: Thread Root Diameter (mm)  
 γ: Specific Gravity (7.8×10<sup>-6</sup>kg/mm<sup>3</sup>)  
 A: Root Thread Section Area (mm<sup>2</sup>)  
 $A = \frac{\pi}{4} d^2$   
 g, λ: Coefficient Determined by Method of Screw Support

Method of Screw Support	g	λ
Support – Support	9.7	π
Fixed – Support	15.1	3.927
Fixed – Fixed	21.9	4.73
Fixed – Free	3.4	1.875

#### Allowable Rotational Speed Calculation Example

Find the Allowable Maximum Rotational Speed for Figure 2.

<How to use>

- Thread shaft diameter ø15, Lead 5
- Mounting method Fixed – Support
- Distance between Points of Buckling Load ℓ, 790mm

<Calculations>

g=15.1 since the mounting method is Fixed-Supported, the Allowable Rotational Speed (N<sub>c</sub>) is,

$$N_c = g \frac{d}{\ell^2} 10^7 \text{ (min}^{-1}\text{)} = 15.1 \times \frac{12.5}{790^2} \times 10^7 \text{ (min}^{-1}\text{)} = 3024 \text{ (min}^{-1}\text{)}$$

Therefore, the rotational speed will need to be 3024min<sup>-1</sup> or less.

Table 2.


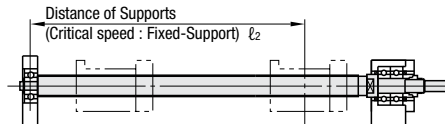


Figure 2. Allowable Rotational Speed Graph

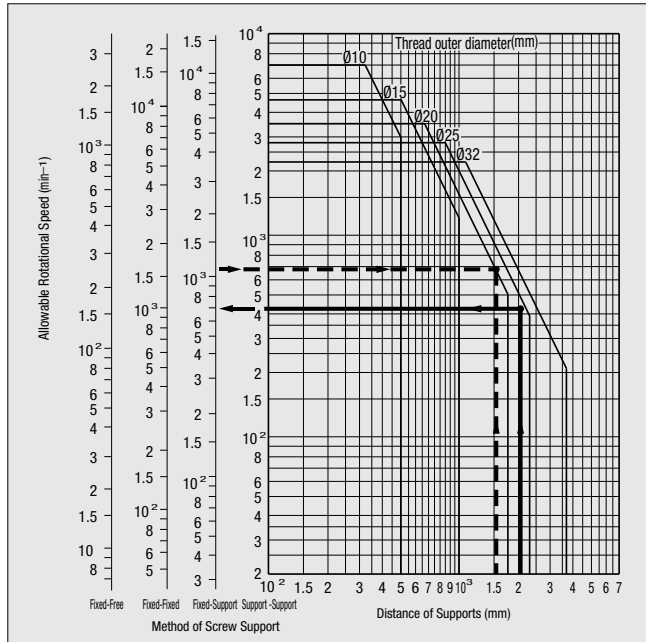

#### Allowable Rotational Speed Calculation Example

<Requirements>

- Thread outer diameter 20
- Distance of Supports 1500mm
- Mounting method Fixed – Support

<Calculations>

- (1) From Table 2., find a intersection of a vertical line from Supported Span Distance 1500mm and Screw Shaft O.D. Ø20 line.
- (2) The value 1076min<sup>-1</sup> on the Fixed-Supported scale (Y-Axis) that corresponds to the intersection of (1) above is the Allowable Maximum Speed.

#### Screw Shaft Dia. Calculation Example

<Requirements>

- Distance of Supports 2000mm
- Maximum Revolution Frequency 1000min<sup>-1</sup>
- the max. axial load Fixed – Fixed

<Calculations>

- (1) From Table 2., find a intersection of a vertical line from Supported Span Distance 2000mm and a horizontal line from Fixed-Fixed max. speed scale (Y-Axis) at 1000min<sup>-1</sup>.
- (2) A line that reaches down to the intersection in (1) is the Ø25 ball screw that satisfies the required speed of 1000min<sup>-1</sup>.

#### Allowable Rotational Speed (min<sup>-1</sup>)

D <sub>m</sub> N ≤ 70000 (Precision Ball Screws)		
D <sub>m</sub> N ≤ 50000 (Rolled Ball Screws)		
Where:	Ball Dia.	A Value
	1.5875	0.3
	2.3812	0.6
	3.175	0.8
D <sub>m</sub> : Thread outer diameter(mm)+A Value	4.7625	1.0
N: Maximum Revolution Frequency(min <sup>-1</sup> )	6.35	1.8

#### 5-2. DmN Value

The DmN value represents a ball recirculation (orbit) speed limit within a ball nut.

If this value is exceeded, the recirculation components will be damaged.



# Technical Data

## Selection of Ball Screws 3

### 6. Life Span

Ball screw's life is defined as: Total number of rotations, time, or distance where either the ball rolling surfaces or the balls begin to exhibit repetitive stress caused flaking. Ball screw's life can be calculated based on Basic Dynamic Load Rating with the following formula.

#### 6-1. Life Hours (Lh)

$$L_h = \frac{10^6}{60N_m} \left( \frac{C}{P_m f_w} \right)^3 \text{ (hrs)}$$

Where:

$L_h$ : Life Span Hours (hrs)

C: Basic Dynamic Load Rating (N)

$P_m$ : Mean Axial Load (N)

$N_m$ : Mean Revolution Frequency ( $\text{min}^{-1}$ )

$f_w$ : Work Factor

Impactless Run	$f_w = 1.0 \sim 1.2$
Normal Run	$f_w = 1.2 \sim 1.5$
Run with Impact	$f_w = 1.5 \sim 2.0$

• Basic Dynamic Load Rating: C

Basic Dynamic Load Rating (C) is defined as: An axial load which a group of same ball screws are subjected and 90% of the specimen will reach 1 million rotations ( $10^6$ ) without experiencing any flaking of the rolling surfaces. See product catalog pages for the Basic Dynamic Load Ratings.

\*Setting life span hours longer than what is actually necessary not only requires a larger ball screw, but also increases the price.

In general, the following standards are used for life span hours:

Machine Tools: 20,000hrs	Automatic Control Equipment: 15,000hrs
Industrial Machinery: 10,000hrs	Measuring Instruments: 15,000hrs

\*The basic dynamic load rating that satisfies the set life span hours is expressed by the following formula.

$$C = \left( \frac{60L_h N_m}{10^6} \right)^{\frac{1}{3}} P_m f_w (N)$$

#### Life Calculation Example

<Requirements>

- Ball Screw Model BSS1520( $\phi 15$  Lead 5)
- Mean Axial Load  $P_m$  250N
- Mean Revolution Frequency  $N_m$  2118 ( $\text{min}^{-1}$ )
- Work Factor  $f_w$  1.2

<Calculations>

Since Basic Dynamic Load Rating C for BSS1520 is 4400N,

$$L_h = \frac{10^6}{60 \times 2118} \left( \frac{4400}{250 \times 1.2} \right)^3 = 24824 \text{ (hr)}$$

Therefore, Life will be 24824 hours.

#### 6-2. Axial Load

Axial loads that apply on the screw shafts will vary depending on applicable motion profile such as acceleration, constant velocity, and deceleration phases. Following formula can be used.

-Axial Load Formula-

Constant Velocity . . . Axial Load ( $P_b$ ) =  $\mu Wg$

Acceleration . . . Axial Load ( $P_a$ ) =  $W\alpha + \mu Wg$

Deceleration . . . Axial Load ( $P_c$ ) =  $W\alpha - \mu Wg$

\* Omit the " $\mu$ " for vertical applications.

$\mu$ : Linear bearing friction coefficient (0.02 or Linear Guides)

W: Load Mass N

g: Gravitational Acceleration 9.8m/s<sup>2</sup>

$\alpha$ : Acceleration (\*)

(\*) Acceleration ( $\alpha$ ) =  $(V_{\text{max}}/t) \times 10^{-3}$

V<sub>max</sub>: Rapid Feed Rate mm/s

t: Acceleration/Deceleration Time s

#### 6-3. Formulae for Average Axial Load and Average Rotational Speed

Average Axial Load and Average Rotational Speed are calculated based on proportions of motion profiles.

Average Axial Load and Average Rotational Speed for Motion profiles in Table 1. can be calculated with the Formula 2.

**Table 1. Motion Profile** ( $t_1 + t_2 + t_3 = 100\%$ )

Motion Profile	Axial Load	Rotational Speed	Hours Ratio
A	$P_1 N$	$N_1 \text{min}^{-1}$	$t_1\%$
B	$P_2 N$	$N_2 \text{min}^{-1}$	$t_2\%$
C	$P_3 N$	$N_3 \text{min}^{-1}$	$t_3\%$

[Formula 2. Average Axial Load Calculation]

$$P_m = \left( \frac{P_1^3 N_1 t_1 + P_2^3 N_2 t_2 + P_3^3 N_3 t_3}{N_1 t_1 + N_2 t_2 + N_3 t_3} \right)^{\frac{1}{3}} (N)$$

$$N_m = \frac{N_1 t_1 + N_2 t_2 + N_3 t_3}{t_1 + t_2 + t_3} (\text{min}^{-1})$$

For case of a machine tool application, Max. Load (P1) would be for the heaviest cutting cycles, Regular Load (P2) is for the general cutting conditions, and Minimum Load (P3) is for the non-cutting rapid feeds during positioning moves.

#### Average Axial Load and Average Rotational Speed Calculation Example

<Requirements>

Motion Profile	Axial Load	Rotational Speed	Hours Ratio
A	343N	1500min	29.4%
B	10N	3000min	41.2%
C	324N	1500min	29.4%

<Calculations>

(1) Average Axial Load

$$P_m = \left( \frac{343^3 \times 1500 \times 0.294 + 10^3 \times 3000 \times 0.412 + 324^3 \times 1500 \times 0.294}{1500 \times 0.294 + 3000 \times 0.412 + 1500 \times 0.294} \right)^{\frac{1}{3}} = 250(N)$$

Therefore, the Average Axial Load  $P_m$  will be 250N.

(2) Average Rotational Speed

$$N_m = \frac{1500 \times 0.294 + 3000 \times 0.412 + 1500 \times 0.294}{0.294 + 0.412 + 0.294} = 2118 (\text{min}^{-1})$$

Therefore, the Average Rotational Speed  $N_m$  will be 2118min.





### 7. Screw Shaft Mounting Arrangements

Representative ball screw mounting arrangements are shown below.

Mounting Methods	Application Example
	<ul style="list-style-type: none"> <li>• Typical method</li> <li>• Medium ~ High Speeds</li> <li>• Medium ~ High Accuracy</li> <li>For Support Units, Standard Type BRW / BUR is selected</li> </ul>
	<ul style="list-style-type: none"> <li>• Medium Speeds</li> <li>• High Accuracy</li> <li>For Support Units, Standard Type BRW is selected</li> </ul>
	<ul style="list-style-type: none"> <li>• Low Speeds</li> <li>• For Short Screw Shafts</li> <li>• Medium Accuracy</li> <li>For Support Units, Economy Type BRWE is selected</li> </ul>

### 8. Temperature and Life

When ball screws are continuously used at 100°C or higher, or used momentarily at very high temperatures, Basic Dynamic/Static Load Ratings will be reduced according to the temperature rise due to changes in material compositions.

However, there will be no effects up to 100°C. Basic Dynamic Load Rating C'' and Basic Static Load Rating Co'' at 100°C or higher with the temperature factors ft and ft' can be expressed with the following formula.

$$C'' = ftC(N)$$

$$Co'' = ft'Co(N)$$

Temperature °C	100 or less	125	150	175	200	225	250	350
ft	1.0	0.95	0.90	0.85	0.75	0.65	0.60	0.50
ft'	1.0	0.93	0.85	0.78	0.65	0.52	0.46	0.35

Normal usage range is -20~80°C. For application in high temperature, use of heat resistant grease as well as heat resistivity of other components should be evaluated.

### 9. Rigidity

In order to improve accuracies and system response of precision machinery and equipment, feed screw related component rigidity must be evaluated. Rigidity of feed screw system can be expressed with the following formula.

$$K = \frac{P}{\delta} \quad (N/\mu m)$$

Where:  
 P: Axial Loads Applied on Feed Screw System (daN)  
 δ: Elastic Deformation of Feed Screw System (μm)

Additionally, the following relationship exists between the feed screw system rigidity and other various construction element rigidity.

$$\frac{1}{K} = \frac{1}{K_s} + \frac{1}{K_n} + \frac{1}{K_b} + \frac{1}{K_h}$$

Where:  
 K<sub>s</sub>: Screw Shaft Compressive/Tensile Rigidity  
 K<sub>n</sub>: Nut Rigidity  
 K<sub>b</sub>: Support Bearing Rigidity  
 K<sub>h</sub>: Nut and Bearing Mount Rigidity

Screw Shaft Compressive/Tensile Rigidity : K<sub>s</sub>

$$K_s = \frac{P}{\delta_s} \quad (N/\mu m)$$

Where:  
 P: Axial Load (N)  
 δ<sub>s</sub>: Screw Shaft Expansion/Contraction (μm)

The expansion and contraction are expressed in the following formula. The expansion and contraction will directly appear as ball screw backlash.

#### (1) Fixed-Free Arrangement

$$\delta_s = \frac{4Pl}{E\pi d^2} \times 10^3 (\mu m)$$

Where:  
 P: Axial Load (N)  
 E: Young's Modulus (2.06x10<sup>5</sup>N/mm<sup>2</sup>)  
 d: Screw Shaft Root Diameter (mm)  
 l: Load Applicable Span Distance (mm)

#### (2) Fixed-Fixed Arrangement

$$\delta_s = \frac{4Pl\ell'}{E\pi d^2 L} \times 10^3 (\mu m)$$

Where:  
 P: Axial Load(N)  
 E: Young's Modulus (2.06x10<sup>5</sup>N/mm<sup>2</sup>)  
 d: Screw Shaft Root Diameter (mm)  
 ℓ, ℓ': Load Applicable Span Distance (mm)  
 L: Mounting Span Distance (mm)

The formula produces the max. value when ℓ = ℓ' =  $\frac{L}{2}$

$$\left( \delta_s = \frac{PL}{E\pi d^2} \times 10^3 \right)$$

Therefore, the max. shaft expansion and contraction will be 1/4 of Fixed-Free arrangement.



# Technical Data

## Selection of Ball Screws 4

### 10. Driving Torque

This selection provides a guide for selecting ball screw frictional properties and the driving motor.

#### 10-1. Friction and Efficiency

Ball screw efficiency can be expressed in the following formulas; wherein  $\mu$  is the coefficient of friction and  $\beta$  is the screw's lead angle. Variables are determined through analysis of a dynamic model.

When rotational force is converted into axial force (Forward Action)

$$\eta = \frac{1 - \mu \tan \beta}{1 + \mu / \tan \beta}$$

When axial force is converted into rotational force (Reverse Action)

$$\eta' = \frac{1 - \mu / \tan \beta}{1 + \mu \tan \beta}$$

#### 10-2. Load Torque

The load torque (constant speed driving torque) required in drive source design (motors, etc.) is calculated as follows.

##### (1) Forward Action

Torque required when converting rotational force into axial force

$$T = \frac{PL}{2\pi\eta} \quad (\text{N} \cdot \text{cm})$$

Where:

- T: Load Torque (N-cm)
- P: External Axial Load (N)
- L: Ball Screw Lead (cm)
- $\eta$ : Ball Screw Efficiency (0.9)

##### (2) Reverse Action

External axial load when converting axial force into rotational

$$P = \frac{2\pi T}{\eta' L} \quad (\text{N})$$

Where:

- P: External Axial Load (N)
- T: Load Torque (N-cm)
- L: Ball Screw Lead (cm)
- $\eta'$ : Ball Screw Efficiency (0.9)

##### (3) Friction Torque Caused by Preloading

This is a torque generated by preloading. As external loads increase, the preload of the nut is released and therefore the friction torque by preloading also decreases.

$$\text{Under No load} \quad T_p = K \frac{P_i L}{2\pi} \quad (\text{N} \cdot \text{cm})$$


Where:

- $P_i$ : Preload (N)
- L: Ball Screw Lead (cm)
- K: Coefficient of Internal Friction
- $\beta$ : Lead Angle
- $\beta = \tan^{-1} \left( \frac{L}{\pi D} \right)$
- D: Thread Outer Diameter

### 11. Selecting the Driving Motors

When selecting a driving motor, it is necessary to satisfy the following conditions:

1. Ensure a marginal force sufficient to counter the load torque exerted on the motor's output thread.
2. Enable starting, stopping at prescribed pulse speeds, sufficiently powered to counter the moment of inertia exerted on the motor's output thread.
3. Obtain the prescribed acceleration and deceleration constants, sufficient to counter the moment of inertia exerted on the motor's output thread.



#### (1) Constant Speed Torque Exerted on the Motor Output Thread

This is the amount of torque required to drive the output thread against the applied external load, at a constant speed.

$$T_1 = \left( \frac{PL}{2\pi\eta} + T_p \frac{(3P_L - P)}{3P_L} \right) \frac{Z_1}{Z_2} \quad (\text{N} \cdot \text{cm})$$

Where:  $P \leq 3P_L$

- $T_1$ : Driving Torque at Constant Speed (N-cm)
- P: External Axial Load (N)
- $P = F + \mu Mg$
- F: Thrust Reaction Produced in Cutting Force (N)
- M: Masses of Table and Work Piece (kg)
- $\mu$ : Coefficient of Friction on Sliding Surfaces
- g: Gravitational Acceleration (9.8m/s<sup>2</sup>)
- L: Ball Screw Lead (cm)
- $\eta$ : Mechanical Efficiency of Ball Screw or Gear
- $T_p$ : Friction Torque Caused by Preloading (N-cm) Referto Formula 10-2-(3)
- $P_L$ : Preload (N)
- $Z_1$ : Number of Pinion's Teeth
- $Z_2$ : No. of Gear's Teeth

#### (2) Acceleration Torque Exerted on the Motor Output Thread

This is the amount of torque required to drive the output shaft against the external load during acceleration.

$$T_2 = J_M \omega = J_M \frac{2\pi N}{60t} \times 10^{-3} \quad (\text{N} \cdot \text{cm})$$

$$J_M = J_1 + J_2 + \left( \frac{Z_1}{Z_2} \right)^2 (J_3 + J_4 + J_5 + J_6) \quad (\text{kg} \cdot \text{cm}^2)$$

Where:

- $T_2$ : Driving Torque in Acceleration (N-cm)
- $\omega$ : Motor Thread Angular Acceleration (rad/s<sup>2</sup>)
- N: Motor Thread Revolutions (min<sup>-1</sup>)
- t: Acceleration (s)
- $J_M$ : Moment of Inertia Exerted on the Motor (kg-cm<sup>2</sup>)
- $J_1$ : Moment of Inertia Exerted on Pinion (kg-cm<sup>2</sup>)
- $J_2$ : Moment of Inertia Exerted on Gear (kg-cm<sup>2</sup>)
- $J_3$ : Moment of Inertia Exerted on Ball Screw (kg-cm<sup>2</sup>)
- $J_4$ : Moment of Inertia Exerted on Motor's Rotor (kg-cm<sup>2</sup>)
- $J_5$ : Moment of Inertia of Moving Body (kg-cm<sup>2</sup>)
- $J_6$ : Moment of Inertia of Coupling (kg-cm<sup>2</sup>)
- M: Masses of Table and Work Piece (kg)
- L: Ball Screw Lead (cm)

Moment of inertia exerted on cylinders as screws and cylinders such as Gears

(Calculation of  $J_1 \sim J_4, J_6$ )

$$J = \frac{\pi \gamma}{32} D^4 \ell \quad (\text{kg} \cdot \text{cm}^2)$$

Where:

- D: Cylinder Outer Diameter (cm)
- $\ell$ : Cylinder Length (cm)
- $\gamma$ : Material Specific Gravity
- $\gamma = 7.8 \times 10^{-3} \quad (\text{kg/cm}^3)$
- $J_5 = M \left( \frac{L}{2\pi} \right)^2 \quad (\text{kg} \cdot \text{cm}^2)$

#### (3) Total Torque Exerted on the Motor Output Thread

Overall torque can be obtained by adding results from formulas (1) and (2).

$$T_M = T_1 + T_2 = \left( \frac{PL}{2\pi\eta} + T_p \frac{(3P_L - P)}{3P_L} \right) \frac{Z_1}{Z_2} + J_M \frac{2\pi N}{60t} \times 10^{-3} \quad (\text{N-cm})$$

Where:

- $T_M$ : Total Torque Exerted on the Motor Output Thread (N-cm)
- $T_1$ : Driving Torque at Constant Speed (N-cm)
- $T_2$ : Driving Torque at In Acceleration (N-cm)

Once you have temporarily found the type of motor you need, check

1. effective torque,
  2. acceleration constant and
  3. motor overload properties and heat tolerance during repeated starting, stopping.
- It is necessary to ensure a sufficient margin for these parameters.



12. Example of Selection of Ball Screws

**Condition of Use**

- Work & Table Mass      • Life Span      W=50(kg)      ±0.01(mm)
- Maximum Strokes      • Direct Acting Guide      Smax.=720(mm)      Lh=30000Hours
- Threading Speed      • Coefficient of Friction      Vmax.=1000(mm/s)      μ=0.02
- Acceleration Constant      • Driving Motor      t=0.15(s)      Nmax.=3000(min<sup>-1</sup>)
- Positioning Precision      • Duty Cycle Model Diagram      ±0.1/720(mm)
- Repeat Accuracy

1. Setting Lead (L)

Set lead based on maximum motor revolutions and threading speed. Use the following formula.

$$L \geq \frac{V_{max} \times 60}{N_{max}} = \frac{1000 \times 60}{3000} = 20$$

Required lead is 20mm or higher.

2. Nut selection

(1) Calculating Axial Load

**P 216**, 6-2. Axial Load calculation formula is used to obtain the axial loads for each segment of a motion profile.

- At Constant Speed: Axial Load (Pb) = μWg = 0.02 × 50 × 9.8 = 10 (N)
- In Acceleration: Acceleration (a) = (Vmax/t) × 10<sup>3</sup> = (100/0.15) × 10<sup>3</sup> = 6.67 (m/s<sup>2</sup>)  
Axial Load (Pa) = Wa + μWg = 50 × 6.67 + 0.02 × 50 × 9.8 = 343 (N)
- In Deceleration: Axial Load (Pc) = Wc - μWg = 50 × 6.67 - 0.02 × 50 × 9.8 = 324 (N)

(2) Actual moving time during each segment in a motion profile

Below derived from Duty Cycle Model Diagram.

Operating Pattern	In Acceleration	At Constant Speed	In Deceleration	Total Operating Time
Operating Time	0.60	0.84	0.60	2.04

(3) Summary of Axial Loads, Rotational Speeds, and Operation Time for Each Motion Profile

Operating Pattern	In Acceleration	At Constant Speed	g Pattern In Deceleration
Axial Load	343N	10N	324N
Revolutions Frequency	1500min <sup>-1</sup>	3000min <sup>-1</sup>	1500min <sup>-1</sup>
Operating Time Ratio	29.4%	41.2%	29.4%

(4) Calculating the Average Axial Load with a formula in **P 216**, 6-3.

$$\text{Mean Axial Load (Pm)} = \left( \frac{P_1^3 N_1 t_1 + P_2^3 N_2 t_2 + P_3^3 N_3 t_3}{N_1 t_1 + N_2 t_2 + N_3 t_3} \right)^{\frac{1}{3}} = 250 \text{ (N)}$$

(5) Calculating the mean turns

$$\text{Mean Turns (Nm)} = \frac{N_1 t_1 + N_2 t_2 + N_3 t_3}{t_1 + t_2 + t_3} = 2118 \text{ (min}^{-1}\text{)}$$

(6) Calculation of the required basic dynamic load rating

(1) Calculating Continuous Operational Life (Lh)

A Continuous Operational Life which is derived by subtracting Resting time from Desired Life while a motion profile of 4.01s with a moving time of 2.04s can be calculated as follows.

$$L_h = \text{Desired Life (Lh)} \times \left( \frac{2.04}{4.1} \right) = 14927 \text{ (Hours)}$$

(2) Calculating Required Basic Dynamic Load Rating

**P 216** 6-1. contains a formula for calculating a Basic Dynamic Load Rating for continuous operational life.

$$C = \left( \frac{60 L_h N_m}{10^6} \right)^{\frac{1}{3}} \times P_m \times f_w = \left( \frac{60 \times 14927 \times 2118}{10^6} \right)^{\frac{1}{3}} \times 250 \times 1.2 = 3700 \text{ (N)}$$

(7) Tentative Ball Screw Selection

A ball screw to satisfy the requirements of Lead 20 and Basic Dynamic Load Rating of 3700N, BSS1520 is tentatively selected.

3. Accuracy Evaluation

(1) Evaluating Accuracy Grades and Axial Clearances

**P 212** 2. "Ball Screw Lead Accuracy" section shows a table for accuracy values of various Accuracy Grades.

From the lead accuracy value table, it can be confirmed that the C5 Grade with Actual Mean Travel Error ±ep 0.040/800~1000mm will satisfy the requirement of ±0.1/720mm, and a BSS1520 is suitable.

Additionally, the Precision Screws axial clearance table on shows that axial clearance of BSS1520 is 0.005 or less.

The required positioning repeatability is ±0.01mm, and it can be confirmed that BSS1520 satisfies the requirement.

4. Screw Shaft Selection

(1) Determining the Overall Length

Screw Shaft O.A.L. (L)=

Max. Stroke+Nut Length+Margin+Shaft End Terminations (both sides). Therefore,

Max Stroke: 720mm

Nut Length: 62mm

Margin: Lead × 1.5 = 60mm

Shaft End Termination Dims.: 72

Screw Shaft O.A.L. (L) = 720 + 62 + 60 + 72 = 914mm

\*The Margin is provided as a countermeasure in case overruns, and the amount is typically set as 1.5~2 times the screw lead.

Lead 20 × 1.5 × 2 (Ends) = 60

(2) Evaluating the Allowable Axial Load

Load Applicable Span Distance l1 is 820mm, and the Axial Load can be obtained by the formula on **P 214**, "4. Allowable Axial Load" as below.

$$P = m \frac{d^4}{\ell^2} 10^4 = 10 \times \frac{12.5^4}{820^2} \times 10^4 = 3660 \text{ N}$$

The above formula produces an Axial Load value of 343N which is well within the Allowable Max. Axial Load 3660N, and suitability is confirmed.

(3) Evaluating the Allowable Max. Rotational Speed

Shaft supported span is 790mm, and the formula in "5-1. Critical Speed" on produces a value for the Critical Speed Nc as **P 215**

$$N_c = g \frac{d}{\ell^2} 10^7 = 15.1 \times \frac{12.5}{790^2} \times 10^7 = 3024 \text{ min}^{-1}$$

The max. speed requirement of 3000min<sup>-1</sup> is within the Critical Speed of 3024min<sup>-1</sup>, and the suitability is confirmed.

Additionally, the DmN value can be evaluated with the formula in **P 215**, "5-2. DmN Value" as...

DmN = (Shaft O.D. + A value) × Max Rotational Speed = 15.8 × 3000 = 47400 ≤ 70000 and the suitability is confirmed.

5. Selection Result

From the above, it is determined that a suitable ball screw model is BSS1520-914.



# Technical Data

## Calculation of Life Span of Linear Systems 1

### ■ Allowable Load

- Basic Dynamic Load Rating (C)  
Basic dynamic load rating is a constant load applied in a constant direction that enables each linear system of the same series to travel 50×103m under the same conditions, without 90% of the material suffering damage from rolling contact fatigue.
- Basic Static Load Rating (Co)  
Basic static load rating is the static load exerted on contacting parts under maximum stress, at which the sum of the permanent deformation in the rolling element and rolling contact surface equals 0.0001 times the diameter of the rolling element.
- Allowable Static Moment (Mp, Mv, Mn)  
Allowable static moment is a critical static moment load that acts upon a system at the loading moment. It is set in accordance with the permanent deformation as in basic static load rating Co.
- Static Safety Factor (fs)  
Static safety factors are given in Table 1. When a linear system is still or moving at low speed, basic static load rating Co must be divided by fs in accordance with the conditions of use.

Table 1. Static Safety Factor (Lower Limit of fs)

Condition of Use	Lower Limit of fs
Under Normal Operating Conditions	1~2
When Smooth Travel is Required	2~4
When Subjected to Vibrations, Impacts	3~5

$$\text{Allowable Load (N)} \leq C_o/f_s$$

$$\text{Allowable Moment (N-m)} \leq (M_p, M_v, M_n)/f_s$$

fs : Static Safety Factor

Co : Basic Static Load (N)

Mp, Mv, Mn : Static Allowable Moment (N-m)

### ■ Life Span

When a load is applied to a linear system, the system moves back and forth in a linear direction. In the process, repeated stress acts upon rolling elements and rolling contact surfaces, causing damage referred to as flaking from material fatigue.

The life span of a linear system is measured in terms of the total travel distance covered by the system up until initial flaking occurs.

- Rated Life Span (L)

Rated life span is the total travel distance that each linear system of the same series can endure under the same conditions, without the occurrence of flaking in 90% of the system.

Rated life span can be obtained as follows from the basic dynamic load rating and various loads exerted on the linear system.

$$\text{For Ball Bearings} \quad L = \left( \frac{C}{P} \right)^3 \cdot 50$$

$$\text{For Roller Bearings} \quad L = \left( \frac{C}{P} \right)^{10/3} \cdot 50$$

L : Rated Life Span (km)

C : Basic Dynamic Load Rating (N)

P : Acting Load (N)

- When actually using a linear system, the first thing you must do is to calculate the load. It is necessary to consider load also in terms of vibration and impact that occur during operation, as well as its distribution across the entire linear system as it moves back and forth in a linear direction. Calculations are not simple. Operating temperature also significantly influences useful life. When these parameters are taken into consideration, the above formula is transformed as follows:

$$\text{For Ball Bearings} \quad L = \left( \frac{f_H \cdot f_T \cdot f_C}{f_W} \cdot \frac{C}{P} \right)^3 \cdot 50$$

$$\text{For Roller Bearings} \quad L = \left( \frac{f_H \cdot f_T \cdot f_C}{f_W} \cdot \frac{C}{P} \right)^{10/3} \cdot 50$$

L : Rated Life Span (km)

fH : Hardness Coefficient (See Fig.1)

C : Basic Dynamic Load Rating (N)

fT : Temperature Coefficient (See Fig.2)

P : Acting Load (N)

fC : Contact Coefficient (See Table 3)

fW : Load Coefficient (See Table 4)

The Life span can be computed as a number of hours by obtaining the travel distance for a unit of time.

It can be obtained by using the following formula, in which stroke length and stroke cycles are assumed to be constant.

$$L_h = \frac{L \cdot 10^3}{2 \cdot \ell_s \cdot n_1 \cdot 60}$$

Lh : Life Span Hours (hr)

ℓs : Stroke Length (m)

L : Rated Life Span (km)

n1 : Reciprocating Times per Minute (cpm)

### ■ Friction Resistance and Required Thrust

Using the following formula, the friction resistance (required thrust) can be obtained from the load and the seal resistance specified by the system.

Table 2. Dynamic Friction Coefficient

Type	Dynamic Friction Coefficient (μ)
Miniature Slide Guides	0.004~0.006
Medium Load Slide Guides	0.002~0.003
Slide Ways	0.001~0.003
Slide Tables	0.001~0.003
Linear Bushings	0.002~0.003
Linear Ball Bushings	0.0006~0.0012

F : Friction Resistance (N)

μ : Dynamic Friction Coefficient

W : Weight Loaded

f : Seal Resistance (2N~5N)




• Hardness Coefficient ( $f_H$ )

In a linear system, the shaft must be hard enough to withstand contact with the ball bearings. Unless sufficient hardness is provided, the allowable load can decrease, resulting in a short useful life.

Compensate the rated life span with the hardness coefficient.

**Figure 1. Hardness Coefficient**

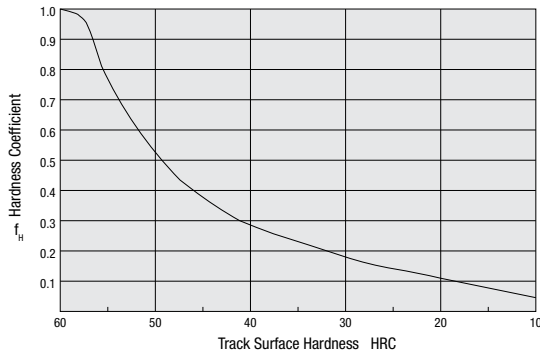

• Contact Coefficient ( $f_C$ )

In general, two or more linear systems are used with each shaft. Depending on the machining precision, the load exerted on each of the respective systems can vary. In this case, the load applied on each linear system changes depending on the machining precision, therefore it cannot be uniformly applied. As a result, allowable load per linear system changes depending on the number of linear systems on one axis.

Compensate the rated life span with the contact coefficient in Table 3.

• Load Coefficient ( $f_w$ )

When calculating the load that acts on a linear system, it is necessary to work with precise figures for material weight, the force of inertia resulting from operating speed, load moment, various changes that occur over time, and so on. However, it is difficult to have accurate calculation for oscillating movement as beside the normal repetition of start and stop, other factors such as vibration and impact also need to be considered.

Therefore, the life span calculation needs to be simplified using the load coefficient in Table 3.

■ Linear Bushings

Rated life span can be obtained as follows from the basic dynamic load rating and the load to the linear bushing.

$$L = \left( \frac{f_H \cdot f_T \cdot f_C}{f_w} \cdot \frac{C}{P} \right)^3 \cdot 50$$

- L : Rated Life Span (km)
- C : Basic Dynamic Load Rating (N)
- P : Working Load (N)
- $f_w$  : Load Coefficient (See Table 4.)
- $f_H$  : Hardness Coefficient (See Figure 1.)
- $f_T$  : Temperature Coefficient (See Figure 2.)
- $f_C$  : Contact Coefficient (See Table 3.)

The Life span can be computed as a number of hours by obtaining the travel distance for a unit of time. It can be obtained using the following formula, in which stroke length and stroke cycles are assumed to be constant.

$$L_h = \frac{L \cdot 10^3}{2 \cdot \ell_s \cdot n_1 \cdot 60}$$


- $L_h$  : Life Span Hours (hr)
- $\ell_s$  : Stroke Length (m)
- L : Rated Life Span (km)
- $n_1$  : Reciprocating Times per Minute (cpm)

• Temperature Coefficient ( $f_T$ )

When temperature in a linear system exceeds 100°C, the hardness of the system and the shaft become degraded. This decreases the allowable load to a greater extent than when the system is used at ambient temperature, and can shorten the life span.

Compensate the rated life span with the temperature coefficient.

**Figure 2. Temperature Coefficient**

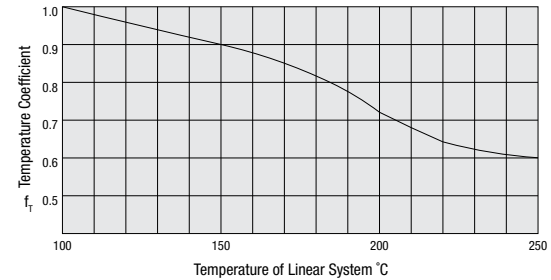

**Table 3. Contact Coefficient**

Number of Bearings per Shaft	Contact Coefficient $f_C$
1	1.00
2	0.81
3	0.72
4	0.66
5	0.61

**Table 4. Load Coefficients**

Condition of Use	$f_w$
Low speed with no external vibration or impact (Max. 15m/min)	1.0~1.5
Middle range speed with no exerted vibration or impact of considerable force (Max. 60m/min)	1.5~2.0
High speed with no external vibration or impact (Over 60m/min)	2.0~3.5

■ Linear Ball Bushings

Rated life span can be obtained as follows from the basic dynamic load rating and the load to the linear ball bushing.

$$L = \left( \frac{f_H \cdot f_T \cdot f_C}{f_w} \cdot \frac{C}{P} \right)^3 \cdot 50$$

- L : Rated Life Span (km)
- C : Basic Dynamic Load Rating (N)
- P : Working Load (N)
- $f_w$  : Load Coefficient (See Table 4)
- $f_H$  : Hardness Coefficient (See Fig.1)
- $f_T$  : Temperature Coefficient (See Fig.2)
- $f_C$  : Contact Coefficient (See Table 3)

Life Span Hours

• For revolution and reciprocating motion

$$L_h = \frac{10^6 \cdot L}{60 \sqrt{(dm \cdot n)^2 + (10 \cdot S \cdot n_1)^2} / dm}$$

• For reciprocating motion

$$L_h = \frac{10^6 \cdot L}{600 \cdot S \cdot n_1 / (\pi \cdot dm)}$$

- $L_h$  : Life Span Hours (hr)
- n : Revolutions per Minute (rpm)
- dm : Pitch Diameter of Ball (mm)  $\approx 1.15dr$
- S : Stroke Length (mm)
- $n_1$  : Strokes Per Minute (cpm)

• Revolution and reciprocal motion allowable values

$$DN \geq dm \cdot n + 10 \cdot S \cdot n_1$$



# Technical Data

## Calculation of Life Span of Linear Systems 2

### Load Calculations

Since a linear system bears the weight of the work while it performs a reciprocating linear motion, the load exerted on the system can vary depending on the work's center of gravity,


thrust acting position change, and the speed changes by starting, stopping and acceleration, deceleration.

It is necessary to take these conditions into consideration when selecting a linear system.

Table 5. Use Conditions and Load Calculation Formulas

Type	Condition of Use and Load	Type	Condition of Use and Load
1	<p>Horizontal Axis</p> $P_1 = \frac{1}{4} W + \frac{X_0}{2X} W + \frac{y_0}{2Y} W$ $P_2 = \frac{1}{4} W - \frac{X_0}{2X} W + \frac{y_0}{2Y} W$ $P_3 = \frac{1}{4} W + \frac{X_0}{2X} W - \frac{y_0}{2Y} W$ $P_4 = \frac{1}{4} W - \frac{X_0}{2X} W - \frac{y_0}{2Y} W$	3	<p>Perpendicular to Horizontal Axis</p> $P_1 = P_2 = P_3 = P_4 = \frac{\ell_1}{2X} W$ $P_{1S} = P_{3S} = \frac{1}{4} W + \frac{X_0}{2X} W$ $P_{2S} = P_{4S} = \frac{1}{4} W - \frac{X_0}{2X} W$
2	<p>Vertical Axis</p> $P_1 = P_2 = P_3 = P_4 = \frac{\ell_1}{2X} W$ $P_{1S} = P_{2S} = P_{3S} = P_{4S} = \frac{y_0 W}{2X}$	4	<p>In Acceleration, Deceleration</p> <p>Velocity (mm/sec) vs Time (sec) graph showing acceleration (t1), constant speed (t2), and deceleration (t3).</p> <ul style="list-style-type: none"> <li>Acceleration at Starting: <math display="block">P_1 = P_3 = \frac{1}{4} W \left( 1 + \frac{2V_i \cdot \ell_1}{g \cdot t_1 \cdot X} \right)</math> <math display="block">P_2 = P_4 = \frac{1}{4} W \left( 1 - \frac{2V_i \cdot \ell_1}{g \cdot t_1 \cdot X} \right)</math> </li> <li>Deceleration at Stopping: <math display="block">P_1 = P_3 = \frac{1}{4} W \left( 1 - \frac{2V_i \cdot \ell_1}{g \cdot t_3 \cdot X} \right)</math> <math display="block">P_2 = P_4 = \frac{1}{4} W \left( 1 + \frac{2V_i \cdot \ell_1}{g \cdot t_3 \cdot X} \right)</math> </li> <li>Constant Speed: <math display="block">P_1 = P_2 = P_3 = P_4 = \frac{1}{4} W</math> </li> </ul> <p>g: Gravitational Acceleration = 9.8 × 10<sup>3</sup> mm/sec<sup>2</sup></p>

W: Acting Load(N) P<sub>1</sub>,P<sub>2</sub>,P<sub>3</sub>,P<sub>4</sub>: Load applied to the Linear System(N) X,Y: Linear System Span(mm) V: Moving Speed(mm/sec) t<sub>1</sub>: Acceleration Time(sec) t<sub>3</sub>: Deceleration Time(sec)

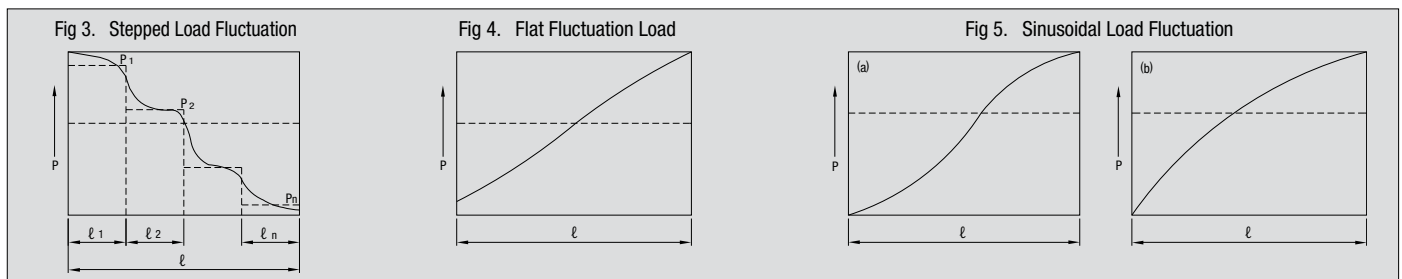



• **Mean Load Derived from Fluctuating Loads**

In general, the load acting upon a linear system can change according to how the system is used. This happens for example when the reciprocating motion is started, stopped as compared to constant speed motion, and whether or not work is present during transfer, etc. Therefore, in order to correctly design the life span under various conditions and fluctuating loads, it is necessary to obtain a mean load and apply it to the life span calculations.

(1) When load changes in steps by a travel distance (Fig 3.)

- Travel distance  $\ell_1$  subjected to load  $P_1$
- Travel distance  $\ell_2$  subjected to load  $P_2$
- ⋮
- Travel distance  $\ell_n$  subjected to load  $P_n$

Mean load  $P_m$  can be obtained by using the following formula:

$$P_m = \sqrt[3]{\frac{1}{\ell} (P_1^3 \ell_1 + P_2^3 \ell_2 + \dots + P_n^3 \ell_n)}$$

$P_m$  : Mean Load Derived from Fluctuating Loads (N)  
 $\ell$  : Total Travel Distance (m)

(2) When load changes almost linearly (Fig 4.)

Mean load  $P_m$  can be approximated by the following formula:

$$P_m \approx \frac{1}{3} (P_{min} + 2 \cdot P_{max})$$

$P_{min}$  : Min. Fluctuating Load (N)  
 $P_{max}$  : Max. Fluctuating Load (N)

(3) When the load change resembles a sinusoidal curve as shown in Fig 5.

(a), (b), Mean Load  $P_m$  can be approximated by the following formula:

Fig 5.(a)  $P_m \approx 0.65 P_{max}$   
Fig 5.(b)  $P_m \approx 0.75 P_{max}$

■ **Slide Guides**

Rated life span is the total travel distance each linear guide of the same series can endure under the same conditions, without the occurrence of flaking in 90% of the system. Rated life span can be obtained as follows from the basic dynamic load rating and the load to the slide guide.

$$L = \left( \frac{f_T}{f_w} \cdot \frac{C}{P} \right)^3 \cdot 50 \quad (1)$$

$L$  : Rated Life Span (km)                       $C$  : Basic dynamic load rating (N)  
 $f_T$  : Temperature Coefficient (See Fig 2.)     $P$  : Acting Load (N)  
 $f_w$  : Load Coefficient (See Fig 4.)

The life span hours can be computed as a number of hours by obtaining the travel distance for a unit of time. It can be obtained by using the following formula, in which stroke length and stroke cycles are assumed to be constant.

$$Lh = \frac{L \cdot 10^3}{2 \cdot \ell s \cdot n_1 \cdot 60} \quad (2)$$

$Lh$  : Life Span Hours (hr)                       $\ell s$  : Stroke Length (m)  
 $L$  : Rated Life Span (km)                       $n_1$  : Reciprocating Times per Minute (cpm)

■ **Slide Ways**

Rated load for slide ways is determined by the rolling elements (numbers of rollers). It can be calculated by using the following formulas:

<b>One shaft is used</b>	Load Direction
	Dynamic Load Rating (N) $C = \left( \frac{Z}{2} \right)^{3/4} \cdot C_1$  Static Load Rating (N) $C_0 = \left( \frac{Z}{2} \right) \cdot C_{01}$
<b>One shaft is used vertically</b>	Load Direction
	Dynamic Load Rating (N) $C = \left( \frac{Z}{2} \right)^{3/4} \cdot C_1 \cdot 2^{7/9}$  Static Load Rating (N) $C_0 = \left( \frac{Z}{2} \right) \cdot C_{01} \cdot 2$
<b>Two shafts are used in parallel</b>	Load Direction
	Dynamic Load Rating (N) $C = \left( \frac{Z}{2} \right)^{3/4} \cdot C_1 \cdot 2^{7/9}$  Static Load Rating (N) $C_0 = \left( \frac{Z}{2} \right) \cdot C_{01} \cdot 2$

$C_1$  : Basic Dynamic Load Rating per Roller (N)  
 $C_{01}$  : Basic Static Load Rating per Roller (N)  
 $Z$  : Number of Rolling Elements

The life span for slide ways is calculated by using the following formula.

$$L = \left( \frac{f_T \cdot C}{f_w \cdot P} \right)^{10/3} \cdot 50$$

$L$  : Life Span Hours (km)                       $C$  : Dynamic Load Rating (N)  
 $f_T$  : Temperature Coefficient (See Fig 2.)     $P$  : Acting Load (N)  
 $f_w$  : Load Coefficient (See Fig 4.)

Life Span Hours

$$L_h = \frac{L \cdot 10^3}{2 \cdot \ell s \cdot n_1 \cdot 60}$$

$L_h$  : Life Span Hours (hr)                       $\ell s$  : Stroke Length (m)  
 $L$  : Life Span Hours (km)                       $n_1$  : Reciprocating Times per Minute (cpm)



# Technical Data

## Selection of Single Axis Actuators 1

Select the nominal LX actuator from the travel and the rating list below.



Determine the ball screw lead so that the operation speed will be within the maximum speed shown in (Table 4). At this stage, the selection is temporary.



Examine the load applied to the rail and put it in formulas (1) and (2) on page 225. Obtain the equivalent load  $F_e$  for each process and put it in formula (3) on page 225. Obtain the average load  $F_m$  and calculate the lifetime.



Examine the load applied to the ball screw and the support bearing. Put it in formula (3) on page 225, obtain the average load  $F_m$  and calculate the lifetime.

### Rated load (Table 1)

Item		LX2001	LX2005	LX2602	LX2605	LX3005	LX3010	LX4510	LX4520	
Rail	Dynamic load rating $C_a$ (N)	3277		6522		9732	6305	18450	11826	
	Static load rating $C_oa$ (N)	6199		11871		17218	9271	32441	17175	
	Radial clearances	-3~0		-4~0		-4~0		-6~0		
Ball screw	Dynamic load rating $C_a$ (N)	Advanced	482	822	1712	1600	1831	1129	4167	2499
	Static load rating $C_oa$ (N)	Advanced	642	1026	2251	2097	2389	1386	5945	3381
	Thread shaft diameter (mm)		6	6	8	8	10	10	15	15
	Lead (mm)		1	5	2	5	5	10	10	20
	Core diameter		5.3	4.918	6.4	6.46	8.2		11.7	
	Ball center diameter		6.15	6.3	8.3	8.3	10.3	10.3	15.5	15.75
Bearing (fixed side)	Axial load	Dynamic load rating $C_a$ (N)	730		1637		2702		4335	
		Static load rating $C_oa$ (N)	461		1205		2197		4106	

### Moment equivalent coefficient at rail (Table 2)

Type	Block	$K_p$	$K_y$	$K_r$
LX20__	1 piece	0.228	0.228	0.0667
	Close contact between 2 pcs.	0.144	0.144	0.0667
LX26__	1 piece	0.17	0.17	0.0527
	Close contact between 2 pcs.	0.114	0.114	0.0527
LX30__	1 piece	0.137	0.137	0.0445
	Close contact between 2 pcs.	0.0917	0.0917	0.0445
LX45__	1 piece	0.1115	0.1115	0.0334
	Close contact between 2 pcs.	0.0840	0.0840	0.0334

### Rail geometrical moment of inertia (Table 3)

Type	$L_x$ (mm <sup>4</sup> )	$L_y$ (mm <sup>4</sup> )	Mass (kg/100mm)	Center of Gravity h (mm)
LX2001	$3.2 \times 10^3$	$5.2 \times 10^4$	0.22	4.4
LX2606	$1.0 \times 10^4$	$1.4 \times 10^5$	0.37	6.1
LX30__	$2.5 \times 10^4$	$3.1 \times 10^5$	0.6	7.8
LX45__	$8.8 \times 10^4$	$10.4 \times 10^5$	1.10	11.0

### Allowable Static Load / Allowable Static Moment (Table 4)


Type	No. of blocks	Allowable Static Load (kg)	Allowable Static Moment (N-m)		
			Horizontal	$M_a$	$M_b$
LX20__	B1	6199	27	27	93
	B2	12398	353	353	186
LX20__C	B1	6199	27	27	93
	B2	12398	353	353	186
LX26__	B1	11871	70	70	225
	B2	23742	902	902	450
LX26__C	B1	11871	70	70	225
	B2	23742	902	902	450
LX3005	B1	17218	126	126	387
	B2	34436	1515	1515	774
LX3005C	B1	17218	126	126	387
	B2	34436	1515	1515	774
LX3010	B1	17218	126	126	387
	B2	34436	1515	1515	774
LX3010C	B1	17218	126	126	387
	B2	34436	1515	1515	774
LX4510	B1	32441	291	291	972
	B2	64882	3945	3945	1944
LX4520	B1	32441	291	291	972
	B2	64882	3945	3945	1944

### Maximum travel speed (Table 6)

Type	Lead	L (mm)	Maximum Travel Speed (mm/s)
LX20__	01	-	190
	05	-	690
LX26__	02	-	290
	05	-	520
LX30__	06	150	410
		200	410
		300	410
		400	410
		500	370
		600	250
LX30__	10	150	830
		200	830
		300	830
		400	830
		500	740
		600	500
LX45__	10	340	550
		390	550
		440	550
		490	550
		540	550
		590	550
	20	340	1110
		390	1110
		440	1110
		490	1110
		540	1110
		590	1110

### Load coefficient $f_w$ (Table 7)

Vibration/Impact	Speed	$f_w$
Subtle	Super-low speed $V \leq 0.25m/s$	1~1.2
Small	Low speed $0.25m/s < V \leq 1m/s$	1.2~1.5
Medium	Medium speed $1m/s < V \leq 2m/s$	1.5~2
Large	High speed $2m/s < V$	2~3.5



### Allowable Static Load / Allowable Static Moment (Short Block) (Table 5)

Type	No. of locks	Allowable Static Load (kg)	Allowable Static Moment (N-m)		
			Horizontal	$M_a$	$M_b$
LX3005	S1	9271	63	63	208
	S2	18542	579	579	417
LX3010	S1	9271	63	63	208
	S2	18542	579	579	417
LX4510	S1	17175	145	145	515
	S2	34350	1444	1444	1029
LX4520	S1	17175	145	145	515
	S2	34350	1444	1444	1029







Selection is easy with Single Actuator calculation tool available at:  
[http://fawos.misumi.jp/FA\\_WEB/unit/web/misumi\\_LX\\_en.html](http://fawos.misumi.jp/FA_WEB/unit/web/misumi_LX_en.html)

Life Span

For the LX actuator, calculate the life span of the rail, ball screw and support bearing. The actuator life span is determined to be the smallest value from among these results.

- Load Mass : W kg
- Stroke : Ls mm
- Acceleration : a mm/s<sup>2</sup>
- Maximum Speed : v mm/s
- Gravity : g=9.81m/s<sup>2</sup>
- Acceleration : Horizontal
- Speed Diagram : (Fig 1.)
- Operating Conditions : (Fig 2.)

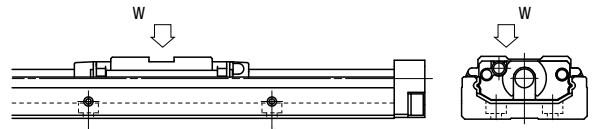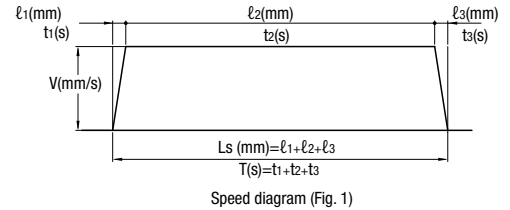

Status of load applied (Fig. 2)

Examination Selection

Select the temporary model number based on the load mass W (kg) and the maximum speed V (mm/s). Then prepare a speed diagram based on the acceleration, maximum speed and travel. The conditions that can develop this speed diagram will serve as the basis for the selection calculation.

Calculation Lifetime Calculation Example

Examine the status of the load applied (Fig. 2) to the rail of the LX actuator. Put each load in the formula below (formula (1) for single nut block specifications and formula (2) for double nut block specifications), and obtain the equivalent load Fe.

Equivalent Load

• In the case of single block

$$Fe = Y_H F_H + Y_V F_V + Y_P K_P M_a + Y_Y K_Y M_b + Y_R K_R M_c \quad (1)$$

• In the case of double block

$$Fe = Y_H F_H / 2 + Y_V F_V / 2 + Y_P K_P M_a + Y_Y K_Y M_b + Y_R K_R M_c \quad (2)$$

- F<sub>e</sub> : Equivalent Load
- F<sub>H</sub> : Horizontal load acting on blocks
- F<sub>V</sub> : Vertical load applied to the block
- M<sub>a</sub> : Pitching direction moment applied to the block
- M<sub>b</sub> : Yawing direction moment applied to the block
- M<sub>c</sub> : Rolling direction moment applied to the block
- K<sub>p</sub> : Equivalent coefficient for pitching direction moment
- K<sub>y</sub> : Equivalent coefficient for yawing direction moment
- K<sub>r</sub> : Equivalent coefficient for rolling direction moment
- Y<sub>H</sub>, Y<sub>V</sub>, Y<sub>P</sub>, Y<sub>Y</sub>, Y<sub>R</sub>: 1.0 or 0.5

When the actuator is used under moment loads, calculate the load by multiplying the guide moment equivalent coefficient in Table 2. In formulas (1) and (2), in order to obtain the equivalent load Fe, the maximum value among FH, Fv, KpMa, KyMb and KrMc is determined to be 1.0, and the remaining items are set at 0.5.

Average Load

As Ma and Mb for the LX actuator vary with acceleration and deceleration, obtain the average load Fm from formula (3).

$$Fm = \sqrt[3]{\frac{1}{L_s} (F_e^3 \cdot L_1 + F_e^3 \cdot L_2 + F_e^3 \cdot L_3 \cdot Ln)} \quad (3)$$

- Fm: Average load for fluctuating loads (N)
- L: Total travel distance (km)

Rail Life Span

Obtain the rail life span for the LX actuator from formula (4).

$$L = L_a \times \left( \frac{C}{f_w \cdot F_m} \right)^3 \quad (4)$$

- L: Rail lifetime (km)
- L<sub>a</sub>: Travel distance (km)
- f<sub>w</sub>: Load coefficient
- C: Basic dynamic load rating (N)

When the travel length and the number of reciprocal motions per minute are constant, the number of life span hours can be calculated from formula (5).

$$Lh = \frac{L \times 10^6}{2 \cdot \ell_s \cdot n1 \times 60} \quad (5)$$

- Lh: Life span hours (h)
- ℓ<sub>s</sub>: Travel (mm)
- n1: Reciprocal motions per minute

Life span of ball screw and support areas

Obtain the average load from the load applied in the axial direction. Calculate life span for both ball screws and bearings from formula (6). Obtain the average load from formula (3).

$$Lr = \left( \frac{Ca}{f_w \cdot F_m} \right)^3 \cdot \ell \times 10^6 \quad (6)$$

- Lr: Life span of ball screw (km)
- ℓ: Ball screw lead (mm)
- f<sub>w</sub>: Load coefficient
- Ca: Basic dynamic load rating of screw and support (N)




# Technical Data

## Selection of Single Axis Actuators 2


### Rated lifetime calculation example

#### 1 Model number for examination

Operating conditions : LX26  
 Rail : C (Basic dynamic load rating)=6522N Co (Basic static load rating)=11871N  
 Ball screw : Ca (Basic dynamic load rating)=1712N Coa (Basic static load rating)=2251N  
 Support bearings : Ca (Basic dynamic load rating)=1637N Poa (Basic static load rating)=1205N  
 Load mass : 10kg  
 Maximum speed : 250mm/s  
 Acceleration : 833mm/s<sup>2</sup>  
 Stroke : 200mm  
 Gravity : g=9.81m/s<sup>2</sup>  
 Position : Horizontal  
 Speed diagram : (Fig. 1)  
 Operating Conditions : (Fig. 2)

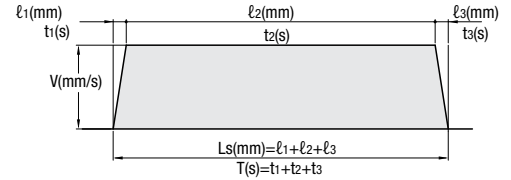

Speed diagram (Fig. 1)

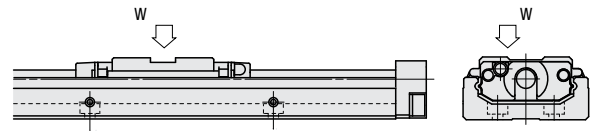

Status of load applied (Fig. 2)

#### 2 Examination

##### Temporary selection

Use a travel distance of 200 mm with an acceleration of 833 mm/s<sup>2</sup> and a maximum speed of 250 mm/s. Based on these conditions, assume that the LX26 series is used. (The selection software can be used on the Misumi website after customer registration has been completed.)

#### 3 Calculation

##### 3-1 Examination of rail

Multiply the moment equivalent coefficient in the table with the load according to the condition in which one nut block is used.

##### Load for Nut Block

1) At constant speed

$$Fe_1 = Yv \quad Fv = Yv \cdot W \cdot g = 1 \cdot 10 \cdot 9.81 = 98.1(N)$$

2) At acceleration

$$Fe_2 = YvFv + Yp \quad Kp \quad Ma = 0.5 \cdot 98.1 + 1 \cdot 0.17 \cdot 70 \cdot 0 = 60.95(N)$$

3) At deceleration

$$Fe_3 = Yv \quad Fv + Yp \quad Kp \quad Ma = 0.5 \cdot 98.1 + 1 \cdot 0.17 \cdot 70 \cdot 0 = 60.95(N)$$

Static safety coefficient

$$f_s = \frac{Co}{F_{max}} = \frac{Co}{W \cdot g} = \frac{11871}{98.1} = 121.1$$

##### Rated Life Span

Axial average load

$$F_m = \sqrt[3]{\frac{1}{L_s} (Fe_1^3 \cdot L_1 + Fe_2^3 \cdot L_2 + Fe_3^3 \cdot L_3 \cdot Ln)} = 87.72(N)$$

Rated life span

$$L = \left( \frac{C}{f_w \cdot F_m} \right)^3 \times 50 = 11.89 \times 10^6$$

f<sub>w</sub> : Load coefficient 1.2  
 L<sub>a</sub> : Travel distance

##### 3-2 Examination of ball screw

Obtain the axial loads for the parts and the average load from the speed diagram.

##### Lifetime of Ball Screw

Axial load

1) At constant speed

$$Fe_1 = \mu \cdot W \cdot g = 0.01 \times 10 \times 9.81 = 0.981(N)$$

2) At acceleration

$$Fe_2 = Fe_1 + W \cdot a \times 10^{-3} = 0.981 + 10 \cdot 0.833 = 9.311(N)$$

3) At deceleration

$$Fe_3 = Fe_1 - W \cdot a \times 10^{-3} = 7.352(N)$$

Static safety coefficient

$$f_s = \frac{Co_a}{F_{max}} = \frac{Co_a}{Fe_2} = \frac{2251}{9.311} = 241.76$$



Selection is easy with Single Actuator calculation tool available at:  
[http://fawos.misumi.jp/FA\\_WEB/unit/web/misumi\\_LX\\_en.html](http://fawos.misumi.jp/FA_WEB/unit/web/misumi_LX_en.html)

**Buckling Load**

$$P_1 = \frac{n \cdot \pi^2 \cdot E \cdot I}{\ell a^2} \times 0.5 = 5562.02(\text{N})$$

- P<sub>1</sub> : Buckling load
- ℓa : Distance between mounting points 250(mm)
- E : Young's modules 2.06×10<sup>5</sup>(N/mm<sup>2</sup>)
- n : Coefficient according to mounting method
- 0.5: Safety factor
- I : Minimum geometrical moment of inertia of screw shaft

$$I = \frac{\pi \cdot d_1^4}{64} = 85.49(\text{mm}^4)$$

- d<sub>1</sub> : Root diameter of screw shaft 6.46(mm)

**Allowable tension/compression load**

$$P_2 = \frac{\delta \cdot \pi \cdot d_1^2}{4} = 4818.06$$

- P<sub>2</sub> : Allowable tension/compression load (N)
- δ : Allowable tension/compression stress 147(N/mm<sup>2</sup>)
- d<sub>1</sub> : Root diameter of screw shaft 6.46(mm)

**Critical Speed**

$$N1 = \frac{60 \cdot \lambda^2}{2\pi \cdot \ell b^2} \cdot \sqrt{\frac{E \times 10^3 \cdot I}{\gamma \cdot A}} \times 0.8 = 12485(\text{min}^{-1})$$

- N1 : Critical speed
- ℓb : Distance between mounting points
- E : Young's modules 2.06×10<sup>5</sup>(N/mm<sup>2</sup>)
- λ : Coefficient according to mounting method (Fixed-Support 3.927)
- γ : Density (7.85×10<sup>-6</sup>kg/mm<sup>3</sup>)
- 0.8: Safety factor

**DN value**

$$DN = 62250 (\leq 70000)$$

- D : Ball center to center diameter (8.3mm)
- N : Maximum number of operating revolutions (min<sup>-1</sup>)

**Rated Life Span**

Axial average load

$$F_m = \sqrt[3]{\frac{1}{L_s} (Fe_1^3 \cdot L_1 + Fe_2^3 \cdot L_2 + Fe_3^3 \cdot L_3 \cdot Fen^3 \cdot Ln)} = 6.096(\text{N})$$

Rated life span

$$L = \left( \frac{Ca}{fw \cdot F_m} \right)^3 \cdot \ell \times 10^6 = 25.64 \times 10^6(\text{km})$$

- fw : Load coefficient 1.2
- ℓ : Ball screw lead 2 (mm)

**3-3 Examination of support bearing**

Axial load

$$\begin{aligned} Fe_1 &= 0.981(\text{N}) \\ Fe_2 &= 9.311(\text{N}) \\ Fe_3 &= 7.352(\text{N}) \end{aligned}$$

Static safety coefficient

$$f_s = \frac{P_{oa}}{F_{max}} = \frac{P_{oa}}{Fe_2} = 129.42$$

**Equivalent Load**

Axial average load

$$F_m = \sqrt[3]{\frac{1}{L_s} (Fe_1^3 \cdot L_1 + Fe_2^3 \cdot L_2 + Fe_3^3 \cdot L_3 \cdot Fen^3 \cdot Ln)} = 6.096(\text{N})$$

Rated lifetime

$$L = \left( \frac{Ca}{fw \cdot F_m} \right)^3 \cdot \ell \times 10^6 = 22.41 \times 10^6(\text{km})$$

- fw : Load coefficient 1.2
- ℓ : Ball screw lead 2 (mm)

LX2602	Rail	Ball Screw	Support Bearing
Static safety factor	121.1	241.76	129.42
Buckling load (N)	—	5562.02	—
Allowable tension/compression load (N)	—	4818.06	—
Critical speed (min <sup>-1</sup> )	—	12485	—
DN value	—	62250	—
Rated lifetime (km)	11.89×10 <sup>6</sup>	22.31×10 <sup>6</sup>	19.505×10 <sup>6</sup>
Maximum axial load (N)	—	9.311	—
Maximum number of operating revolutions	—	7500	—



# Technical Data

Excerpts from JIS B 1514

## Radial Bearing (Class 0) Tolerances and Allowances

About IP Codes for Sensor Switches

### Radial Bearing (Class 0) Tolerances and Allowances. (JIS Class 0 is equivalent to ABEC-1)

#### (1) Inner Wheel

Unit :  $\mu\text{m}$

Nominal Inner Diameter of Bearing		$\Delta_{dmp}$		Diameter Series			$V_{dmp}$	$K_{ia}$	Single Bearing		Bearings in Combinations		$V_{Bs}$
				9	0,1	2,3,4			$\Delta_{Bs}$				
More	or Less	Above	Below	Max.			Max.	Max.	Above	Below	Above	Below	Max.
0.6(1)	2.5	0	-8	10	8	6	6	10	0	-40	—	—	12
2.5	10	0	-8	10	8	6	6	10	0	-120	0	-250	15
10	18	0	-8	10	8	6	6	10	0	-120	0	-250	20
18	30	0	-10	13	10	8	8	13	0	-120	0	-250	20
30	50	0	-12	15	12	9	9	15	0	-120	0	-250	20
50	80	0	-15	19	19	11	11	20	0	-150	0	-380	25
80	120	0	-20	25	25	15	15	25	0	-200	0	-380	25
120	180	0	-25	31	31	19	19	30	0	-250	0	-500	30
180	250	0	-30	38	38	23	23	40	0	-300	0	-500	30
250	315	0	-35	44	44	26	26	50	0	-350	0	-500	35
315	400	0	-40	50	50	30	30	60	0	-400	0	-630	40
400	500	0	-45	56	56	34	34	65	0	-450	—	—	50
500	630	0	-50	63	63	38	38	70	0	-500	—	—	60
630	800	0	-75	—	—	—	—	80	0	-750	—	—	70
800	1000	0	-100	—	—	—	—	90	0	-1000	—	—	80
1000	1250	0	-125	—	—	—	—	100	0	-1250	—	—	100
1250	1600	0	-160	—	—	—	—	120	0	-1600	—	—	120
1600	2000	0	-200	—	—	—	—	140	0	-2000	—	—	140

(1) 0.6mm is included in this class. (2) Applies to each orbit ring made for bearing combination.

#### (2) Outer Ring

Nominal Outer Diameter of Bearing		$\Delta_{Dmp}$		Open Bearing		Sealed Bearing, Shielded Bearing		(4) $V_{Dmp}$	$K_{ea}$	$\Delta_{Cs}$		$V_{Cs}$
				9	0,1	2,3,4	2,3,4			Above	Below	
More	or Less	Above	Below	Max.				Max.	Max.	Above	Below	Max.
2.5(3)	6	0	-8	10	8	6	10	6	15	—	—	—
6	18	0	-8	10	8	6	10	6	15	—	—	—
18	30	0	-9	12	9	7	12	7	15	—	—	—
30	50	0	-11	14	11	8	16	8	20	—	—	—
50	80	0	-13	16	13	10	20	10	25	—	—	—
80	120	0	-15	19	19	11	26	11	35	—	—	—
120	150	0	-18	23	23	14	30	14	40	—	—	—
150	180	0	-25	31	31	19	38	19	45	—	—	—
180	250	0	-30	38	38	23	—	23	50	—	—	—
250	315	0	-35	44	44	26	—	26	60	—	—	—
315	400	0	-40	50	50	30	—	30	70	—	—	—
400	500	0	-45	56	56	34	—	34	80	—	—	—
500	630	0	-50	63	63	38	—	38	100	—	—	—
630	800	0	-75	94	94	55	—	55	120	—	—	—
800	1000	0	-100	125	125	75	—	75	140	—	—	—
1000	1250	0	-125	—	—	—	—	—	160	—	—	—
1250	1600	0	-160	—	—	—	—	—	190	—	—	—
1600	2000	0	-200	—	—	—	—	—	220	—	—	—
2000	2500	0	-250	—	—	—	—	—	250	—	—	—

(3) 2.5mm is included in this class. (4) Applies when a retaining ring is not installed.

#### Dimensional Tolerance

$\Delta_{dmp}$  : Tolerance of Mean Inner Diameter within the Plane  
 $\Delta_{Dmp}$  : Tolerance of Mean Outer Diameter within the Plane  
 $\Delta_{Bs}$  : Measured Inner Ring Tolerance or Height Tolerance of Center Orbiting Plate  
 $\Delta_{Cs}$  : Measured Outer Ring Tolerance

#### Dimensional Inequality

$V_{dq}$  : Inner Diameter Inequality within the Plane  
 $V_{dmp}$  : Mean Inner Diameter Inequality within the Plane  
 $V_{Dp}$  : Outer Diameter Inequality within the Plane


$V_{Dmp}$  : Mean Outer Diameter Inequality within the Plane  
 $V_{Bs}$  : Inequality of Inner Ring Widths  
 $V_{Cs}$  : Inequality of Outer Ring Widths

#### Rotation Precision

$K_{ia}$  : Radial Deviation of Inner Rings  
 $K_{ea}$  : Radial Deviation of Outer Rings

### About IP Codes for Sensor Switches

- IP codes in this catalog are based on "Protection Statement for Equipments" of IEC 529:1989.
- Sealing ability may be affected by the conditions or environment in which it is used, such as cutting oil, chemicals, or existence of dust.

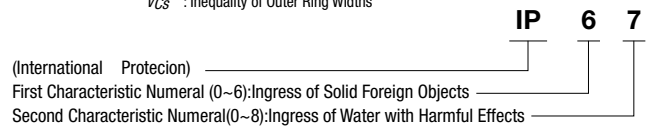

Characteristic Numeral	Ingress of Solid Foreign Objects	Ingress of Water with Harmful Effects
0	Non-Protected	Non-Protected
1	Protected against solid foreign objects 50mm in diameter or greater.	Protected against vertically falling water drops.
2	Protected against solid foreign objects 12.5mm in diameter or greater.	Protected against vertically falling water drops angled within 15 degree.
3	Protected against solid foreign objects 2.5mm in diameter or greater.	Protected against spraying water.
4	Protected against solid foreign objects 1.0mm in diameter or greater.	Protected against splashing water.
5	Dust-protected: Prevents the penetration of dust in amounts interfering with equipment operation.	Protected against water jetting from any direction.
6	Dust-tight: No ingress of dust.	Protected against powerful water jetting from any direction.
7	—	Protected against ingress of water in quantities causing harmful effects when the enclosure is temporarily immersed.
8	—	Protected against ingress of water in quantities causing harmful effects when the enclosure is continuously immersed in water under conditions more severe than No. 7, as determined by the parties concerned.



# Technical Data

## How to Use Coil Springs and Precautions

### ■ How to Use Coil Springs and Precautions

MISUMI is engaged in a constant effort to design coil springs (excluding Round Wire Springs) with optimum cross-sectional shape and maximum durability. When using the springs, pay due attention to the following precautions and undesirable usage that should be avoided for the sake of safety.

#### (1) Always Use A Spring Guide

When used without a spring guide, the coil spring may buckle or bend midway. This can cause it to break since the internal surface of the bending is subjected to concentrated high stress. Be sure to use a spring guide, such as a shaft and an outer diameter guide, with the coil spring.

\*In most cases, the best results are obtained by inserting a shaft all the way through the coil spring, from top to bottom, as an inner diameter guide.

#### (2) Clearance between the Spring Inner Diameter and Shaft

When clearance between the spring and the shaft is insufficient, the coil spring's internal surface may come into contact with the shaft and be subject to abrasion at that point. This can lead to the spring eventually breaking at the point of wear. Excessive clearance with shaft, on the other hand, can lead to buckling of the coil spring. It is recommended that the shaft diameter be set approximately 1.0 mm smaller than the inner diameter of the coil spring.

When the coil spring has a long free length (i.e., free length/OD is 4 or larger), set up a step on the shaft as shown in Fig.-1 to prevent the coil spring's internal surface from touching the shaft when it bends.

#### (3) Clearance between The Spring OD and Counterbore Hole

The coil spring expands in the outward direction when it deflects. Insufficient clearance between the spring and the counterbore hole restrains expansion, and the resulting concentration of stress can cause the coil spring to break. It is recommended that the counterbore diameter be set approximately 1.5mm larger than the outer diameter of the coil spring. The counterbore configuration shown in Fig.-1 is ideal for a coil spring with a long free length.

#### (4) Avoid A Short Shaft Length and Shallow Counterbore Hole Depth

If the guide is too short, the coil spring may touch the guides tip when it is buckled. The resulting friction can cause the coil spring to break. It is recommended that the guide length be set longer than half of the initial height. Also make sure to chamfer the shaft to around C3 level.

#### (5) Do Not Use in Excess of The Maximum Deflection (300,000 times limit) or Near Its Solid Length

When the coil spring is used in excess of the 300,000 times limit, its Cross-section starts receiving stress that is higher than the theoretical value. This can cause the coil spring to break. Furthermore, when the coil spring is used at around its solid length, its active coils gradually adhere to each other, increasing the spring constant value and causing the load curve to rise, as shown in Fig.-2. Do not use the coil spring in excess of the 300,000 times limit.

#### (6) Set up An Initial Deflection

When there is a gap for the coil spring to move vertically, it receives an impact force that causes it to bend midway or to buckle.

Setting up an initial deflection stabilizes the top and bottom ends of the spring.

#### (7) Avoid Entrapment of Debris or Foreign Matter

Debris or foreign matter that becomes caught between the coils cause that part of the coil spring to stop functioning as active coils, forcing the other coils to deflect, as shown in Fig.-3. This effectively reduces the number of active coils, increasing the stress on the spring, and eventually causing it to break. Be careful not to allow debris or foreign matter to clog the coils.

#### (8) Keep Mounting Faces Parallel

The coil spring should be mounted properly, with its mounting faces top and bottom faces parallel to each other. Misalignment can cause the spring to bend midway, subjecting the bend to high stress. This can cause the spring to break at the point. The same applies to the dies in which the coil spring is used, if the parallel alignment between the dies is poor, as shown in Fig.-4, the coil spring can bend midway or exceed the 300,000 times limit prematurely. Keep the coil spring mounting faces as perfectly parallel as possible to prevent this from occurring.

#### (9) Do Not Use Coil Springs in Series

If you use two coil springs in series, they will tend to bend, as shown in Fig.-5. This can cause them to move out of the shaft, counterbore holes. If this happens, this coil spring will eventually break for the same reasons described in (1) above. Moreover, due to spring load differences, the weaker spring is overcome by, and deflects more than, the stronger spring, as shown in Fig.-6. This will make the weaker spring more prone to damage, or cause it to break.

#### (10) Do Not Use Two Coil Springs in Parallel

Use of two coil springs in parallel, as shown in Fig.-7, may result in the inner coils being sandwiched between the outer coils, or vice versa, when they contract. This can cause the coil springs to break for the same reason noted in (4).

#### (11) Do Not Use the Coil Spring Horizontally

When the coil spring is used horizontally, the internal surface of the spring will come into contact with the shaft, causing abrasion at those spots. The spring will eventually break at these weakened spots.

### MISUMI Endurance Test Conditions

#### (1) Spring Guide Formula

Shaft Penetration  
Shaft Dia.: -1.0mm less than d dimension

#### (2) Initial Deflection

1.0mm

#### (3) Amplitude

Deflection with 300,000 time limit value

#### (4) Velocity

180spm

\*The maximum number of allowable operating times may vary depending on the service conditions.

Fig-1




Fig-2




Fig-3




Fig-4




Fig-5




Fig-6





Fig-7





# Technical Data

## Spring Calculations

Excerpts from JIS B 2704(2000)

### 1. Calculation



#### 1.1 Symbols Used in Spring Design Formulae

Symbols used in spring design formulae are shown in Table 1.

Table 1. Meaning of Symbols

Symbol	Meaning of Symbols	Unit
d	Diameter of Material	mm
D <sub>1</sub>	Inner Diameter of a Coil	mm
D <sub>2</sub>	Outer Diameter of a Coil	mm
D	Coil Mean Diameter = $\frac{D_1 + D_2}{2}$	mm
N <sub>t</sub>	Total Number of Winding	-
N <sub>a</sub>	Number of Active Winding	-
L	Free Length (Length)	mm
H <sub>s</sub>	Solid Length	mm
p	Pitch	mm
P <sub>i</sub>	Initial Tension	N(kgf)
c	Spring Index $c = \frac{D}{d}$	-
G	Shear Modulus of Elasticity	N/mm <sup>2</sup> {kgf/mm <sup>2</sup> }
P	Load on Spring	N(kgf)
δ	Spring Deflection	mm
k	Spring Constant	N/mm{kgf/mm}
τ <sub>0</sub>	Torsional Stress	N/mm <sup>2</sup> {kgf/mm <sup>2</sup> }
τ	Corrected Torsional Stress	N/mm <sup>2</sup> {kgf/mm <sup>2</sup> }
τ <sub>i</sub>	Initial Stress	N/mm <sup>2</sup> {kgf/mm <sup>2</sup> }
χ	Stress Correction Factor	-
f	Frequency	Hz
U	Spring-Retained Energy	N·mm{kgf·mm}
ω	Per Unit Volume Material Weight	kg/mm <sup>3</sup>
W	Mass of Moving Parts	kg
g	Gravitational Acceleration (1)	mm/s <sup>2</sup>

Note (1) In spring calculations, a gravitational acceleration of 9806.65mm/s<sup>2</sup>, is used.

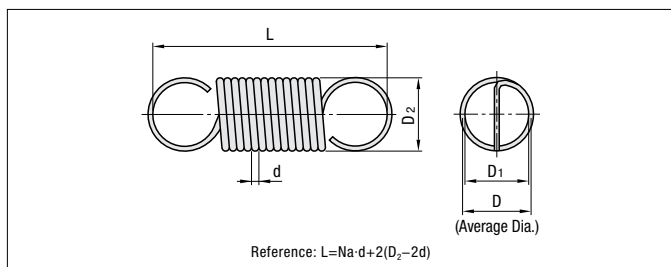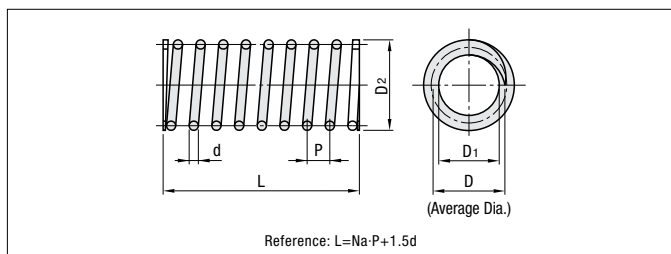

#### 1.2 Basic Formulae Used in Designing of Springs

##### 1.2.1 Compression Springs, and Tension Springs without Initial Tension

$$\delta = \frac{8N_a D^3 P}{Gd^4} \quad (1) \quad \tau = \chi \tau_0 \quad (5)$$

$$k = \frac{P}{\delta} = \frac{Gd^4}{8N_a D^3} \quad (2) \quad d = \sqrt[3]{\frac{8DP}{\pi \tau_0}} = \sqrt[3]{\frac{8\chi DP}{\pi \tau}} \quad (6)$$

$$\tau_0 = \frac{8DP}{\pi d^3} \quad (3) \quad N_a = \frac{Gd^4 \delta}{8D^3 P} = \frac{Gd^4}{8D^3 k} \quad (7)$$

$$\tau_0 = \frac{Gd\delta}{\pi N_a D^2} \quad (4) \quad U = \frac{P\delta}{2} = \frac{k\delta^2}{2} \quad (8)$$

##### 1.2.2 Tension Springs with Initial Tension (Where: P > P<sub>i</sub>)

$$\delta = \frac{8N_a D^3 (P - P_i)}{Gd^4} \quad (1') \quad \tau = \chi \tau_0 \quad (5')$$

$$k = \frac{P - P_i}{\delta} = \frac{Gd^4}{8N_a D^3} \quad (2') \quad d = \sqrt[3]{\frac{8DP}{\pi \tau_0}} = \sqrt[3]{\frac{8\chi DP}{\pi \tau}} \quad (6')$$

$$\tau_0 = \frac{8DP}{\pi d^3} \quad (3') \quad N_a = \frac{Gd^4 \delta}{8D^3 (P - P_i)} = \frac{Gd^4 \delta}{8D^3 (P - P_i)} \quad (7')$$

$$\tau_0 = \frac{Gd\delta}{\pi N_a D^2} + \tau_i \quad (4') \quad U = \frac{(P + P_i)\delta}{2} \quad (8')$$

#### 1.3 Points to Note when Designing Springs

##### 1.3.1 Shear Modulus of Elasticity

Shear modulus of elasticity(G) listed in Table 2 is recommended for the designing of springs.

Table 2. Shear Modulus of Elasticity(G)

Material	G Value N/mm <sup>2</sup> (kgf/mm <sup>2</sup> )	Symbol
Spring Steel	78×10 <sup>3</sup> {8×10 <sup>3</sup> }	SUP6, 7, 9, 9A, 10, 11A, 12, 13
Hard Steel Wire	78×10 <sup>3</sup> {8×10 <sup>3</sup> }	SW-B, SW-C
Piano Wire	78×10 <sup>3</sup> {8×10 <sup>3</sup> }	SWP
Oil Tempered Steel Wire	78×10 <sup>3</sup> {8×10 <sup>3</sup> }	SWO, SWO-V, SWOC-V, SWOSC-V, SWOSM, SWOSC-B
Stainless Steel Wire	SUS 302	SUS 302
	SUS 304	SUS 304
	SUS 304N1	SUS 304N1
	SUS 316	SUS 316
SUS 631 J1	74×10 <sup>3</sup> {7.5×10 <sup>3</sup> }	SUS 631 J1

##### 1.3.2 Number of Active Winding

The number of active winding can be determined as follows.

###### (1) Compression Springs

$$N_a = N_t - (X_1 + X_2)$$

Where X<sub>1</sub> and X<sub>2</sub> are the number of turns at each end of the coil.

###### (a) When only the end of the coil is in contact with the next free coil

[Corresponding to (a) ~ (c) in Fig.2]

$$X_1 = X_2 = 1$$

$$\text{Therefore, } N_a = N_t - 2$$

###### (b) When the end of the coil is not in contact with the next coil, and the spring end has $\frac{3}{4}$ of a turn.

[Corresponding to (a) ~ (e) in Fig.2]

$$X_1 = X_2 = 0.75$$

$$\text{Therefore, } N_a = N_t - 1.5$$

###### (2) Tension Springs

The number of active winding can be determined as follows. But hooks are ignored.


$$N_a = N_t$$



**1.3.3 Stress Correction Factor**

The stress correction factor relative to the spring index (C) can be determined by using the following formula or based on Fig.1.

$$X = \frac{4c-1}{4c-4} + \frac{0.615}{c} \dots\dots\dots (9)$$

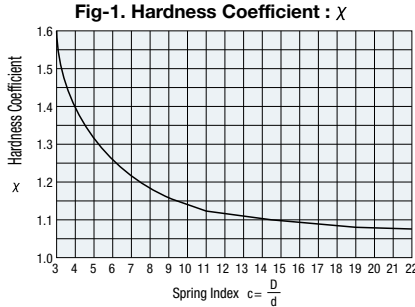

**1.3.4 Solid Length**

The solid length of a spring can normally be obtained by using the following simplified formula. Generally, the purchaser of a compression spring does not specify the solid length of the spring.

$$H_s = (N_s - 1)d + (t_1 + t_2) \dots\dots\dots (10)$$


where, (t<sub>1</sub>+t<sub>2</sub>) : is the sum of the thicknesses of the coil ends.

As for those compression springs, both ends of which are shaped as shown in (b), (c), (e) or (f) of Figure 2 and for which the solid length needs to be specified, the following formula can be used to obtain the maximum solid length. However, the actual maximum solid length can be greater than the value thus calculated depending on the shape of the spring in question.

$$H_s = N_s \times d_{max} \dots\dots\dots (11)$$

where d<sub>max</sub> : d is the material diameter with the maximum tolerance.

**Fig-2. Coil End Shape**

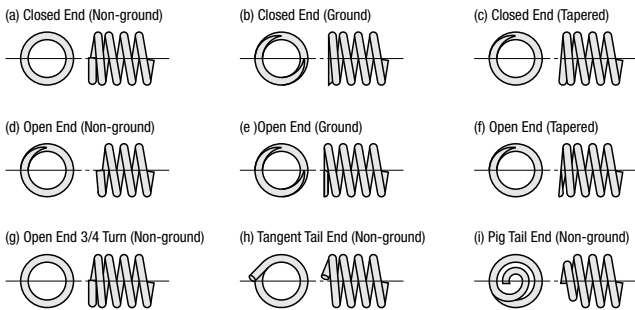


**1.3.5 Initial Tension of Tension Springs**

Cold-formed solid-coiled tension springs are subjected to initial tension (P<sub>i</sub>). The initial tension can be obtained using the following formula.

$$P_i = \frac{\pi d^3}{8D} \tau_i \dots\dots\dots (12)$$

On solid-coiled piano wire, hard steel wire, and other steel wires that are not low-temperature annealed, the initial stress occurs within the hatched range shown in Fig.3. However, if materials other than steel wire are used, or the wire in question is low-temperature annealed, the initial stress taken from within the hatched range in Fig.3 should be corrected as follows.

**Fig-3 Initial Stress : τ<sub>i</sub>** (Spring formed from steel coil, not low-temperature annealed)

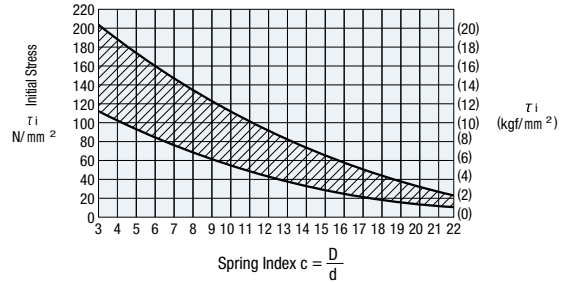

- (1) When using stainless steel wire, decrease the initial stress value for steel wire by 15%.
  - (2) If the spring is low-temperature annealed after being formed, decrease the value by 20~35% for springs made of piano wire, hard steel wire, or other stainless steel wires, and by 15~25% for springs made of stainless steel wire.
- Reference In place of Fig.3, the following empirical formula can be used to establish the initial stress for springs before low-temperature annealing.

$$\tau_i = \frac{G}{100c}$$

The following examples are for applications of this formula to obtain the initial tension.

- (1) Piano Wire / Hard Steel Wire [G=78×10<sup>3</sup>N/mm<sup>2</sup>{8×10<sup>3</sup>kgf/mm<sup>2</sup>}]
  - Initial Stress  $\tau_i = \frac{G}{100c} \times 0.75$  (0.75 by 25, reduction by low-temperature annealing).
  - Initial Tension  $P_i = \frac{\pi d^3}{8D} \tau_i = \frac{Gd^4}{255D^2} \times 0.75 = \frac{229d^4}{D^2} \left\{ \frac{24d^4}{D^2} \right\}$
- (2) When using stainless steel wire [G=69×10<sup>3</sup>N/mm<sup>2</sup>{7×10<sup>3</sup>kgf/mm<sup>2</sup>}]
  - Initial Stress  $\tau_i = \frac{G}{100c} \times 0.8$  (0.8 by 20, reduction by low-temperature annealing).
  - Initial Tension  $P_i = \frac{\pi d^3}{8D} \tau_i = \frac{Gd^4}{255D^2} \times 0.8 = \frac{216d^4}{D^2} \left\{ \frac{22d^4}{D^2} \right\}$

**1.3.6 Surging**

In order to prevent surging, the spring selected should be as that its natural frequency does not resonate with any of the natural frequencies that may act upon the spring.

The initial tension can be obtained using the following formula.

$$f = a \sqrt{\frac{kg}{W}} = a \frac{70d}{\pi N_s D^2} \sqrt{\frac{G}{\omega}} \dots\dots\dots (13)$$

Where, a =  $\frac{i}{2}$  : when both spring ends are either free or fixed

$$a = \frac{2-i}{4} : \text{When one spring end is fixed while the other end is free } i=1,2,3$$

G=78×10<sup>3</sup>N/mm<sup>2</sup>{8×10<sup>3</sup>kgf/mm<sup>2</sup>},  
w=76.93×10<sup>3</sup> N/mm<sup>3</sup>{7.85×10<sup>3</sup>kgf/mm<sup>3</sup>} If both spring ends are either free or fixed, the natural primary frequency of a spring can be obtained as follows.

$$f_1 = 3.56 \times 10^5 \frac{d}{NaD^2} \dots\dots\dots (13')$$

**1.3.7 Other Points to Note**

In spring design calculations, the following points should also be taken into account.

- (1) **Spring Index** Excessive local stress can result from too small spring index. Machinability is compromised if the spring index is too great or small. The spring index should be selected from the range of 4~15 when hot forming, and from the range of 4~22 when cold forming.
- (2) **Slenderness Ratio** In order to ensure the correct number of active winding, the slenderness ratio for a compression spring (Ratio of free height to coil mean diameter) should be 0.8 or greater. Furthermore, buckling considered, it is generally recommended that the slenderness ratio be selected from the range of 0.8~4 to prevent buckling.
- (3) **Number of Active Winding** The number of active winding should be 3 or more in order to stabilize spring characteristics.
- (4) **Pitch** Generally, when the pitch exceeds 0.5D, the spring deflection (load) increases to the extent that the coil diameter changes. This requires correction of the deflection and torsional stress values obtained by the basic formulae. Therefore, the pitch should be 0.5D or smaller. The pitch can generally be estimated using the following simplified formula.

$$p = \frac{L-H_s}{N_a} + d \dots\dots\dots (14)$$



# Technical Data

## Designing of Chain Drive Mechanism 1

### Selection of Power Transmission Efficiency

The table of transmission performance in this catalog (P. 235) is based on the following conditions.

- 1) The chain drive mechanism is run in an atmosphere with a temperature of -10°C~+60°C and with no abrasive particles.
- 2) There is no adverse impact on the mechanism, such as corrosive gas or high humidity.
- 3) The two shafts between which power is transmitted are parallel with each other and correctly installed.
- 4) The recommended lubrication method and oil are used.
- 5) The power transmission is subjected to minimum load variation.

### Power Transmission Coefficient for Multiple Chains


On multiple roller chains, the load is not shared evenly between each chain row. Therefore, the power transmission efficiency of multiple roller chains cannot be obtained by simply multiplying the power transmission efficiency of a single chain by the number of chain rows. The power transmission efficiency of multiple roller chains should be obtained by multiplying the power transmission efficiency of a single chain by the multiple chain power transmission coefficient.

**Table 2. Power Transmission Coefficient for Multiple Chains**

Number of Roller Chain Rows	Multiple Row Coefficient
2 lines	x1.7
3 lines	x2.5
4 lines	x3.3
5 lines	x3.9
6 lines	x4.6

### Selection Guide Table

**Table 3. Selection Guide Table**

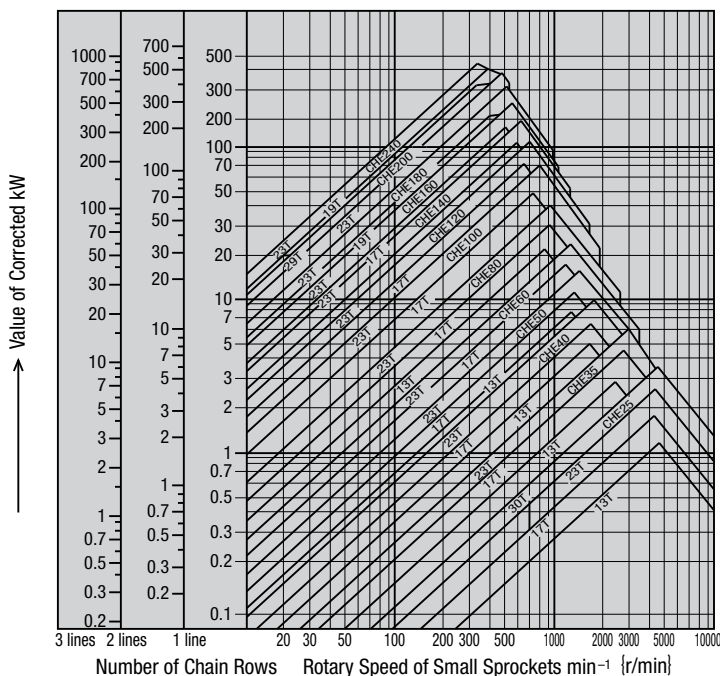

### Application Coefficient Table

The power transmission efficiency table (P. 235) is based on minimum load variation. The transmitted kW shown in the table should be corrected as follows depending on the actual magnitude of load variation.

**Table 1. Application Coefficient Table**

Impact Type	Prime Motor Type Typical	Turbine Motor	Internal Combustion Engine	
			With Fluidic Mechanism	Without Fluidic Mechanism
Smooth Transmission	Belt conveyor with small load variation, Chain conveyor, Centrifugal pump, Centrifugal blower, General textile machinery, General machinery with small load variation.	x1.0	x1.0	x1.2
Transmission with Moderate Impact	Centrifugal compressor, Marine propeller, Conveyor with moderate load variation, Automatic furnace, Drier, Pulverizer, General machine tools, Compressor, General earth-moving machinery, General paper manufacturing machinery	x1.3	x1.2	x1.4
Transmission with Large Impact	Press, Crusher, Construction and mining machinery, Vibrator, Oil well digger, Rubber mixer, Roll, Rollgang, General machinery with reverse or impact load	x1.5	x1.4	x1.7

#### How to Read The Table

Ex. Corrected kW=5kW  
Rotary Speed of Small Sprockets=300r/min  
When single chain

The intersection point of the vertical axis (corrected kW) and the horizontal axis (rotary speed 300r/min) is below CHE 60 23T (23 toothed) and above 17T (17 toothed). A closer look at the location of the intersection point indicates that it most probably corresponds to 19T.





## ■ Specification Selection for Operation Under Normal Conditions

### 1. Operating Conditions

When selecting roller chains, the following 7 parameters should be taken into account.

1. Machine to be used
2. Impact Type
3. Prime Motor Type
4. Power Transmission(kW)
5. Diameter and Rotary Speed of High-Speed Shaft
6. Diameter and Rotary Speed of Low-Speed Shaft
7. Inter-Shaft Distance

### 2. Application Coefficient

Select the application coefficient from the application table (Table 1) that is appropriate for the machine to be driven and the prime motor type.

### 3. Corrected Power Transmission(kW)

Correct the power transmission(kW) using the application coefficient.

- Single Chain... Corrected Power Transmission(kW)=Power Transmission(kW)×Application Coefficient
- Multiple Chains... Select the appropriate coefficient from the table multiple-chain power transmission coefficients (Table 2).

$$\text{Corrected Power Transmission(kW)} = \frac{\text{Power Transmission(kW)} \times \text{Application Coefficient}}{\text{Multiple Row Coefficient}}$$

### 4. Chain and Number of Sprocket Teeth

Using the selection guide table (Table 3) or the power transmission efficiency tables, select the chain and the number of small sprocket teeth that satisfy the rotary speed of the high-speed shaft and the corrected power transmission(kW). The chain pitch should be as small as possible, as long as the required power transmission efficiency is achieved. This should minimize noise and ensure smooth transmission of power. (If a single chain does not provide the required power transmission efficiency, use multiple chains instead. If the installation space requires that the inter-shaft distance as well as the outer diameter of sprocket be minimized, use small-pitch multiple chains.) There should be a minimum wrap angle of 120° between the small sprocket and the chain.

### 5. Number of Large Sprocket Teeth

Number of Large Sprocket Teeth = Number of Small Sprocket Teeth × Speed Ratio Once the number of small sprocket teeth is determined, multiplying this by the speed ratio provides the number of large sprocket teeth. Generally, the appropriate number of small sprocket teeth is 17 or greater, or 21 or greater for high-speed operation, or 12 or greater for low speed operation. The number of large sprocket teeth should be 120 or less. Select the sprocket with as great a number of teeth as possible for a speed ratio of 1:1 or 2:1. The speed ratio should normally be 1:7 or less, and ideally 1:5.

### 6. Shaft Diameter

Ensure that the small sprocket selected as above is compatible with the diameter of the existing shaft on which it is to be installed. Refer to the specification table on this page. When the shaft diameter is too large for the bore in the sprocket, select another sprocket with a greater number of teeth or a larger chain.


### 7. Inter-shaft Distance between Sprockets

The distance between the shafts can be reduced as long as the sprockets do not interfere with each other and the wrap angle between the small sprocket and the chain is 120° or more.

Generally, the inter-shaft distance should preferably be 30~50 times the pitch of the chain used. Under pulsating load conditions, decrease the distance to 20 times the chain pitch or less.

## 8. Chain Length and Distance between Shaft Centers

Once the chain, the number of teeth on both sprockets, and the inter-shaft distance are available, determine the number of chain links as follows.

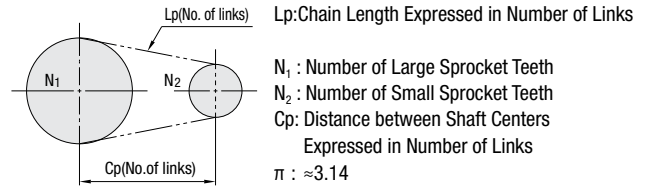

(1) Calculating the chain length (when the number of sprocket teeth  $N_1$  and  $N_2$  and the distance between shaft centers  $C_p$  are available)

$$L_p = \frac{N_1 + N_2}{2} + 2C_p + \frac{\left(\frac{N_1 - N_2}{2\pi}\right)^2}{C_p}$$

\*Round up decimals of  $L_p$  to the next whole number.

Generally, when the chain length number of chain links obtained is an odd number, this should be raised to the next even number. When the inter-shaft distance demands the chain length to be an odd number, an offset link needs to be used. However, it should be avoided and an even number should be used as much as possible by adjusting the number of sprocket teeth or the inter-shaft distance.

(2) Calculating the distance between shaft centers (when the number of sprocket teeth  $N_1$  and  $N_2$  as the chain length  $L_p$  are available)

$$C_p = \frac{1}{8} \left\{ 2L_p - N_1 - N_2 + \sqrt{(2L_p - N_1 - N_2)^2 - \frac{8}{\pi^2} (N_1 - N_2)^2} \right\}$$

The pitch number obtained by the chain length formula is, in most cases, only approximate and not in exact agreement with a given inter-shaft distance. Therefore, it will be necessary to calculate the exact distance between the shaft centers based on the required overall length.

## ■ Example of Selection for Operation Under Normal Conditions

The following is an example of selection when a 3.7 kW 1,000r/min electric (motor) is used to drive a compressor.

### [1] Operating Conditions

- 1) Machine to be used ..... Compressor, 10 hours operation
- 2) Impact Type ..... Smooth Transmission
- 3) Prime Motor Type ..... Electric Motor
- 4) Power Transmission ..... 3.7kW
- 5) Rotary Speed ..... 1000r/min

### [2] Application Coefficient

From Table 1, an application coefficient of 1.2 is selected.

### [3] Corrected Power Transmission(kW)

$$\text{Corrected Power Transmission(kW)} = \text{Power Transmission(kW)} \times \text{Application Coefficient} = 3.7\text{kW} \times 1.2 = 4.44\text{kW}$$

### [4] Chain and Number of Sprocket Teeth

Searching the selection guide table (Table 3) for a combination of 1,000 r/min and 4.44 kW provides a CHE40 chain and 17T sprocket.

On the power transmission efficiency table for the CHE40 chain, a combination of 13T and 1,000r/min provides a power transmission efficiency of 4.09 kW, which does not meet the required 4.44 kW. Therefore, 19T, which achieves 4.6 kW, should be selected to meet the requirement.

Results The CHE40 chain should be selected.

Number of Small Sprocket Teeth=19T



## Technical Data

### Designing of Chain Drive Mechanism 2

#### ■ Specification Selection for Low-Speed Operation

In operations using a chain speed of 50 m/min. or less, chain elongation due to wear can almost be ignored. Under such low-speed conditions, the service life of the chain largely depends on its fatigue strength. Low-speed operation is more economical than operation under "normal conditions". Low speed is recommended for operations with fewer startups and stops that enable smooth power transmission. Selection of ambient atmosphere, layout, lubrication, etc. for low-speed operation is the same as that for operation under normal conditions. Selection should be made in accordance with the following formula.

$$\text{Max. Allowable Tension of Chain} \geq \text{Max. Tension N Working on Chain} \times \text{Application Coefficient (Table 1) P. 232} \times \text{Speed Coefficient (Table 4)}$$

Table 4. Speed Coefficients

Roller Chain Speed	Speed Coefficient
0~15 m/min	1.0
15~30	1.2
30~50	1.4
50~70	1.6

[1] Operating Conditions

Same as for "Specifications Selection for Operation under Normal Conditions"

[2] Chain and Number of Small Sprocket Teeth

From the selection guide table 3 (P. 232), select a chain and a sprocket slightly undersized for the rotary speed (r/min) and the prime mover (kW) used.

[3] Calculating the Chain Speed

Based on the sprocket selected(chain pitch, number of teeth)and the number of revolutions (r/min), calculate the chain speed as follows.

$$V = \frac{P \cdot N \cdot n}{1000} \text{ (m/min)}$$

V : Chain Speed(m/min)  
P : Chain Pitch(mm)  
N : Number of Sprocket Teeth  
n : Rotary of Sprocket Teeth(r/min)

[4] Calculating the Max. Working Load on Chain

Calculating the Maximum Working Load on the Chain

$$F = \frac{60 \cdot kW}{V} \text{ (kN)}$$

F : Load on Chain(kN)  
V : Chain Speed(m/min)  
kW : Power Transmission(kW)

[5] Application Coefficient

From the application coefficient table (Table 1), select the appropriate coefficient.

[6] Speed Coefficient

Based on the chain speed obtained in [3] above, calculate the appropriate speed coefficient.

[7] Maximum Allowable Tension of Chain

In the formula, substitute the values obtained in [4]~[6] above as well as the maximum allowable tension (obtained from actual products) for the chain selected in [2] above. Check whether these values satisfy the formula. If not, try again with another chain and sprocket set.

[8] Number of Large Sprocket Teeth, Shaft Diameter, and Chain Length same as for "Specification Selection for Operation under Normal Conditions".

#### ■ Specification Selection for Low-Speed Operation with Impact Load

In operations with a great amount of impact loading due to frequent startups, stops, reversing, or braking, the inertia ( $GD^2$ ) of the prime mover and the driven machine needs to be taken into account.

Under such conditions, exercise extreme caution, as the chain can be subjected to loads much greater than in operation under normal conditions.


Select the chain using the following formula.

$$\text{Max. Allowable Load of Chain N} \geq \text{Load Acting on Chain as Calculated from the Starting Torque of the Prime Mover} \times \text{Impact} \times \text{Speed}$$

#### Impact Coefficient

This is a constant, shown in (Table 5), determined by the ratio of inertia ( $GD^2$ ) of prime mover to driven machine as well as the magnitude of play in the power transmission mechanism used. When the power transmission mechanism has excessive play, it loads greater impact than those in the table can result.

Table 5. Impact Coefficient

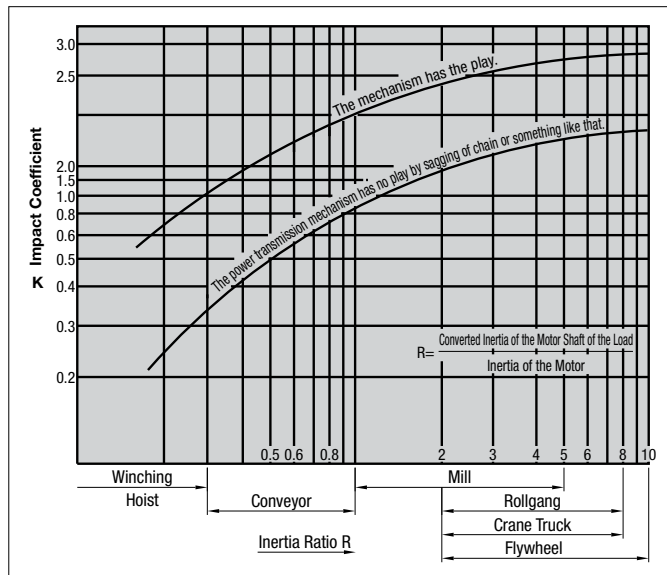

#### ■ Selection of Stainless Roller Chains (CHES)

Selection of stainless roller chains follows the specification selection for low-speed operation.

- 1). The maximum allowable tension for CHES (stainless type) is lower than that for CHE (steel type).
- 2). Avoid using offset links as much as possible.



■ Selection Based on Temperature

Selection of Roller Chains Based on Temperature

The following table shows selection criteria for roller chains by size based on temperature and the associated reduction in strength.

- 1) Problems associated with roller chain operation at high temperature
  - (1) Reduced hardness and resultant increase in wear
  - (2) Elongation due to softening
  - (3) Poor lubrication and flexing and wear increase due to oil deterioration and carbonization
  - (4) Wear increase and poor flexing due to scale
- 2) Problems associated with roller chain operation at low temperature
  - (1) Low-temperature brittleness and resultant reduction in impact strength
  - (2) Solidification of lubricating oil
  - (3) Poor flexing due to attachment of frost and ice

Guide Table for Roller Chain Power Transmission Efficiency at High, Low Temperature

Temperature	CHE Roller Chain	
	CHE60 or Less	CHE80 or Above
-60°C or below	—	—
-60°C ~ -50°C	—	—
-50°C ~ -40°C	—	Cannot Be Used
-40°C ~ -30°C	Cannot Be Used	Catalog Value×1/4
-30°C ~ -20°C	Catalog Value×1/4	Catalog Value×1/3
-20°C ~ -10°C	Catalog Value×1/3	Catalog Value×1/2
-10°C ~ 60°C	Catalog Value	Catalog Value
60°C ~ -150°C	Catalog Value	Catalog Value
150°C ~ 200°C	Catalog Value×3/4	Catalog Value×3/4
200°C ~ 250°C	Catalog Value×1/2	Catalog Value×1/2
Above 250°C	Cannot Be Used	Cannot Be Used

Selection of Stainless Roller Chains for High-Temperature Operation

- (1) Follow the specification selection for low-speed operation up to 400°C.  
(Do not use the specification selection method for operation under normal conditions.)
- (2) Above 400°C, use the temperature coefficient described below.
- (3) Formula

$$\text{Max. Working Load on Chain} \times \text{Application Coefficient (Table 1)} \times \text{Speed Coefficient (Table 4)} \times \text{Temperature Coefficient (Kt)} \leq \text{Max. Allowable Tension of Chain}$$

Temperature Coefficient (Kt)

Temperature	Coefficient (Kt)
400°C Less	1.0
400°C ~ 500°C	1.2
500°C ~ 600°C	1.5
600°C ~ 700°C	1.8
Above 700°C	Cannot Be Used

Take account of corrosion resistance, which begins to decline above 400°C.

■ Power and Torque

$$\left. \begin{array}{l} 1\text{kW}=102\text{kgf}\cdot\text{m}/\text{sec} \quad 1\text{PS}=735.5\text{W (Metric Power)} \\ 1\text{kW}=1000\text{W} \quad 1\text{HP}=745.7\text{W (Imperial Power)} \end{array} \right\} \approx 750\text{W}$$

- \*Torque : 1kg·m=100kg·cm
- 1kg·m=9.8N·m (newton metre)
- 1N·m=0.120kg·m
- 1r/min = 1rpm

Obtaining Power from Torque and Rotary Speed

$$\text{Output (kW)} = \frac{\text{Torque (N}\cdot\text{m)} \times \text{Rotary speed (r/min)}}{9.55 \times 1000}$$

CHE35 (Single Chain)

(kW)

Number of Small Sprocket Teeth	Rotary Speed of Small Sprockets min (r/min)																								
	50	100	300	500	700	900	1200	1500	1800	2100	2500	3000	3500	4000	4500	5000	5500	6000	6500	7000	7500	8000	8500	9000	10000
9	0.06	0.11	0.29	0.46	0.63	0.79	1.02	1.25	1.48	1.69	1.98	1.62	1.29	1.05	0.88	0.75	0.66	0.57	0.51	0.46	0.41	0.37	0.34	0.31	0.27
10	0.07	0.12	0.33	0.52	0.71	0.89	1.15	1.40	1.65	1.89	2.22	1.90	1.51	1.23	1.04	0.88	0.77	0.67	0.60	0.53	0.48	0.43	0.40	0.37	0.31
11	0.07	0.13	0.37	0.57	0.78	0.98	1.27	1.55	1.83	2.10	2.46	2.19	1.74	1.42	1.19	1.02	0.88	0.78	0.69	0.61	0.55	0.50	0.46	0.43	0.36
12	0.08	0.15	0.40	0.63	0.86	1.07	1.40	1.71	2.01	2.31	2.70	2.50	1.98	1.62	1.36	1.16	1.01	0.88	0.78	0.70	0.63	0.57	0.52	0.48	0.41
13	0.09	0.16	0.44	0.69	0.94	1.17	1.52	1.86	2.19	2.52	2.95	2.81	2.24	1.83	1.53	1.31	1.13	0.99	0.88	0.79	0.71	0.65	0.59	0.54	0.46
14	0.10	0.18	0.47	0.75	1.01	1.28	1.65	2.01	2.37	2.73	3.19	3.15	2.50	2.04	1.72	1.46	1.27	1.11	0.98	0.88	0.80	0.72	0.66	0.60	0.51
15	0.10	0.19	0.51	0.81	1.10	1.37	1.78	2.17	2.56	2.94	3.44	3.49	2.77	2.27	1.90	1.62	1.40	1.23	1.10	0.98	0.88	0.80	0.73	0.67	0.57
16	0.11	0.20	0.54	0.87	1.17	1.47	1.90	2.33	2.75	3.15	3.69	3.84	3.05	2.50	2.10	1.79	1.55	1.36	1.21	1.08	0.97	0.88	0.81	0.74	0.63
17	0.12	0.22	0.58	0.93	1.25	1.57	2.04	2.48	2.93	3.36	3.94	4.21	3.34	2.74	2.29	1.95	1.69	1.49	1.32	1.18	1.07	0.97	0.88	0.81	0.69
18	0.13	0.23	0.62	0.98	1.33	1.67	2.16	2.64	3.12	3.58	4.19	4.59	3.64	2.98	2.50	2.13	1.85	1.62	1.44	1.29	1.16	1.05	0.96	0.88	0.75
19	0.13	0.25	0.66	1.04	1.41	1.77	2.29	2.80	3.30	3.80	4.44	4.98	3.95	3.23	2.71	2.31	2.01	1.76	1.56	1.40	1.26	1.14	1.04	0.95	0.82
20	0.14	0.26	0.69	1.10	1.49	1.87	2.42	2.96	3.49	4.01	4.69	5.37	4.27	3.49	2.94	2.50	2.16	1.90	1.69	1.51	1.36	1.23	1.13	1.04	0.88
21	0.15	0.28	0.73	1.16	1.57	1.97	2.55	3.13	3.68	4.23	4.95	5.78	4.59	3.75	3.15	2.69	2.33	2.04	1.81	1.62	1.46	1.33	1.21	1.11	0.95
22	0.16	0.28	0.77	1.22	1.66	2.07	2.69	3.28	3.87	4.47	5.20	6.12	4.92	4.03	3.37	2.88	2.50	2.19	1.95	1.74	1.57	1.42	1.30	1.19	1.02
23	0.16	0.30	0.81	1.28	1.74	2.18	2.82	3.45	4.06	4.66	5.45	6.43	5.26	4.30	3.60	3.08	2.67	2.34	2.08	1.86	1.68	1.52	1.39	1.28	1.09
24	0.17	0.31	0.85	1.34	1.82	2.28	2.95	3.61	4.25	4.89	5.71	6.73	5.60	4.59	3.84	3.28	2.84	2.50	2.22	1.98	1.79	1.62	1.48	1.36	1.16
25	0.18	0.33	0.89	1.40	1.90	2.38	3.08	3.77	4.44	5.10	5.97	7.03	5.96	4.88	4.09	3.49	3.02	2.66	2.36	2.10	1.90	1.72	1.57	1.45	1.23
26	0.19	0.34	0.93	1.46	1.98	2.48	3.22	3.93	4.63	5.33	6.23	7.34	6.32	5.17	4.33	3.70	3.21	2.81	2.50	2.24	2.01	1.83	1.67	1.53	1.31
28	0.20	0.37	1.00	1.58	2.15	2.69	3.48	4.26	5.02	5.77	6.75	7.98	7.06	5.78	4.84	4.14	3.59	3.15	2.79	2.50	2.25	2.04	1.87	1.72	1.46
30	0.22	0.40	1.08	1.71	2.31	2.90	3.75	4.59	5.41	6.21	7.27	8.58	7.83	6.41	5.37	4.59	3.98	3.49	3.10	2.77	2.50	2.27	2.07	1.90	1.62
32	0.23	0.43	1.16	1.83	2.48	3.11	4.02	4.92	5.80	6.60	7.76	9.18	8.65	7.06	5.92	5.05	4.38	3.84	3.41	3.05	2.75	2.50	2.28	2.10	0
35	0.25	0.48	1.28	2.01	2.73	3.42	4.44	5.42	6.39	7.34	8.58	10.1	9.85	8.06	6.77	5.78	5.01	4.40	3.90	3.49	3.15	2.86	2.61	2.40	0
40	0.29	0.54	1.47	2.33	3.16	3.95	5.13	6.27	7.38	8.50	9.92	11.7	12.1	9.85	8.28	7.06	6.12	5.37	4.77	4.27	3.84	3.49	0	0	0
45	0.34	0.62	1.67	2.65	3.58	4.49	5.82	7.11	8.36	9.62	11.3	13.3	14.4	11.8	9.85	8.43	7.30	6.41	5.68	5.09	0	0	0	0	0
Lubrication Method	A			B									C												

Lubrication Method A: Drop Lubrication, B: Oil Bath Lubrication C: Forced Circulation Lubrication by Pump Not applicable to selection of CHES-type chains.



# Technical Data

## Designing of Chain Drive Mechanism 3

### CHE40 (Single Chain)

(kW)

Number of Small Sprocket Teeth	Rotary Speed of Small Sprockets min (r/min)																										
	10	25	50	100	200	300	400	500	700	900	1000	1200	1400	1600	1800	2100	2400	2700	3000	3500	4000	5000	6500	7000	8000		
9	0.03	0.07	0.14	0.26	0.48	0.69	0.90	1.10	1.49	1.87	2.05	2.42	2.78	3.07	2.57	2.04	1.67	1.40	1.19	0.95	0.78	0.56	0.43	0.34	0.28		
10	0.04	0.08	0.16	0.29	0.54	0.78	1.01	1.23	1.67	2.10	2.31	2.72	3.12	3.51	3.01	2.39	1.96	1.64	1.40	1.11	0.91	0.65	0.49	0.40	0.32		
11	0.04	0.09	0.17	0.32	0.60	0.87	1.12	1.37	1.85	2.32	2.55	3.01	3.45	3.89	3.48	2.76	2.26	1.89	1.62	1.28	1.05	0.75	0.57	0.46	0.37		
12	0.04	0.10	0.19	0.35	0.66	0.95	1.23	1.50	2.04	2.55	2.80	3.30	3.80	4.28	3.96	3.15	2.57	2.16	1.84	1.46	1.19	0.86	0.65	0.51	0.43		
13	0.04	0.11	0.21	0.39	0.72	1.04	1.34	1.64	2.22	2.78	3.06	3.60	4.14	4.67	4.47	3.55	2.90	2.43	2.08	1.65	1.35	0.96	0.73	0.58	0.48		
14	0.05	0.12	0.22	0.42	0.78	1.12	1.45	1.78	2.40	3.01	3.31	3.90	4.48	5.06	5.00	3.96	3.25	2.72	2.32	1.87	1.51	1.09	0.82	0.65	0.53		
15	0.05	0.13	0.24	0.45	0.84	1.21	1.57	1.91	2.59	3.25	3.57	4.21	4.83	5.45	5.54	4.39	3.60	3.01	2.57	2.04	1.67	1.19	0.91	0.72	0.59		
16	0.06	0.14	0.26	0.48	0.90	1.30	1.68	2.05	2.78	3.48	3.83	4.51	5.18	5.84	6.10	4.84	3.96	3.32	2.83	2.25	1.87	1.32	1.00	0.80	0.65		
17	0.06	0.15	0.28	0.51	0.96	1.38	1.79	2.19	2.96	3.72	4.09	4.81	5.53	6.24	6.68	5.30	4.34	3.64	3.11	2.47	2.02	1.45	1.10	0.87	0.72		
18	0.07	0.16	0.29	0.54	1.02	1.47	1.90	2.33	3.15	3.95	4.34	5.12	5.88	6.63	7.28	5.78	4.73	3.96	3.39	2.69	2.20	1.57	1.19	0.95	0		
19	0.07	0.16	0.31	0.58	1.09	1.66	2.02	2.47	3.34	4.19	4.60	5.42	6.24	7.03	7.83	6.27	5.13	4.30	3.67	2.92	2.39	1.71	1.30	1.03	0		
20	0.07	0.18	0.33	0.61	1.14	1.65	2.13	2.61	3.53	4.43	4.87	5.74	6.59	7.43	8.28	6.77	5.54	4.64	3.96	3.15	2.57	1.87	1.40	1.11	0		
21	0.08	0.19	0.34	0.65	1.21	1.74	2.25	2.75	3.72	4.67	5.13	6.05	6.95	7.83	8.73	7.28	5.96	5.00	4.27	3.39	2.77	1.98	1.51	1.19	0		
22	0.08	0.19	0.37	0.68	1.27	1.83	2.36	2.89	3.92	4.91	5.39	6.36	7.30	8.21	9.18	7.83	6.36	5.36	4.57	3.63	2.97	2.13	1.62	1.28	0		
23	0.09	0.20	0.38	0.72	1.33	1.92	2.48	3.04	4.11	5.15	5.66	6.67	7.68	8.65	9.62	8.36	6.83	5.73	4.89	3.88	3.18	2.28	1.73	1.37	0		
24	0.10	0.22	0.40	0.75	1.40	2.01	2.60	3.18	4.30	5.39	5.93	6.98	8.06	9.03	10.1	8.88	7.28	6.10	5.21	4.13	3.39	2.42	1.84	1.46	0		
25	0.10	0.22	0.42	0.78	1.45	2.10	2.72	3.32	4.49	5.63	6.19	7.30	8.36	9.47	10.5	9.47	7.76	6.49	5.54	4.39	3.60	2.57	1.96	1.51	0		
26	0.10	0.23	0.43	0.81	1.52	2.19	2.83	3.46	4.68	5.88	6.46	7.61	8.73	9.85	11.0	10.1	8.21	6.89	5.88	4.66	3.82	2.73	2.08	1.62	0		
28	0.11	0.25	0.47	0.88	1.64	2.37	3.07	3.75	5.08	6.37	7.01	8.28	9.47	10.7	11.9	11.2	9.18	7.68	6.56	5.21	4.27	3.05	2.32	1.80	0		
30	0.12	0.28	0.51	0.95	1.78	2.55	3.30	4.04	5.47	6.86	7.53	8.88	10.2	11.5	12.8	12.5	10.1	8.50	7.28	5.78	4.73	3.39	2.57	2.08	0		
32	0.13	0.29	0.54	1.01	1.90	2.74	3.54	4.33	5.86	7.36	8.06	9.55	11.0	12.3	13.7	13.7	11.2	9.40	8.06	6.37	5.21	3.73	3.0	2.32	0		
35	0.14	0.32	0.60	1.12	2.10	3.01	3.91	4.77	6.46	8.13	8.88	10.5	12.1	13.6	15.1	15.7	12.8	10.7	9.18	7.28	5.96	4.27	3.0	2.32	0		
40	0.16	0.37	0.69	1.30	2.42	3.48	4.51	5.51	7.46	9.33	10.3	12.2	14.0	15.7	17.5	19.2	15.7	13.1	11.2	8.88	7.28	5.21	4.0	3.0	2.32	0	
45	0.19	0.43	0.79	1.47	2.75	3.95	5.13	6.27	8.50	10.6	11.7	13.8	15.8	17.8	19.8	22.8	18.7	15.7	13.4	10.6	8.73	6.5	5.0	4.0	3.0	2.32	0
Lubrication Method	A						B						C														

Lubrication Method A: Drop Lubrication B: Oil Bath Lubrication C: Forced Circulation Lubrication by Pump Not applicable to selection of CHES-type chains. See P. 41 for CHEM Type.

### CHE50 (Single Chain)

(kW)

Number of Small Sprocket Teeth	Rotary Speed of Small Sprockets min (r/min)																								
	10	25	50	100	200	300	400	500	700	900	1000	1200	1400	1600	1800	2100	2400	2700	3000	3500	4000	4500	5000	5500	6000
9	0.07	0.14	0.27	0.50	0.94	1.35	1.75	2.14	2.90	3.64	4.00	4.71	4.49	3.67	3.08	2.44	2.00	1.68	1.43	1.13	0.93	0.78	0.66	0.57	0.51
10	0.07	0.16	0.31	0.57	1.05	1.51	1.69	2.40	3.25	4.07	4.48	5.28	5.26	4.30	3.60	2.86	2.34	1.96	1.68	1.33	1.09	0.91	0.78	0.67	0.59
11	0.08	0.18	0.34	0.63	1.16	1.68	2.18	2.66	3.60	4.52	4.97	5.86	6.06	4.96	4.16	3.30	2.70	2.27	1.93	1.54	1.25	1.05	0.90	0.78	0.69
12	0.09	0.19	0.37	0.69	1.28	1.84	2.39	2.92	3.96	4.96	5.45	6.43	6.91	5.65	4.74	3.76	3.08	2.58	2.20	1.75	1.43	1.20	1.02	0.89	0.78
13	0.10	0.22	0.40	0.75	1.40	2.01	2.61	3.19	4.31	5.41	5.95	7.01	7.76	6.38	5.34	4.24	3.47	2.91	2.48	1.97	1.61	1.35	1.16	1.00	0
14	0.10	0.23	0.43	0.81	1.51	2.18	2.83	3.45	4.68	5.86	6.45	7.61	8.73	7.12	5.98	4.74	3.88	3.25	2.76	2.20	1.81	1.51	1.29	1.12	0
15	0.11	0.25	0.47	0.87	1.63	2.35	3.04	3.72	5.04	6.32	6.95	8.21	9.40	7.91	6.62	5.26	4.30	3.60	3.08	2.44	2.00	1.68	1.43	1.24	0
16	0.12	0.27	0.50	0.94	1.75	2.52	3.26	3.99	5.40	6.77	7.45	8.80	10.1	8.73	7.30	5.79	4.74	3.97	3.39	2.69	2.20	1.84	1.57	1.37	0
17	0.13	0.29	0.54	1.00	1.87	2.69	3.48	4.26	5.77	7.23	7.98	9.40	10.7	9.55	7.98	6.34	5.19	4.35	3.72	2.95	2.41	2.02	1.72	1.50	0
18	0.13	0.31	0.57	1.07	1.98	2.86	3.71	4.53	6.13	7.68	8.43	10.0	11.4	10.4	8.73	6.91	5.65	4.74	4.04	3.21	2.63	2.20	1.88	1.62	0
19	0.14	0.32	0.60	1.13	2.10	3.04	3.93	4.80	6.51	8.13	8.95	10.6	12.2	11.3	9.47	7.46	6.13	5.14	4.39	3.48	2.85	2.39	2.04	1.77	0
20	0.15	0.34	0.64	1.19	2.22	3.21	4.16	5.07	6.87	8.58	9.47	11.2	12.8	12.2	10.2	8.06	6.62	5.55	4.74	3.76	3.08	2.58	2.20	1.91	0
21	0.16	0.36	0.67	1.26	2.34	3.38	4.38	5.35	7.24	9.10	10.0	11.8	13.5	13.1	11.0	8.73	7.12	5.98	5.10	4.04	3.31	2.78	2.37	2.07	0
22	0.16	0.38	0.71	1.37	2.47	3.55	4.60	5.62	7.61	9.55	10.5	12.4	14.2	14.0	11.8	9.33	7.61	6.41	5.47	4.34	3.55	2.98	2.54	2.20	0
23	0.17	0.40	0.75	1.39	2.59	3.73	4.83	5.90	7.98	10.0	11.0	13.0	14.9	15.0	12.6	10.0	8.21	6.85	5.85	4.64	3.80	3.19	2.70	2.32	0
24	0.19	0.42	0.78	1.45	2.71	3.90	5.06	6.18	8.36	10.5	11.6	13.6	15.6	16.0	13.4	10.7	8.73	7.30	6.23	4.95	4.04	3.39	3.0	2.63	0
25	0.19	0.43	0.81	1.51	2.83	4.08	5.28	6.46	8.73	11.0	12.1	14.2	16.3	17.0	14.2	11.3	9.25	7.76	6.62	5.26	4.30	3.60	3.0	2.63	0
26	0.20	0.46	0.85	1.58	2.95	4.25	5.51	6.74	9.10	11.4	12.6	14.8	17.0	18.1	15.1	12.0	9.85	8.21	7.03	5.57	4.57	3.83	3.0	2.63	0
28	0.22	0.49	0.92	1.72	3.20	4.61	5.98	7.30	9.85	12.4	13.7	16.0	18.4	20.1	16.9	13.4	11.0	9.18	7.83	6.23	5.10	4.27	3.0	2.63	0
30	0.23	0.53	0.99	1.85	3.45	4.97	6.44	7.83	10.70	13.5	14.7	17.3	19.8	22.4	18.7	14.8	12.2	10.2	8.73	6.91	5.65	4.0	3.0	2.63	0
32	0.25	0.57	1.06	1.98	3.70	5.33	6.90	8.43	11.4	14.3	15.7	18.6	21.3	24.0	20.7	16.4	13.4	11.3	9.62	7.61	6.23	5.0	3.0	2.63	0
35	0.28	0.63	1.17	2.19	4.07	5.86	7.61	9.33	12.6	15.7	17.3	20.4	23.5	26.5	23.6	18.7	15.4	12.8	11.0	8.73	7.12	5.0	3.0	2.63	0
40	0.32	0.72	1.35	2.52	4.71	6.77	8.80	10.70	14.5	18.2	20.0	23.6	27.1	30.6	28.9	22.9	18.7	15.7	13.4	10.7	8.0	5.0	3.0	2.63	0
45	0.36	0.82	1.54	2.86	5.34	7.68	10.0	12.2	16.5	20.7	22.8	26.8	30.8	34.6	34.4	27.3	22.4	18.7	16.0	11.0	8.0	5.0	3.0	2.63	



CHE60 (Single Chain)

(kW)

Number of Small Sprocket Teeth	Rotary Speed of Small Sprockets min (r/min)																								
	10	25	50	100	150	200	300	400	500	600	700	800	900	1000	1100	1200	1400	1600	1800	2000	2500	3000	3500	4000	4500
9	0.11	0.25	0.46	0.87	1.25	1.61	2.33	3.01	3.69	4.34	4.98	5.62	6.25	6.87	7.45	8.04	8.62	9.20	9.78	10.36	10.94	11.52	12.10	12.68	13.26
10	0.12	0.28	0.52	0.97	1.40	1.81	2.46	3.16	3.86	4.56	5.26	5.96	6.66	7.36	8.06	8.76	9.46	10.16	10.86	11.56	12.26	12.96	13.66	14.36	15.06
11	0.13	0.31	0.57	1.07	1.54	2.01	2.89	3.74	4.57	5.39	6.19	6.98	7.76	8.50	9.33	10.11	10.88	11.65	12.42	13.19	13.96	14.73	15.50	16.27	17.04
12	0.15	0.34	0.63	1.18	1.70	2.20	3.17	4.11	5.03	5.92	6.80	7.68	8.50	9.40	10.2	11.1	11.98	12.86	13.74	14.62	15.50	16.38	17.26	18.14	19.02
13	0.16	0.37	0.69	1.29	1.86	2.40	3.46	4.48	5.48	6.45	7.42	8.36	9.33	10.2	11.1	11.3	9.03	7.38	6.18	5.28	3.77	2.87	2.28	1.87	0
14	0.18	0.40	0.75	1.40	2.01	2.60	3.74	4.86	5.94	6.99	8.06	9.03	10.1	11.0	12.1	12.7	10.1	8.28	6.91	5.90	4.22	3.22	2.55	2.09	0
15	0.19	0.43	0.81	1.50	2.16	2.80	4.04	5.28	6.39	7.53	8.65	9.77	10.8	11.9	13.0	14.0	11.2	9.18	7.68	6.54	4.68	3.56	2.83	2.31	0
16	0.20	0.46	0.87	1.61	2.32	3.01	4.33	5.61	6.86	8.06	9.25	10.4	11.6	12.8	14.0	15.1	12.3	10.1	8.43	7.21	5.15	3.92	3.11	2.55	0
17	0.22	0.49	0.93	1.72	2.48	3.21	4.63	5.99	7.32	8.65	9.92	11.2	12.5	13.7	14.8	16.1	13.5	11.0	9.25	7.91	5.65	4.30	3.41	2.79	0
18	0.23	0.52	0.98	1.83	2.63	3.42	4.92	6.37	7.76	9.18	10.5	11.9	13.2	14.5	15.8	17.1	14.7	12.0	10.1	8.58	6.15	4.68	3.72	3.04	0
19	0.25	0.56	1.04	1.94	2.79	3.62	5.21	6.75	8.28	9.70	11.2	12.6	14.0	15.4	16.8	18.1	16.0	13.1	10.9	9.33	6.68	5.08	4.03	3.30	0
20	0.26	0.59	1.10	2.05	2.95	3.83	5.51	7.14	8.73	10.3	11.8	13.4	14.8	16.3	17.8	19.2	17.2	14.1	11.8	10.1	7.21	5.48	4.35	0	0
21	0.27	0.62	1.16	2.16	3.11	4.03	5.80	7.53	9.18	10.8	12.5	14.0	15.6	17.2	18.7	20.2	18.5	15.1	12.7	10.8	7.76	5.90	4.68	0	0
22	0.28	0.65	1.22	2.28	3.27	4.24	6.11	7.91	9.70	11.4	13.1	14.8	16.4	18.1	19.7	21.3	19.8	16.3	13.6	11.6	8.28	6.33	5.02	0	0
23	0.30	0.69	1.28	2.38	3.43	4.45	6.41	8.28	10.1	11.9	13.7	15.5	17.2	18.9	20.7	22.3	21.2	17.4	14.5	12.5	8.88	6.77	5.36	0	0
24	0.31	0.72	1.34	2.50	3.60	4.66	6.71	8.65	10.6	12.5	14.4	16.2	18.1	19.8	21.6	23.3	22.6	18.5	15.5	13.3	9.47	7.21	5.72	0	0
25	0.33	0.75	1.40	2.61	3.76	4.86	7.01	9.10	11.1	13.1	15.0	16.9	18.9	20.7	22.6	24.4	24.0	19.7	16.5	14.1	10.1	7.68	6.08	0	0
26	0.34	0.78	1.45	2.72	3.92	5.08	7.31	9.47	11.6	13.7	15.7	17.7	19.7	21.6	23.6	25.4	25.5	20.9	17.5	14.9	10.7	8.13	6.45	0	0
28	0.37	0.84	1.58	2.95	4.24	5.50	7.91	10.3	12.5	14.8	17.0	19.2	21.3	23.4	25.5	27.6	28.5	23.3	19.5	16.7	11.9	9.10	0	0	0
30	0.40	0.91	1.70	3.18	4.57	5.92	8.50	11.0	13.5	16.0	18.3	20.7	23.0	25.2	27.5	29.7	31.6	25.9	21.7	18.5	13.3	10.1	0	0	0
32	0.43	0.98	1.83	3.40	4.90	6.36	9.18	11.9	14.5	17.1	19.6	22.2	24.6	27.1	29.5	31.9	34.8	28.5	23.9	20.4	14.6	11.1	0	0	0
35	0.47	1.07	2.01	3.75	5.40	7.00	10.1	13.1	16.0	18.8	21.6	24.4	27.1	29.8	32.5	35.1	39.8	32.6	27.3	23.3	16.7	12.7	0	0	0
40	0.54	1.25	2.32	4.33	6.24	8.06	11.6	15.1	18.4	21.7	25.0	28.1	31.3	34.4	37.5	40.6	46.6	39.8	33.3	28.5	20.4	0	0	0	0
45	0.62	1.41	2.63	4.92	7.09	9.18	13.2	17.2	21.0	24.7	28.3	32.0	35.6	39.1	42.6	46.0	52.9	47.5	39.8	34.0	24.3	0	0	0	0
Lubrication Method	A					B						C													

Lubrication Method A: Drop Lubrication B: Oil Bath Lubrication C: Forced Circulation Lubrication by Pump Not applicable to selection of CHES-type chains. See P. 41 for CHEM Type.

CHE80 (Single Chain)

(kW)

Number of Small Sprocket Teeth	Rotary Speed of Small Sprockets min (r/min)																								
	10	25	50	100	150	200	300	400	500	600	700	800	900	1000	1100	1200	1400	1600	1800	2000	2200	2400	2700	3000	3400
9	0.25	0.58	1.08	2.02	2.91	3.77	5.43	7.03	8.58	10.1	11.6	13.1	12.7	10.8	9.40	8.21	6.53	5.35	4.48	3.83	3.32	2.91	2.44	2.08	1.73
10	0.28	0.65	1.22	2.26	3.26	4.22	6.09	7.91	9.62	11.3	13.1	14.7	14.8	12.7	11.0	9.62	7.68	6.27	5.25	4.48	3.89	3.41	2.86	2.44	2.02
11	0.31	0.72	1.34	2.51	3.61	4.68	6.74	8.73	10.7	12.6	14.5	16.3	17.2	14.6	12.7	11.1	8.80	7.23	6.06	5.17	4.48	3.93	3.30	2.81	2.27
12	0.35	0.79	1.48	2.75	3.97	5.14	7.41	9.62	11.7	13.8	15.9	17.9	19.5	16.6	14.5	12.7	10.1	8.21	6.90	5.89	5.11	4.48	3.76	3.21	0
13	0.38	0.87	1.61	3.01	4.33	5.61	8.06	10.4	12.8	15.1	17.3	19.5	21.7	18.8	16.3	14.3	11.3	9.33	7.76	6.65	5.76	5.06	4.24	3.62	0
14	0.41	0.93	1.75	3.25	4.69	6.07	8.73	11.3	13.9	16.3	18.7	21.2	23.5	21.0	18.2	16.0	12.7	10.4	8.73	7.43	6.44	5.65	4.74	4.04	0
15	0.44	1.01	1.88	3.51	5.05	6.54	9.40	12.2	14.9	17.6	20.2	22.8	25.4	23.3	20.2	17.8	14.1	11.5	9.62	8.21	7.14	6.27	5.25	4.48	0
16	0.47	1.08	2.01	3.76	5.42	7.02	10.1	13.1	16.0	18.9	21.6	24.5	27.2	25.7	22.2	19.5	15.5	12.7	10.6	9.10	7.83	6.90	5.79	4.94	0
17	0.51	1.16	2.15	4.01	5.78	7.46	10.8	14.0	17.1	20.1	23.1	26.1	29.0	28.1	24.4	21.4	16.9	13.9	11.6	9.92	8.58	7.53	6.33	5.41	0
18	0.54	1.22	2.29	4.27	6.15	7.98	11.5	14.8	18.2	21.4	24.6	27.8	30.9	30.7	26.6	23.3	18.5	15.1	12.7	10.8	9.40	8.21	6.90	5.89	0
19	0.57	1.30	2.42	4.53	6.52	8.43	12.2	15.7	19.2	22.7	26.1	29.4	32.7	33.2	28.8	25.3	20.1	16.4	13.7	11.7	10.1	8.95	7.46	6.39	0
20	0.60	1.37	2.57	4.78	6.89	8.95	12.8	16.6	20.4	24.0	27.6	31.1	34.5	35.9	31.1	27.3	21.6	17.8	14.8	12.7	11.0	9.62	8.06	0	0
21	0.63	1.45	2.70	5.04	7.27	9.40	13.6	17.5	21.5	25.3	29.1	32.7	36.5	38.6	33.4	29.4	23.3	19.1	16.0	13.7	11.9	10.4	8.73	0	0
22	0.67	1.52	2.84	5.30	7.61	9.92	14.2	18.5	22.6	26.6	30.6	34.5	38.3	41.4	35.9	31.5	25.0	20.4	17.2	14.6	12.7	11.1	9.33	0	0
23	0.70	1.60	2.98	5.57	7.98	10.4	15.0	19.4	23.7	27.9	32.1	36.2	40.2	44.2	38.3	33.6	26.7	21.9	18.4	15.7	13.6	11.9	10.0	0	0
24	0.73	1.67	3.13	5.83	8.43	10.9	15.7	20.3	24.8	29.2	33.6	37.9	42.1	46.3	40.9	35.9	28.5	23.3	19.5	16.6	14.5	12.7	10.6	0	0
25	0.77	1.75	3.26	6.09	8.80	11.3	16.3	21.2	25.9	30.9	35.1	39.5	44.0	48.4	43.4	38.1	30.3	24.6	20.7	17.8	15.4	13.5	11.3	0	0
26	0.80	1.83	3.40	6.36	9.18	11.9	17.1	22.2	27.0	31.9	36.6	41.3	45.9	50.4	46.1	40.4	32.1	26.3	22.0	18.8	16.3	14.3	12.0	0	0
28	0.87	1.98	3.69	6.89	9.92	12.8	18.5	23.9	29.3	34.5	39.7	44.7	49.8	54.7	51.5	45.2	35.9	29.4	24.6	21.0	18.2	16.0	0	0	0
30	0.93	2.13	3.98	7.42	10.7	13.8	19.9	25.8	31.6	37.2	42.7	48.2	53.6	58.9	57.1	50.1	39.8	32.5	27.3	23.3	20.2	17.8	0	0	0
32	1.00	2.28	4.26	7.98	11.4	14.8	21.3	27.7	33.9	39.9	45.8	51.6	57.4	63.1	62.9	55.2	43.8	35.9	30.1	25.7	22.2	19.5	0	0	0
35	1.10	2.51	4.69	8.73	12.6	16.3	23.6	30.5	37.3	43.9	50.4	56.9	63.3	69.6	72.0	63.2	50.1	41.0	34.4	29.4	25.4	0	0	0	0
40	1.28	2.90	5.42	10.1	14.5	18.9	27.2	35.2	43.0	50.7	58.3	65.7	73.9	80.6	87.3	76.8	61.3	50.1	42.0	35.9	14.9	0	0	0	0
45	1.45	3.30	6.15	11.5	16.6	21.4	30.9	40.0	48.9	57.6	66.2	74.6	82.8	91.0	99.2	91.8	73.1	59.8	50.1	40.3	0	0	0	0	0
Lubrication Method	A			B							C														

Lubrication Method A: Drop Lubrication B: Oil Bath Lubrication C: Forced Circulation Lubrication by Pump Not applicable to selection of CHES-type chains. See P. 41 for CHEM Type.



# Technical Data

## Designing of Chain Drive Mechanism 4

■ The table of transmission performance CHEM40 (1 line Chain) (kW)

Number of Small Sprocket Teeth	Rotary Speed of Small Sprockets (r/min)											
	10	25	50	100	200	300	400	500	700	900	1000	1200
9	0.05	0.11	0.21	0.39	0.71	1.04	1.34	1.68	2.22	2.77	3.08	3.59
10	0.05	0.13	0.24	0.44	0.79	1.15	1.49	1.87	2.47	3.08	3.42	
11	0.06	0.15	0.26	0.48	0.87	1.27	1.64	2.05	2.72	3.39	3.80	
12	0.06	0.16	0.29	0.52	0.95	1.38	1.79	2.24	2.96	3.73		
13	0.07	0.18	0.31	0.57	1.03	1.50	1.94	2.43	3.27	4.05		
14	0.08	0.19	0.33	0.61	1.13	1.64	2.13	2.64	3.53			
15	0.08	0.20	0.36	0.65	1.21	1.76	2.29	2.83	3.78			
16	0.09	0.22	0.38	0.70	1.29	1.88	2.44	3.02	4.03			
17	0.09	0.23	0.41	0.74	1.37	2.00	2.59	3.21				
18	0.10	0.24	0.43	0.80	1.45	2.11	2.74	3.40				
19	0.10	0.26	0.45	0.86	1.57	2.28	2.95	3.65				
20	0.11	0.27	0.48	0.91	1.66	2.40	3.11	3.85				
21	0.11	0.28	0.50	0.95	1.74	2.52	3.26	4.04				
22	0.12	0.30	0.53	1.00	1.82	2.66	3.45	4.23				
23	0.12	0.31	0.55	1.04	1.92	2.81	3.61	4.42				
24	0.13	0.32	0.60	1.11	2.03	2.96	3.84					
25	0.13	0.34	0.63	1.15	2.11	3.08	4.00					
26	0.14	0.35	0.65	1.20	2.19	3.20	4.16					
27	0.15	0.36	0.68	1.25	2.28	3.33	4.32					
28	0.15	0.38	0.70	1.29	2.36	3.45	4.48					
30	0.16	0.40	0.75	1.40	2.53	3.70						
32	0.17	0.43	0.80	1.51	2.80	4.05						
35	0.19	0.47	0.88	1.65	3.06	4.43						
40	0.22	0.54	1.00	1.88	3.50							
45	0.24	0.61	1.13	2.12	3.94							

■ The table of transmission performance CHEM50 (1 line Chain) (kW)

Number of Small Sprocket Teeth	Rotary Speed of Small Sprockets (r/min)											
	10	25	50	100	200	300	400	500	600	700	800	900
9	0.11	0.24	0.44	0.82	1.49	2.17	2.80	3.39	3.99	4.61	5.19	5.72
10	0.12	0.27	0.49	0.91	1.66	2.41	3.11	3.76	4.44	5.12	5.80	
11	0.14	0.29	0.54	1.00	1.83	2.65	3.42	4.14	4.88	5.63		
12	0.15	0.32	0.59	1.09	1.99	2.89	3.74	4.51	5.35	6.18		
13	0.16	0.35	0.64	1.18	2.16	3.14	4.07	4.91	5.80			
14	0.17	0.37	0.69	1.27	2.32	3.38	4.45	5.29	6.24			
15	0.19	0.40	0.74	1.36	2.49	3.62	4.76	5.67				
16	0.20	0.43	0.79	1.45	2.66	3.86	5.08	6.05				
17	0.21	0.45	0.84	1.54	2.82	4.10	5.40	6.43				
18	0.22	0.48	0.89	1.63	2.99	4.34	5.72					
19	0.24	0.51	0.97	1.79	3.31	4.81	6.21					
20	0.25	0.53	1.03	1.89	3.49	5.07	6.54					
21	0.26	0.56	1.08	1.98	3.66	5.32	6.86					
22	0.27	0.58	1.13	2.08	3.83	5.57						
23	0.29	0.61	1.18	2.17	4.01	5.83						
24	0.30	0.66	1.23	2.29	4.26	6.14						
25	0.31	0.68	1.28	2.38	4.44	6.39						
26	0.32	0.71	1.33	2.48	4.62	6.65						
27	0.34	0.74	1.38	2.57	4.80	6.90						
28	0.35	0.77	1.44	2.67	4.97	7.16						
30	0.37	0.82	1.54	2.86	5.33							
32	0.40	0.88	1.66	3.05	5.68							
35	0.44	0.97	1.81	3.34	6.22							
40	0.50	1.11	2.07	3.81	7.11							
45	0.56	1.24	2.33	4.29								

■ The table of transmission performance CHEM60 (1 line Chain) (kW)

Number of Small Sprocket Teeth	Rotary Speed of Small Sprockets (r/min)											
	10	25	50	100	150	200	250	300	400	500	600	700
9	0.18	0.41	0.76	1.41	2.02	2.63	3.22	3.78	4.91	6.00	7.06	8.14
10	0.21	0.46	0.85	1.57	2.24	2.93	3.58	4.20	5.45	6.66	7.92	
11	0.23	0.51	0.93	1.73	2.47	3.22	3.94	4.62	6.00	7.33		
12	0.25	0.55	1.02	1.89	2.69	3.51	4.34	5.04	6.54	8.07		
13	0.27	0.60	1.10	2.04	2.97	3.88	4.75	5.46	7.23			
14	0.29	0.64	1.21	2.24	3.23	4.22	5.16	6.12	7.86			
15	0.31	0.69	1.30	2.41	3.46	4.52	5.53	6.56	8.43			
16	0.33	0.73	1.38	2.57	3.69	4.82	5.90	6.99				
17	0.35	0.78	1.47	2.73	3.92	5.12	6.27	7.43				
18	0.37	0.83	1.56	2.89	4.16	5.42	6.64	7.87				
19	0.39	0.89	1.69	3.17	4.51	5.89	7.21	8.46				
20	0.41	0.94	1.78	3.33	4.75	6.20	7.59	8.91				
21	0.43	0.98	1.87	3.50	4.99	6.51	7.97					
22	0.45	1.03	1.96	3.67	5.23	6.82	8.35					
23	0.47	1.08	2.05	3.83	5.46	7.13	8.73					
24	0.49	1.16	2.14	4.04	5.81	7.58	9.11					
25	0.51	1.21	2.23	4.20	6.05	7.90	9.67					
26	0.53	1.25	2.32	4.37	6.29	8.22						
28	0.58	1.35	2.49	4.71	6.78	8.85						
30	0.62	1.45	2.67	5.05	7.26	9.48						
32	0.66	1.56	2.93	5.53	7.96							
35	0.72	1.70	3.21	6.05	8.71							
40	0.82	1.95	3.66	6.92	9.95							
45	0.92	2.19	4.12	7.78								




## Installation Way

### (A) Arrangement of Shafts

#### Horizontal Arrangement

Even when the shafts are arranged horizontally, the following points should be taken into account in terms of the rotary direction of the shafts. In (2) and (3) shown, elongation of the chain may prevent the chain links from leaving the sprocket teeth smoothly, resulting in biting. In (3) shown, the load bottom and slack top sides of the chain may come into contact with each other; to prevent this, use an idler or something equivalent.


#### Horizontal Arrangement

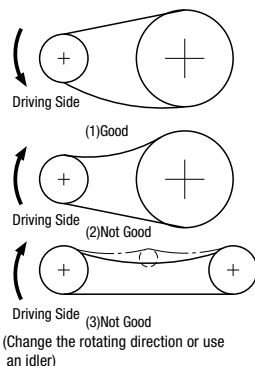

#### Vertical Arrangement

In (5) shown, an elongated chain may sag below the bottom sprockets. In this case, when a small sprocket is arranged below a large sprocket, the elongated chain may drop away from the small sprocket. To prevent this, the shafts should be arranged as in (4), maintaining the angle at a maximum of 60°. When the mechanism in question or the installation space requires a vertical arrangement, place the small sprocket above the large sprocket and use an idler, etc. on the outside or inside as shown in (6).


#### Vertical Arrangement

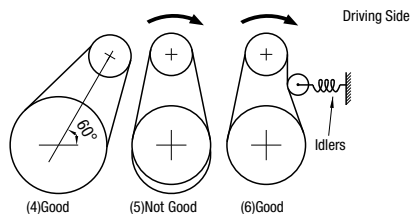

### (B) Deflection


The deflection should normally be maintained at approximately 4% of the distance between the shafts, and approximately 2% in the following instances.

- A. The shafts are arranged almost vertical transmission.
- B. The distance between the shafts is 1 m or more.
- C. The chain needs to be started and stopped frequently under heavy load.
- D. The chain needs to be run in the reverse direction.



### (C) Load Fluctuation

When the load varies during operation, install an initial tension either on the load or loose side of the chain. This can remove vibration and reduce the noise of the chain.

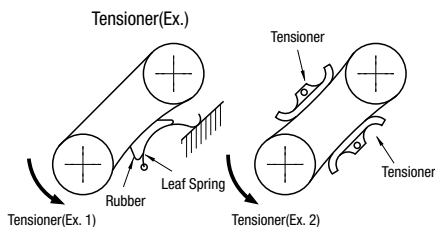

## Lubrication

The service life of roller chains depends heavily on lubrication. Therefore, correct lubrication is extremely important. Today, as chains are increasingly run at higher speeds, they need to be lubricated more efficiently.

### Benefits of Lubrication Oil

Oil applied into the space between pins, bushings and rollers forms oil film. Which then helps reduce wear of parts as well as absorb impact. Oil also cools down heat generated in the chain. Use good quality mineral oil to lubricate roller chains.

### Recommended Lubricating Oil

Lubrication Method	A, B				C			
	-10 0	0 40	40 50	50 60	-10 0	0 40	40 50	50 60
Chain No.								
CHE25~50	SAE10	SAE20	SAE30	SAE40	SAE10	SAE20	SAE30	SAE40
CHE60~80	SAE20	SAE30	SAE40	SAE50				

### The lubrication methods

(mentioned in the power transmission efficiency tables are based on the followings.)

Lubrication	Method	Service Interval and Oiling Quantity	Notes
A	Hand Oiling 	Apply oil by hand using a hand oiler or a brush, normally at least once everyday.	While slowly turning the chain, apply oil evenly 3~4 times onto the entire length of the chain. Be careful not to allow hands or clothing to be caught between the chain and the sprocket. When the mechanism is run for the first time after oiling, be careful to excess oil splashing over.
	Drop Lubrication 	Oil the chain in a manner such that approximately 5~20 drops of oil are applied onto the chain per minute.	It is recommended that a simple casing be installed over the chain to prevent oil from splashing over.
B	Oil Bath Lubrication 	Dip the bottom of the chain approximately 10 mm below the oiled surface.	Use a leak-free oil container. Before installing the oil container, wash it carefully to remove dust, dirt and other foreign particles. Maintain the correct oil level. Do not overfill the container.
	Rotating Plate Lubrication 	The chain is oiled by a rotating plate. Dip the plate approximately 20mm below the oil level. The wind velocity of the plate should be 200 m/min or faster.	
C	Forced Circulation Lubrication by Pump 	It is necessary to adjust the oil quantity appropriately to prevent overheating.	Use a leak-free oil container. Before installing the oil container, wash it carefully to remove dust, dirt and other foreign particles.



# Technical Data

## Free Flow Chain / Table Top Chain Selection

### ■ Selection Procedure for Free Flow Conveyor Chains

#### [Step 1] Confirm Usage Condition

Confirm that the following conditions are true.

Temp.: -10°C ~ +80°C

Chain Velocity: 5~15m/min

Conveyor Length: 15m or less

Environment: No abrasive dusts, corrosive gasses, or high humidity

#### [Step 2] Finalize Chain Selection

Calculate Transferred Item Mass per 1m, and select a chain satisfying the Allowable Load Mass from the table below.


$$WA(kg/m) = (W_1 + W_2) / P_L$$

WA: Transferred Item Mass per 1m (kgf)  
 W<sub>1</sub>: Workpiece Mass (kgf)  
 W<sub>2</sub>: Pallet Mass (kgf)  
 P<sub>L</sub>: Pallet Move Distance (m)

Table 1. Allowable Load Mass

Chain	Allowable Load Mass (kgf/m)
WCHE3	30
WCHE4	55
WCHE5	55

#### [Step 3] Confirm Allowable Tension



$$T = G/1000 \times (Hw + Cw)L_1 \cdot fc + Aw \cdot L_2 \cdot fa + (Aw + Cw)L_2 \cdot fr + 1.1Cw(L_1 + L_2) \cdot fc$$

T: Max. Tension Applied on Chain (kN)

L<sub>1</sub>: Transfer Section Length (m)

L<sub>2</sub>: Accumulation Section Length (m)

Hw: Transfer Section Transferred Mass including pallets (kg/m)

Aw: Accumulation Section Transferred Mass including pallets (kg/m)

Cw: Chain Weight (kg/m)

fa: Friction Coefficient of Transferred Item and Chain During Accumulation

fc: Friction Coefficient of Chain and Rail

fr: Friction Coefficient of Chain and Rail During Accumulation

G: Gravitational Acceleration=9.80665 (m/s<sup>2</sup>)

Table 2. Friction Coefficient of Free Flow Conveyor Chains

Chain	Friction Coefficient
fa	0.10
fc	0.08
fr	0.20

(T) Max. Tension Applied on Chain is multiplied with (Table 3. K<sub>1</sub>) Velocity Factor and (Table 4. K<sub>2</sub>) Transferred Item Load Factor.

Tension per single chain is calculated (Two chains typically used for free-flow conveyors).

Allowable Chain Tension ≥ (T × K<sub>1</sub> × K<sub>2</sub>) / 2

If the calculated result exceeds the allowable tension of selected chain, re-select a chain one size larger or re-calculate with conveyor length divided into shorter sections.

Table 3. Velocity Factor Table

Chain Velocity m/min.	Factor K <sub>1</sub>
1~4 or less	1.0
Over 4, 8 or less	1.1
Over 8, 10 or less	1.2
Over 10, 14 or less	1.5
Over 14, 18 or less	1.6

Table 4. Transferred Item Load Factor

Average Transferred Item Weight Wa (kg/m)	Factor K <sub>2</sub>
30 or Less	1.00
31~40	1.10
41~50	1.15
51~70	1.20
71~90	1.25
91~120	1.35

Table 5. Max. Allowable Tension for Free Flow Conveyor Chains

Chain Velocity m/min.	Allowable Tension (kN)
WCHE3	0.55
WCHE4	0.88
WCHE5	1.37

### ■ Selection Procedure for Table Top Conveyor Chains

#### [Step 1] Calculate Effective Tension (Fe)

$$Fe = g \cdot (m \cdot Lc \cdot \mu R + (m + M) \cdot (Lc - A) \cdot \mu R + MA \cdot A \cdot (\mu c + \mu R) + m \cdot A \cdot \mu R)$$

Fe: Effective Tension (N)

Lc: Conveyor Length (m)

A: Accumulation Span Length (m)

\* A=0 when there is no Accumulation.

M: Mass of Transferred Item

MA: Mass of Transferred Item for Accumulation Section

m: Chain Mass (kg/m)

μc: Dynamic Friction Coefficient of Chain and Transferred Item

μR: Dynamic Friction Coefficient of Chain and Rail

g: Gravitational Acceleration=9.80665 (m/sec<sup>2</sup>)

Table 1. Friction Coefficient

Lubrication Method	Material of Transferred Item				
	Steel	Aluminum	Glass	Paper	Plastic
Dry	0.25	0.2	0.15	0.3	0.2
Soap Water	0.15	0.12	0.1	—	0.15

Lubrication Method	Guide Rail Material			
	Steel	Stainless	UHMW	Nylon
Dry	0.2	0.2	0.15	0.2
Soap Water	0.12	0.12	0.1	0.14

\*The Friction Coefficients above are estimated values with safety ratio added, for use as tension calculation components.

#### [Step 2] Calculate Post-adjusted Tension based on conditions

$$Fs = Fe \cdot Cs$$

Fs: Post-adjusted Tension (N)

Cs: Load Correction Factor

For frequent starts and stops	=1.2
For wear intensive applications	=1.2
For multiple row use	=1.25
For other than above	=1.0

#### [Step 3] Calculate Chain Allowable Tension

$$Fadm = FN \cdot Va \cdot Ta$$

FN: Max. Allowable Tension (N)

Ta: Temperature Factor

$$Fadm = Allowable Tension (N)$$

Va: Velocity Factor

Table 2. Maximum Allowable Tension

Type	Nomial	Max. Allowable Tension (N)
TPCH	826 1143	1650

Table 3. Velocity Factor





Table 4. Temperature Factor



#### [Step 4] Compare Allowable Tension and Post-adjusted Tension

If Fs ≤ Fadm, the selection is applicable.

#### [Step 5] Calculating Required Power

$$P = Fs \cdot V / (60 \cdot \eta)$$

V: Chain Velocity (m/min)

P: Required Power (W)

η: Transmission Efficiency





# Technical Data

## Selection of Flat Belts

### Allowable Stress for Tension Member

Check the belt that is selected for allowable stress, using the following procedures.

#### 1. Calculating the Effective Tension

$$\text{Formula 1 } F = f(W_0 + W_1 + W_2)L + f(W_1 + W_3)L \pm W_0 \cdot H$$

(Carrier Side)   (Return Side)   (Vertical Side)

F: Effective Tension

f: Rolling friction coefficient of rollers, or friction coefficient between belt and supports

(Select from Table 1.)

$W_0$ : Weight of Carried Materials per Meter of Belt kg/m

$W_1$ : Weight of belt per Meter kg/m

$W_2$ : Carrier Roller Weight per 1m kg/m

(Select from Table 2.)

$W_3$ : Return Roller Weight per 1m kg/m

(Select from Table 2.)

L: Conveyor Horizontal Length m

H: Vertical Height (+Up angle, -Down angle) m

Table 1. Table of f Values

Belt Surface in Contact with Supports	Smooth	Cloth Surfaced
Roller Support	0.05	0.05
Roller+Steel Plate Support	0.2	0.3
Steel Supported (SUS-SS)	0.4	0.5
Plywood Support	0.5	0.6

(When knife edges are used, add 0.2 to the above values in Table 1.)

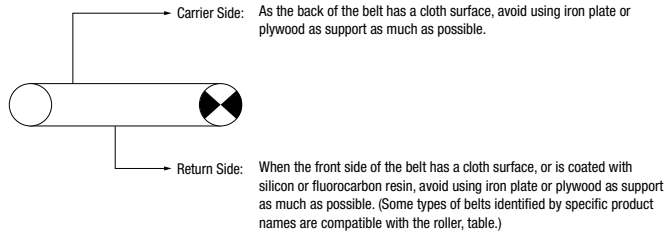


Table 2. Table of Roller Weight

Roller Dia. (mm)	Single Roller (kg/roller)	Allowable Load (kg/roller)
28.6	0.2	50

Table 2. shows the weight of the revolving parts of a roller that meets (JISB8805-1965). For accurate calculation, check the actual weight of the roller being used.

#### 2. Power Requirement

P: Power Requirement kW  
 F: Effective Tension N  
 V: Belt Speed m/min  
 60000: 60×10<sup>2</sup> (Constant)

$$\text{Formula 2 } P = \frac{F \cdot V}{60000}$$

#### 3. Motor Power

Pm: Motor Power kW  
 P: Power Requirement kW  
 $\eta$ : Mechanical Efficiency  
 (Standard Mechanical Efficiency Range: 0.5~0.65)

$$\text{Formula 3 } P_m = \frac{P}{\eta}$$

For efficient operation, it is recommended to check the motor property if the motor for use has a power rating less than 0.1kW.

#### 4. Using the Tension on the Loose Side to Calculate Maximum Tension

$$\text{Formula 4 } F_{M1} = F \cdot K$$

$F_{M1}$ : Maximum Tension N  
 F: Effective Tension N  
 K: Coefficient

Using Value  $\mu$  selected from Table-3 and the wrap angle ( $\theta$ ), select value K from Table 4. (When the wrap angle ( $\theta$ ) is not listed in Table 4, Calculate from)

$$K = \frac{e^{\mu\theta'}}{e^{\mu\theta'} - 1}$$

$\mu$ : Friction coefficient between driving pulley and belt (Select from Table 3.)

e: Base of Natural Logarithm (2.718)

$\theta'$ : Radian

$$(\theta' = \theta \times \frac{2\pi}{360})$$

Table 3. List of  $\mu$  values

Pulley Surface	Surface Shape in Contact with Pulley		Smooth	Cloth Surfaced
	Dry	Wet		
Bare Steel Pulley	Dry	0.2	0.3	
	Wet	0.15	0.2	
Rubber Ranking Pulley	Dry	0.3	0.35	
	Wet	0.2	0.25	

Table 4. Table of Value K Based on Wrap Angle ( $\theta$ )

$\theta^\circ \backslash \mu$	0.1	0.15	0.2	0.25	0.3	0.35	0.5
180	3.8	2.7	2.2	1.9	1.7	1.5	1.3
190	3.6	2.6	2.1	1.8	1.6	1.5	1.3
200	3.4	2.5	2.0	1.8	1.6	1.5	1.3
210	3.3	2.4	2.0	1.7	1.5	1.4	1.2
220	3.2	2.3	1.9	1.7	1.5	1.4	1.2
230	3.1	2.3	1.9	1.6	1.4	1.4	1.2

#### 5. Using Pretension to Calculate Maximum Tension

$$\text{Formula 5 } F_{M2} = F + B \cdot T_C$$

$F_{M2}$ : Maximum Tension N  
 B: Belt Width cm  
 $T_C$ : Initial Tension N/cm  
 (Select from Table 5.)

Table 5. Table of  $T_C$  Values

No. of Tension Members (No. of Plys)	1 Pc.
Initial Tension (N/cm)	1.5

Compare  $F_{M1}$  (Formula 4) and  $F_{M2}$  (Formula 5), and Make the larger as the Max. Tension  $F_M$ .

#### 6. Allowable Stress

$$\text{Formula 6 } C \geq \frac{F_M}{B}$$

C: Allowable Stress for Belt N/cm  
 $F_M$ : Effective Tension kg  
 B: Belt Width cm

When the allowable stress for the belt being used is equal to or higher than the maximum tension per 1cm width of the belt as expressed by Formula 6 above, the belt is suitable for use.



# Technical Data

## Selection of Timing Belts 1

### [Step 1] Setting the Required Design Conditions

- (1) Machine Type                      (2) Power Transmission                      (3) Load Variances                      (4) Operation Duration per Day                      (5) Small Pulley Rotational Speed
- (6) Rotation Ratio (Lg. Pulley # of Teeth / Small Pulley # of Teeth)                      (7) Shaft Center Distance (Interim)                      (8) Pulley Diameter Limitation                      (9) Other Usage Conditions

### [Step 2a] Calculating Design Power.....MXL/XL/L/H/S\_M/MTS\_M/T Series

- Design Power (Pd) =Transmission Power (Pt) x Overload Factor (Ks)
- Calculate Transmission Power at Motor Rated Power Output. (Ideally should be calculated with the load applied to the belt)
- Overload Factor (Ks)=Ko+Kr+Ki      Overload Factor (Ks)=Lo+Kr+Ki      Ko: Overload Correction Factor (Table 1.)      Kr: Rotation Ratio Correction Factor (Table 2.)      Ki: Idler Correction Factor (Table 3.)

**Table 1. Load Correction Factor (Ko)**

Typical Machines Using a Belt	Motor					
	Max. Output not Exceeding 300% of Rated Value			Max. Output Exceeding 300% of Rated Value		
	AC Motor (Standard Motor, Synchronous Motor) DC Motor (Shunt), Engine with 2 or More Cylinders			Special Motor (High torque), Single-Cylinder Engine DC Motor (Series), Operation with Lye Shaft or Clutch		
	Operation Hours			Operation Hours		
	Intermittent use 1 Day 3 to 5 hrs	Regular Use 1 Day 8 to 12 hrs	Continuous Use 1 Day 8 to 12 hrs	Intermittent use 1 Day 3 to 5 hrs	Regular Use 1 Day 8 to 12 hrs	Continuous Use 1 Day 8 to 12 hrs
Exhibit Instrument, Projector, Measuring Instrument, Medical Machine	1.0	1.2	1.4	1.2	1.4	1.6
Cleaner, Sewing Machine, Office Machine, Carpentry Lathe, Belt Sawing Machine	1.2	1.4	1.6	1.4	1.6	1.8
Light Load Belt Conveyor, Packer, Sifter	1.3	1.5	1.7	1.5	1.7	1.9
Liquid Mixer, Drill Press, Lathe, Screw Machine, (Circular Sawing) Machine, Planer, Washing Machine, Paper Manufacturing Machine (Excluding Pulp Manufacturing Machine), Printing Machine	1.4	1.6	1.8	1.6	1.8	2.0
Mixer (Cement and Viscous Matter), Belt Conveyor (Ore, Coal and Sand), Grinder, Shaping Machine, Boring Machine, Milling Machine, Compressor (Centrifugal), Vibration Sifter, Textile Machine (Warper and Winder), Rotary Compressor, Compressor (Reciprocal)	1.5	1.7	1.9	1.7	1.9	2.1
Conveyor (Apron, Pan, Bucket and Elevator), Extraction, Fan, Blower (Centrifugal, Suction and Discharge), Power Generator, Exciter, Hoist, Elevator, Rubber Processor (Calendar, Roll and Extruder), Textile Machine (Weaving Machine, Fine Spinning Machine, Twisting Machine and Weft Winding Machine)	1.6	1.8	2.0	1.8	2.0	2.2
Centrifugal Separator, Conveyor (Flight and Screw), Hammer Mill, Paper Manufacturing Machine (Pulpapitor)	1.7	1.9	2.1	1.9	2.1	2.3

- Typical machines using a belt are listed above. For other machines using a belt, a load correction coefficient should be fixed by reference to this table.
- In the case of starts and stops over 100 times per day or rapid acceleration and deceleration, check the above values multiplied by 1.3. (MTS\_M only)

**Table 2. Speed Ratio Correction Coefficient (Kr)**

Speed Ratio	Coefficient (Kr)
1.00 to 1.25	0
1.25 to 1.75	0.1
1.75 to 2.50	0.2
2.50 to 3.50	0.3
3.50 or more	0.4

**Table 3. Idlers Correction Coefficient (Ki)**

Position of Idler	Coefficient (Ki)
Inside the loose side of the belt	0
Outside the loose side of the belt	0.1
Inside the tight side of the belt	0.1
Outside the tight side of the belt	0.2

### [Step 2b] Calculating Design Power .....For P\_M/UP\_M Series

- Design Power (Pd) =Transmission Power (Pt) x Overload Factor (Ks)
- Calculate Transmission Power at Motor Rated Power Output. (Ideally should be calculated with the load applied to the belt)
- Normal Motor Load Factor (Ks)=Ko+Ki+Kr+Kh      Ko: Application Coefficient (Table 4.)      Ki: Idler Correction Factor (Table 5.)      Kr: Speed Multiplication Correction Factor (Table 6.)      Kh: Operation Time Correction Factor (Table 7.)

**Table 4. Application Coefficient (Ko)**

Type of Passive Unit	Type of Motor Peak Output/ Basic Output	I	II	III	
		200% or Less	200 to 300	300% or More	
A	Extremely Smooth Transmission	1.0	1.2	1.4	
B	Fairly Smooth Transmission	1.3	1.5	1.7	
C	Transmission with Moderate Impact	1.6	1.8	2.0	
D	Transmission with Considerable Impact	1.8	2.0	2.2	
E	Transmission with Large Impact	2.0	2.2	2.5	
Motor	Single-Phase	—	—	All Types	
	AC Motor	2 Poles	100kW or More	90~3.7kW	2.2kW or Less
		4 Poles	55kW or More	45kW or Less	—
		6 Poles	37kW or More	30kW or Less	—
		8 Poles	15kW or More	11kW or Less	—
	Wire-Wound	4 Poles	—	15kW or Less	11kW or Less
		6 Poles	—	11kW or Less	7.5kW or Less
		8 Poles	—	5.5kW or Less	3.7kW or Less
			—	—	—
	Synchronous Motor	—	Average Torque	High Torque	
DC Motor	Shunt	Compound	Series		
Internal Combustion Engine	8 or More Cylinders	7~5 Cylinders	4~2 Cylinders		
Hydraulic Motor	—	—	All Types		

Note: When the transmission involves regular, reverse revolutions, large momentum or extreme impact, a basic-use coefficient of 2.5 or more can be used.

**Table 5. Correction Coefficient when Idler is Used (Ki)**

Location of Idler in Use	Inside	Outside
Loose Side of the Belt	0	+0.1
Tense Side of the Belt	+0.1	+0.2

Should be added for each idler.

**Table 6. Speed Increase Correction Coefficient (Kr)**

Speed Increase Ratio	Correction Coefficient
1 to 1.25	0
1.25 to 1.75	+0.1
1.75 to 2.5	+0.2
2.5 to 3.5	+0.3
3.5 or more	+0.4

**Table 7. Operating Correction Coefficient (Kh)**

Operation Hours	Correction Coefficient
Operated 10 or More Hours a Day	+0.1
Operated 20 or More Hours a Day	+0.2
Operated 500 Hours or Less (For Seasonal Operation)	-0.2

Selection is easy with Timing Pulleys and Belts automatic calculation tool available at:

[http://fawos.misumi.jp/FA\\_WEB/pulley\\_us/](http://fawos.misumi.jp/FA_WEB/pulley_us/)

[Step 2c] Calculating the Design Power.....2GT/3GT Series

- Design Power (Pd) = Transmission Power (Pt) × Overload Coefficient (Ks)
- Calculate the Transmission Power (Pt) in terms of the rated power of the prime motor. (Originally, it is ideal to calculate from the actual load applied to the belt)

A: Normal Motor Load Factor (Ks)=Ko+Ki+Kr+Kh

Ko: Load Correction Factor (Table 8) Ki: Idler Correction Factor (Table 9) Kr: Speed Multiplication Correction Factor (Table 10) Kh: Operation Time Correction Factor (Table 11)

B: Servo Motor Kp, other table\*

Table 8. Load Correction Factor (Ko)

Type of Motor		I	II	III	
Peak Output/Basic Output		150% or Less	Over 150%~200% or Less	Over 250%	
AC Motor	Single-Phase	—	—	All Types	
	Squirrel Cage Type	2 Phase	—	All Types	
		4 Phase	—	37Kw or More	30Kw or Less
		6 Phase - 8 Phase	—	—	All Types
	Wound Field Type	4 Phase	—	—	15Kw or Less
		6 Phase	—	—	11Kw or Less
8 Phase		—	—	5.5Kw or Less	
Synchronous Motor	—	Standard Torque Type	High Torque Type		
DC Motor	Shunt	Wound Field	Series		
Hydraulic Motor	—	—	All Types		
Office Machinery	Printer · Fax Machine · Copy Machine	—	1.2	1.4	
Home Appliance	Juicer	—	1.4	1.6	
	Vacuum Cleaner	1.0	1.2	1.4	
Finance Equipment	Money Exchanger · Ticket Machine · Ticket Gates · Bank Teller Machine	1.3	1.4	1.5	
Food · Medicine · Medical Equipment	Bakery Equipment	1.2	1.4	1.6	
	Mixer · Granulator	1.4	1.6	1.8	
	Centrifuge	1.5	1.7	1.9	
	Medical Machinery · Measurement Equipment	1.0	1.2	1.4	
Machine Tool	Drill Press · Lathe	1.2	1.4	1.6	
	Milling Machine	1.3	1.5	1.7	
	Wood Lathe	1.2	1.4	1.6	
Printing Book Making	Printer · Book Making Machine · Cutter	1.2	1.4	1.6	
Textile Machine	Textile · Knitting Machinery	1.3	1.5	1.7	
Sawing Machine	Sawing Machine – Home Use	—	1.2	1.4	
	Sawing Machine – Industrial	—	1.6	1.8	
Belt Conveyor · Packaging Machine	Belt Conveyor – Light Objects	1.1	1.3	1.5	
	Packaging Machine	1.2	1.4	1.6	
Film · Wire Making Machine	Calender · Extruder	1.4	1.6	1.8	
	Wire Making Machinery	1.4	1.6	1.8	

Table 9. Idler Correction Factor (Ki)

Idler Position	Inside	Outside
Loose Side of the Belt	0	+0.1
Tense Side of the Belt	+0.1	+0.2

Table 10. Speed Multiplication Correction Factor (Kr)

Speed Increase Ratio	Correction Factor
1 or More Less than 1.25	0
1.25 or More Less than 1.75	+0.1
1.75 or More Less than 2.5	+0.2
2.5 or More Less than 3.5	+0.3
3.5 or More	+0.4

Table 11. Operation Time Correction Factor (Kh)

Operation Time	Correction Factor
Less than 10 hours (Everyday)	0
10~16 Hours Continuous (Everyday)	+0.2
16~24 Hours Continuous (Everyday)	+0.4
300 Hours/Year or Less (Seasonal operations etc.)	-0.2

Table 12. Special Motor Correction Factor (Kp)

Motor Type	Load Correction Factor
Servo Motor	Design as Kp=2.5 for Rated Output, and Kp=0.5 for Peak Output (Rational speed as applied speed)
Spindle Motor	Design as Kp=2.2 for Rated Output and Base Rotational Speed

[Step 2-d] Calculating Designed Power ..... For EV5GT/EV8YU Series

- Design Power (Pd) = Transmission Power (Pt) × Overload Factor (Ks)
- Calculate Transmission Power at Motor Rated Power Output. (Ideally should be calculated with the load applied to the belt)
- Overload Factor (Ks)=Ko+Ki+Kr+Kh+Km

Ko: Load Correction Factor (Table 13) Ki: Idler Correction Factor (Table 14) Kr: Speed Multiplication Correction Factor (Table 15) Kh: Operation Time Correction Factor (Table 16) Km: Start/Stop Correction Factor (Table 17)

Table 13. Load Correction Factor (Ko)

Prime Motor Type		Induction Motor	Spindle Motor	Servo Motor (Peak Output/Rated Output)		
				200% or Less	201~299%	300% or More
Robot	Scara Type	2.0	2.0	1.6	1.7	1.8
Injection Mold Machine	Mold Fastening · Ball Screw Drive	1.8	1.8	1.3	1.4	1.5
Machine Tool	Lathe · Drill Press	1.6	1.3	1.2	1.3	1.4
Machine Tool	Milling Machine	1.7	1.3	1.2	1.3	1.4
Conveyor		1.8	1.8	1.4	1.5	1.6
Medical Machinery · Measurement Equipment		1.5	1.5	1.1	0.1	0.2
Packaging Machine		1.6	1.5	1.1	0.1	0.2
Agitator · Mixer	Liquid	1.6	1.6	1.2	1.3	1.4
	Viscous Material	1.7	1.7	1.3	1.4	1.5
Drilling Machine · Granulator		1.8	1.8	1.4	1.5	1.6
Centrifuge		1.9	1.9	1.5	1.6	1.7
Mills	Ball · Rods	2.2	2.2	1.7	1.8	1.9
Printing Machine · Book Making Machine		2.0	2.0	1.6	1.7	1.8
Paper Making Machine	Calender · Dryer	2.0	2.0	1.6	1.7	1.8
Textile Machine		2.0	2.0	1.6	1.7	1.8
Wire Related	Wire Drawing & Twisting Machine	2.1	2.0	1.6	0.1	0.2
Woodworking Machine		1.7	1.7	1.2	1.3	1.4
Pump		2.0	2.0	1.6	1.7	1.8
Compressor	Reciprocating · Rotating	2.0	2.0	1.6	1.7	1.8
Fan · Blower	Axial Flow · Roots	2.0	1.8	1.3	1.4	1.5
Generator · Exciter		1.8	1.8	1.4	1.5	1.6
Rubber Industry Machinery · Lumber Mill Machinery		2.0	2.0	1.6	1.7	1.8

Table 14. Idler Correction Factor (Ki)

No Idler	0
Inside Idler	0.1 × (Qty-1)
Outside Idler	0.1 × (Qty-1)

Table 15. Speed Multiplication Correction Factor (Kr)

Operation Duration (Hours/Day)	Correction Factor
1 or More Less than 1.25	0
1.25 or More Less than 1.75	0.1
1.75 or More Less than 2.5	0.2
2.5 or More Less than 3.5	0.3
3.5 or More	0.4

Table 16. Operation Time Correction Factor (Kh)

Operation Duration (Hours/Day)	Correction Factor
≤8	0.1
8<16	0.2
16≤	0.3

Table 17. Start/Stop Correction Factor (Km)

Start/Stop Frequency (Times/Day)	Correction Factor
≤10	0.1
11<100	0.2
101<500	0.3
501<	0.4



# Technical Data

## Selection of Timing Belts 2

[Step 3] Temporarily Selecting the Type of Belt from Selection Guide Table

Table 18. Selection Guide Table 1 (MXL, XL, L, H, T5, T10)

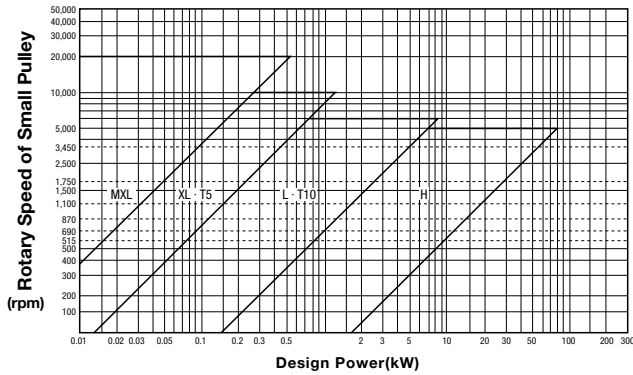


Table 19. Selection Guide Table 2 (S\_M series)

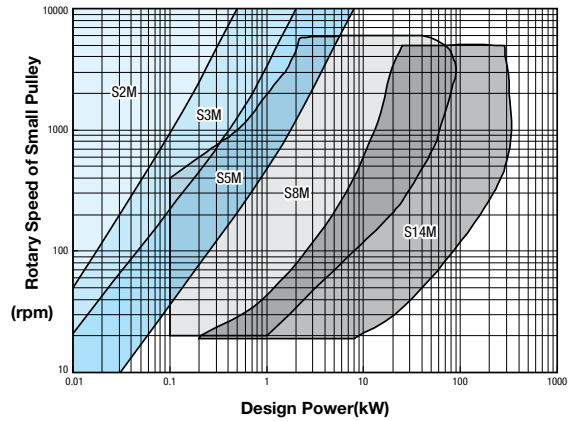


Table 20. Selection Guide Table 3 (P\_M series)

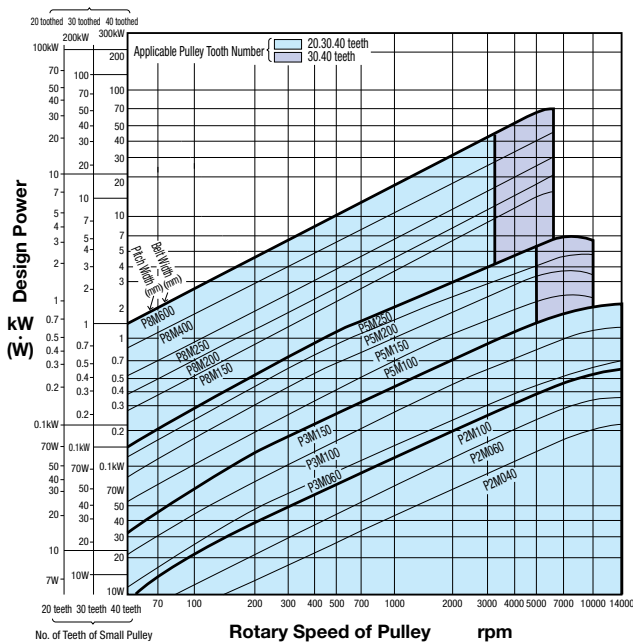


Table 21. Selection Guide Table 4 (MTS8M)

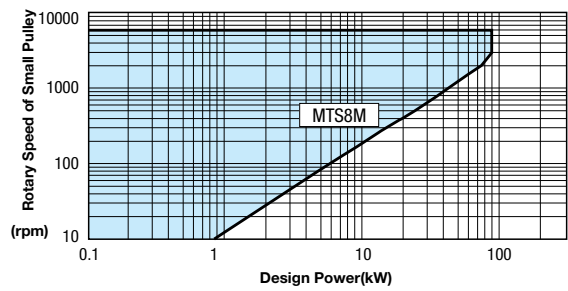


Table 22. Selection Guide Table 5 (UP\_M series)

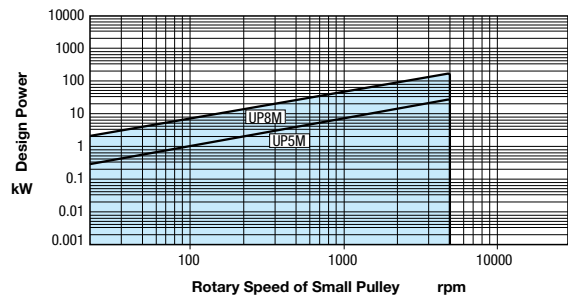


Table 23. Selection Guide Table (2GT-3GT series)


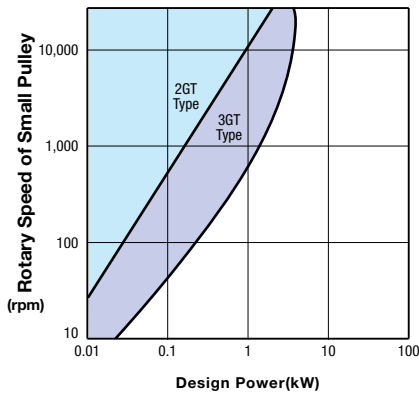


Table 24. Selection Guide Table (EV5GT-EV8YU series)



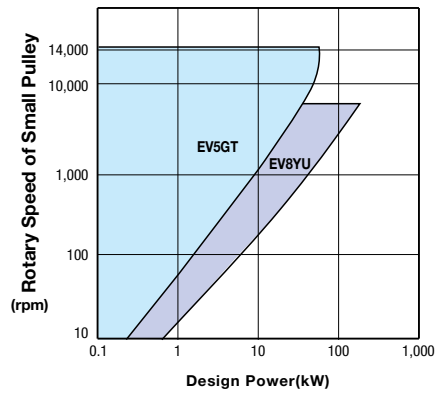

**Selection is easy with Timing Pulleys and Belts automatic calculation tool available at:**  
[http://fawos.misumi.jp/FA\\_WEB/pulley\\_us/](http://fawos.misumi.jp/FA_WEB/pulley_us/)

**[Step 4] Determining Number of Teeth of Large and Small Pulley, Belt Length, Inter-Shaft Distance**

(1) Select the number of teeth of large and small pulley from **P. 248–258**, which can satisfy the predetermined speed ratio.  
(However, note that the number of teeth for small pulley should be larger than the min. number of teeth shown in Table 25.)

$$\text{Speed Ratio} = \frac{\text{Number of Teeth of Large Pulley}}{\text{Number of Teeth of Small Pulley}}$$

**Table 25. Min. Number of Teeth of Pulley**

Rotary Speed of Small Pulley (rpm)	Type of Belt, Minimum Number of Teeth											
	MXL	XL	L	H	S2M	S3M	S5M	S8M	S14M	MTS8M	T5	T10
900 or Less	12	10	12	14	14	14	14	22	—	24	12	14
Over 900 1200 or Less	12	10	12	16	14	14	16	24	34	24	12	16
Over 1200 1800 or Less	14	11	14	18	16	16	20	26	38	24	14	18
Over 1800 3600 or Less	16	12	16	20	18	18	24	28	40	24	16	20
Over 3600 4800 or Less	—	16	20	24	20	20	26	30	48	24	20	22
Over 4800 10000 or Less	—	—	—	—	20	20	26	—	—	—	—	—

(2) Determine approx. belt circum. length (Lp') in terms of temporary inter-shaft distance (C'), diameter of large pulley (Dp) and diameter of small pulley (dp).

$$Lp' = 2C' + \frac{\pi(Dp+dp)}{2} + \frac{(Dp-dp)^2}{4C'}$$

C' : Temporary Inter-shaft Distance  
Dp : Pitch Diameter of Large Pulley (mm)  
dp : Pitch Diameter of Small Pulley (mm)  
Lp' : Approx. Belt Circum. Length (mm)

(3) Determine a belt circum. length (Lp') that is the nearest value to approx. belt circum. length referring to (select from actual product on the web), and then calculate the correct inter-shaft distance using the following formula.

$$C = \frac{b + \sqrt{b^2 - 8(Dp-dp)^2}}{8}$$

b = 2Lp - π(Dp+dp)  
Dp : Pitch Diameter of Large Pulley (mm)  
dp : Pitch Diameter of Small Pulley (mm)  
C : Inter-shaft Distance  
Lp : Belt Circum. Length (mm)

**[Step 5] Determining Belt Width**

(1) Calculate an approx. belt width using the following formula, and then select a belt width (Bw':mm) that is the nearest value to the approximated value.

$$Bw' = \frac{Pd}{Ps \cdot Km} \times Wp$$

Pd: Design Power  
Ps: Reference Transmission Capacity ..... Use the Reference Transmission Capacity Table on **P. 248–258**.  
Km: Engagement Correction Coefficient (Table 26)  
Wp: Reference Belt Width (Table 27.)

**Table 26. Engagement Correction Coefficient (Km)**

No. of Teeth Engaged Zm	More than 6	5	4	3	2
Km	1.0	0.8	0.6	0.4	0.2

$$\text{No. of Teeth Engaged (Zm)} = \frac{Zd \cdot \theta}{360^\circ}$$

$$\theta = 180^\circ - \frac{57.3(Dp-dp)}{C}$$

Zd: No. of Teeth of Small Pulley  
θ : Contact Angle(°)  
Dp: Pitch Diameter of Large Pulley(mm)  
dp: Pitch Diameter of Small Pulley(mm)  
C: Inter-shaft Distance(mm)

**Table 27. Reference Belt Width (Wp)**

Type of Belt	MXL	XL	L	H	S2M	S3M	S5M	S8M	S14M	MTS8M
Reference Belt Width	6.4	25.4	25.4	25.4	4	6	10	60	120	60

Type of Belt	P2M	P3M	P5M	P8M	T5	T10
Reference Belt Width	4	6	10	15	10	10

(2) Check if Design Power (Pd) satisfies the following formula. (If not, select the belt width of one size larger again.)

· Pd < Ps · Km · Kb  
\*2GT · 3GT · EV5GT · EV8YU  
· Pd < Ps · Km · Kb · KL

Pd : Design Power  
Ps : Reference Transmission  
Km : Engagement Correction  
Kb : Width Correction Coefficient (Table 28)  
KL : Length Correction Coefficient (Table 29)

**Table 28. Width Correction Coefficient(Kb)**

Type of Belt	Belt Width		Width Correction Coefficient Kb	Type of Belt	Belt Width		Width Correction Coefficient Kb	Type of Belt	Belt Width		Width Correction Coefficient Kb				
	Nominal	mm			Nominal	mm			Nominal	mm		Nominal	mm		
MXL	019	4.8	0.72	S2M	040	4	1.00	P2M	40	4	1.00				
	025	6.4	1.00		060	6	1.59		60	6	1.59				
	037	9.5	1.57		100	10	2.84		100	10	1.78				
	050	12.7	2.18		060	6	1.00		150	15	2.84				
XL	025	6.4	0.15	S3M	100	10	1.79	P5M	100	10	1.00				
	031	7.9	0.21		150	15	2.84		150	15	1.59				
	037	9.5	0.28		100	10	1.00		250	25	2.84				
	050	12.7	0.42		150	15	0.21		150	15	1.00				
L	050	12.7	0.42	S5M	150	15	1.59	P8M	250	25	1.79				
	075	19.1	0.71		250	25	2.84		150	15	1.00				
	100	25.4	1.00		150	15	0.21		250	25	1.79				
	150	38.1	1.56		150	15	0.21		250	25	2.90				
H	075	19.1	0.71	S8M	250	25	0.37	T5	150	15	1.60				
	100	25.4	1.00		300	30	0.45		200	20	2.30				
	150	38.1	1.56		400	40	0.63		250	25	2.90				
	200	50.8	2.14		400	40	0.29		150	15	1.60				
S14M	400	40	0.45	MTS8M	600	60	0.45	T10	200	20	2.30				
	400	40	0.29		S14M	600	60		0.45	250	25	2.90			
	600	60	0.45			S14M	600		60	0.45	300	30	3.50		
	600	60	0.45				S14M		600	60	0.45	400	40	4.60	
	600	60	0.45						S14M	600	60	0.45	500	50	5.80
	600	60	0.45							S14M	600	60	0.45	500	50

**Table 29. Length Correction Coefficient (KL)**

Length Correction Coefficient (KL)	0.80	0.90	1.00	1.10	1.20
2GT Belt Length (mm)	130 or less	131~182	183~280	281~419	420 or less
3GT Belt Length (mm)	190 or less	191~260	261~400	401~599	600 or less
EV5GT Belt Length (mm)	440 or less	441~550	551~800	801~1100	1001 or less
EV8YU Belt Length (mm)	600 or less	601~900	901~1250	1251~1799	1800 or less



# Technical Data

## Selection of Timing Belts 3 – Transmission Capacity Table –

[Step 6] Check if Inter-Shaft Distance Adjustment Range is Larger than that in Table 16

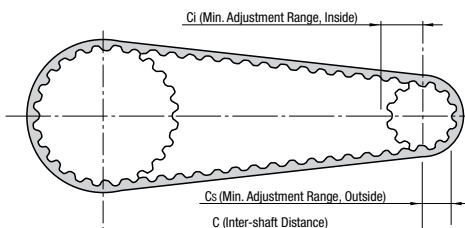


Table 16. Minimum Inter-Axial Distance Adjustment Range

Belt Length	Length Tolerance	Inter-Shaft Distance Tolerance	MXL		XL		L		H		S2M S3M S5M		S8M S14M		MTS8M		P2M P3M P5M		P8M		T5		T10	
			Ci	Cs	Ci	Cs	Ci	Cs	Ci	Cs	Ci	Cs	Ci	Cs	Ci	Cs	Ci	Cs	Ci	Cs	Ci	Cs	Ci	Cs
150 or Less	±0.35	±0.18		3		3		3		3		2		3		—		3		3		3		3
150 to 250	±0.41	±0.21		3		3		3		3		2		3		3		3		3		3		3
250 to 380	±0.46	±0.23		5		5		5		5		2		3		3		3		3		5		5
380 to 500	±0.51	±0.26		10		10		10		10		2		3		3		3		3		10		10
500 to 750	±0.60	±0.30	3	10	5	10	10	10	15	10	10	3	15	5	15	3	10	5	15	5	5	10	10	10
750 to 1000	±0.66	±0.33		15		15		15		15		3		5		5		5		5		15		15
1000 to 1250	±0.76	±0.38		15		15		15		15		5		10		5		10		10		15		15
1250 to 1500	±0.82	±0.41		25		25		25		25		5		10		10		10		10		25		25
1500 to 1750	±0.86	±0.43		25		25		25		25		5		10		10		10		10		25		25
1750 to 2000	±0.92	±0.46		30		30		30		30		5		10		10		10		10		30		30

Length	Length Tolerance	Inter-Shaft Distance Tolerance	2GT		3GT		EV5GT		EV8YU	
			Ci	Cs	Ci	Cs	Ci	Cs	Ci	Cs
150 or Less	± 0.40	± 0.20		3		3		3		3
Over 150 250 or Less	± 0.40	± 0.20		3		3		3		3
Over 250 380 or Less	± 0.46	± 0.23		3		3		3		3
Over 380 500 or Less	± 0.50	± 0.25		3		3		3		3
Over 500 750 or Less	± 0.60	± 0.30		5		5		5		5
Over 750 1000 or Less	± 0.66	± 0.33	4	5	5	5	10	5	20	5
Over 1000 1250 or Less	± 0.76	± 0.38		10		10		10		10
Over 1250 1500 or Less	± 0.82	± 0.41		10		10		10		10
Over 1500 1750 or Less	± 0.86	± 0.43		10		10		10		10
Over 1750 2000 or Less	± 0.92	± 0.46		10		10		10		10

### Notes on Operation

- Be careful to avoid the ingress of foreign particles.  
When solid foreign particles enter during operation, it can scratch the belt and adversely affect the engagement of the belt and the pulley. In some cases, the pulley may disengage, land on the teeth of the pulley, and be cut.
- Avoid Adhesion of oil.  
Oil on the rubber timing belt may wet and expand it, drastically shortening its service life.  
(a) Take special care when using solvent type oil.  
(b) A small amount of lubricant or grease, however, rarely causes a trouble.
- Do not use the belt in a humid atmosphere.
- Please use a well-ventilated safety cover.
- The service life of the belt, when used at a high temperature (80°C or more), can be drastically shortened.

### <Reference> Belt Width Tolerance

(Unit: mm)

Belt Width	Belt Length			
	351 or Less	351 to 840	840 to 1680	1680 or More
10 or Less	+0.3	+0.3	+0.3	+0.6
	-0.6	-0.6	-0.6	-0.6
10 to 40	+0.6	+0.6	+0.6	+0.6
	-0.6	-0.6	-0.6	-0.6
40 to 50	+0.6	+0.6	+1.0	+1.0
	-0.6	-0.6	-1.0	-1.3


Selection is easy with Timing Pulleys and Belts automatic calculation tool available at:

[http://fawos.misumi.jp/FA\\_WEB/pulley\\_us/](http://fawos.misumi.jp/FA_WEB/pulley_us/)

Cautions on Use of Belt

■ How to Extend Belt

When the belt is too taut, its service life can be shortened, while when it is not taut enough, the belt may (jump off) the groove of the pulley due to an activating torque or shock load. Keep the belt stationary and optimize its tautness. The warp load necessary to provide the optimum tautness can be calculated from values representing the belt, its width and the span in equation A below.

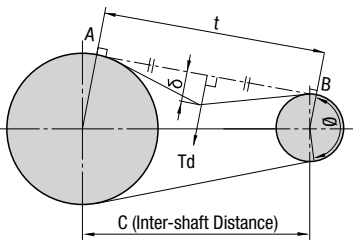

$$T_d = \frac{Ti + \frac{t \times Y}{L_p}}{16} \dots \dots \dots \text{Equation A}$$

Td: Load N Needed for Deflection d at the Center of Span t

- Ti : Initial Tension N
- Y : Correction Coefficient
- δ : Deflection (mm)
- t : Span Length (mm)

From Table 31

From Table 31

δ=0.016t

Lp : Length of the Belt (mm)

C : Inter-shaft Distance (mm)

dp : Diameter of the Pitch Circle of the Small Pulley (mm)

Dp : Diameter of the Pitch Circle of the Large Pulley (mm)

$$t = \sqrt{\frac{C^2 - (D_p - d_p)^2}{4}}$$

Table 31. Initial Tension (Ti) and Correction Coefficient (Y)

Type	Belt Nominal Width		019	025	031	037	050	075	100	150	200
	Ti-Y	Belt Width mm									
MXL	Ti	Max. Value	9.8	13.7	—	21.6	29.9	—	—	—	—
	N	Recommended Value	5.8	8.2	—	12.9	18.0	—	—	—	—
		Coefficient Y	—	—	—	—	—	—	—	—	—
XL	Ti	Max. Value	—	29	37	44	67	—	—	—	—
	N	Recommended Value	—	18	25	32	51	—	—	—	—
		Coefficient Y	—	3.8	5.4	7.6	11.8	—	—	—	—
L	Ti	Max. Value	—	—	—	—	76	125	175	273	—
	N	Recommended Value	—	—	—	—	52	87	123	191	—
		Coefficient Y	—	—	—	—	44.1	75.5	107	165	—
H	Ti	Max. Value	—	—	—	—	—	293	421	646	889
	N	Recommended Value	—	—	—	—	—	222	312	486	668
		Coefficient Y	—	—	—	—	—	142	205	317	423

Type	Belt Nominal Width		60	100	150	250
	Ti-Y	Belt Width mm				
P2M	Ti	Max. Value	13	—	—	—
	N	Recommended Value	9.8	—	—	—
		Coefficient Y	0.9	—	—	—
P3M	Ti	Max. Value	—	46	74	—
	N	Recommended Value	—	34	55	—
		Coefficient Y	—	1.9	3.0	—
P5M	Ti	Max. Value	—	147	225.4	—
	N	Recommended Value	—	107.8	166.6	—
		Coefficient Y	—	56.9	82.4	—
P8M	Ti	Max. Value	—	—	294	509.6
	N	Recommended Value	—	—	225.4	382.2
		Coefficient Y	—	—	135	239

Type	Belt Nominal Width		40	60	100	150	250	300	400	600
	Ti-Y	Belt Width mm								
S2M	Ti	Max. Value	7.8	12.7	22.6	—	—	—	—	—
	N	Recommended Value	5.9	9.8	16.7	—	—	—	—	—
		Coefficient Y	9.8	15.7	27.4	—	—	—	—	—
S3M	Ti	Max. Value	—	26	46	73	—	—	—	—
	N	Recommended Value	—	20	34	54	—	—	—	—
		Coefficient Y	—	26.5	46.1	75.5	—	—	—	—
S5M	Ti	Max. Value	—	—	77	124	221	—	—	—
	N	Recommended Value	—	—	58	93	166	—	—	—
		Coefficient Y	—	—	52.8	85.5	151.0	—	—	—
S8M MTS8M	Ti	Max. Value	—	—	—	294	510	628	873	—
	N	Recommended Value	—	—	—	226	382	470	657	—
		Coefficient Y	—	—	—	98	196	235	333	—
S14M	Ti	Max. Value	—	—	—	—	—	—	1226	1912
	N	Recommended Value	—	—	—	—	—	—	1108	1726
		Coefficient Y	—	—	—	—	—	—	686	1059

Type	Belt Nominal Width		100	150	200	250	300	400	500
	Ti-Y	Belt Width mm							
T5	Ti	Max. Value	37.3	59	85	106	—	—	—
	N	Recommended Value	24.5	39	59	74	—	—	—
		Coefficient Y	16.7	26.5	38.2	47.5	—	—	—
T10	Ti	Max. Value	—	162	235	294	363	500	628
	N	Recommended Value	—	108	157	196	245	333	422
		Coefficient Y	—	71.6	104.9	130.4	163.8	222.6	281.5

Type	Belt Nominal Width		4	6	9	12	15	20	25
	Ti-Y	Belt Width mm							
2GT	Ti	Max. Value	12.2	20.5	32.8	—	—	—	—
	N	Recommended Value	9.4	15.8	25.2	—	—	—	—
		Coefficient Y	—	—	—	—	—	—	—
3GT	Ti	Max. Value	—	38	57	—	96	—	—
	N	Recommended Value	—	29	44	—	74	—	—
		Coefficient Y	—	—	—	—	—	—	—
EV5GT	Ti	Max. Value	—	—	92	127	163	—	—
	N	Recommended Value	—	—	71	98	125	—	—
		Coefficient Y	—	—	—	—	—	—	—
EV8YU	Ti	Max. Value	—	—	—	—	273	364	455
	N	Recommended Value	—	—	—	—	210	280	350
		Coefficient Y	—	—	—	—	—	—	—



# Technical Data

## Selection of Timing Belts 4 – Transmission Capacity Table –

**Table 32. Reference Transmission Capacity of MXL Ps – Nominal Width of Belts 025 (6.4 mm) –**

(W)

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley Diameter of the Pitch Circle (mm)	12	14	15	16	18	20	22	24	25	26	28	30	32	36	40
		7.76	9.06	9.70	10.35	11.64	12.94	14.23	15.52	16.17	16.82	18.11	19.40	20.70	23.29	25.97
950	9.0	10.5	11.3	12.0	13.5	15.0	16.5	18.0	18.8	19.6	21.1	22.6	24.1	27.1	30.1	
1160	11.0	12.8	13.8	14.7	16.5	18.4	20.2	22.0	23.0	23.9	25.7	27.6	29.4	33.1	36.7	
1425		15.8	16.9	18.0	20.3	22.6	24.8	27.1	28.2	29.3	31.6	33.9	36.1	40.6	45.1	
1750		19.4	20.8	22.2	24.9	27.7	30.5	33.3	34.7	36.0	38.8	41.6	44.3	49.9	55.4	
2850			33.9	36.1	40.6	45.1	49.6	54.1	56.4	58.6	63.1	67.6	72.1	81.0	90.0	
3450			41.0	43.7	49.2	54.6	60.1	65.5	68.2	70.9	76.3	81.7	87.1	97.9	108.6	
100	0.9	1.1	1.1	1.2	1.4	1.5	1.7	1.9	1.9	2.0	2.2	2.3	2.5	2.8	3.1	
200	1.9	2.2	2.3	2.5	2.8	3.1	3.4	3.8	3.9	4.1	4.4	4.7	5.0	5.7	6.3	
300	2.8	3.3	3.5	3.8	4.2	4.7	5.2	5.7	5.9	6.1	6.6	7.1	7.6	8.5	9.5	
400	3.8	4.4	4.7	5.0	5.7	6.3	6.9	7.6	7.9	8.2	8.8	9.5	10.1	11.4	12.6	
500	4.7	5.5	5.9	6.3	7.1	7.9	8.7	9.5	9.9	10.3	11.1	11.9	12.6	14.2	15.8	
600	5.7	6.6	7.1	7.6	8.5	9.5	10.4	11.4	11.9	12.3	13.3	14.2	15.2	17.1	19.0	
700	6.6	7.7	8.3	8.8	10.0	11.1	12.2	13.3	13.8	14.4	15.5	16.6	17.7	19.9	22.2	
800	7.6	8.8	9.5	10.1	11.4	12.6	13.9	15.2	15.8	16.5	17.7	19.0	20.3	22.8	25.3	
900	8.5	10.0	10.7	11.4	12.8	14.2	15.7	17.1	17.8	18.5	19.9	21.4	22.8	25.7	28.5	
1000	9.5	11.1	11.9	12.6	14.2	15.8	17.4	19.0	19.8	20.6	22.2	23.8	25.3	28.5	31.7	
1100	10.4	12.2	13.0	13.9	15.7	17.4	19.2	20.9	21.8	22.6	24.4	26.1	27.9	31.4	34.8	
1200	11.4	13.3	14.2	15.2	17.1	19.0	20.9	22.8	23.8	24.7	26.6	28.5	30.4	34.2	38.0	
1300		14.4	15.4	16.5	18.5	20.6	22.6	24.7	25.7	26.8	28.8	30.9	32.9	37.1	41.2	
1400		15.5	16.6	17.7	19.9	22.2	24.4	26.6	27.7	28.8	31.0	33.3	35.5	39.9	44.3	
1500		16.6	17.8	19.0	21.4	23.8	26.1	28.5	29.7	30.9	33.3	35.6	38.0	42.8	47.5	
1600		17.7	19.0	20.3	22.8	25.3	27.9	30.4	31.7	32.9	35.5	38.0	40.5	45.6	50.7	
1700		18.8	20.2	21.5	24.2	26.9	29.6	32.3	33.7	35.0	37.7	40.4	43.1	48.5	53.8	
1800		19.9	21.4	22.8	25.7	28.5	31.4	34.2	35.6	37.1	39.9	42.8	45.6	51.3	57.0	
2000			23.8	25.3	28.5	31.7	34.8	38.0	39.6	41.2	44.3	47.5	50.7	57.0	63.3	
2200			26.1	27.9	31.4	34.8	38.3	41.8	43.6	45.3	48.8	52.2	55.7	62.7	69.6	
2400			28.5	30.4	34.2	38.0	41.8	45.6	47.5	49.4	53.2	57.0	60.8	68.3	75.9	
2600			30.9	32.9	37.1	41.2	45.3	49.4	51.5	53.5	57.6	61.7	65.8	74.0	82.1	
2800				35.5	39.9	44.3	48.8	53.2	55.4	57.6	62.0	66.4	70.8	79.6	88.4	
3000				38.0	42.8	47.5	52.2	57.0	59.3	61.7	66.4	71.2	75.9	85.3	94.6	
3200				40.5	45.6	50.7	55.7	60.8	63.3	65.8	70.8	75.9	80.9	90.9	100.9	
3400				43.1	48.5	53.8	59.2	64.5	67.2	69.9	75.2	80.6	85.9	96.5	107.1	
3600				45.6	51.3	57.0	62.7	68.3	71.2	74.0	79.6	85.3	90.9	102.1	113.3	
3800					54.1	60.1	66.1	72.1	75.1	78.1	84.0	90.0	95.9	107.7	119.5	
4000					57.0	63.3	69.6	75.9	79.0	82.1	88.4	94.6	100.9	113.3	125.6	
4200					59.8	66.4	73.0	79.6	82.9	86.2	92.8	99.3	105.8	118.8	131.8	
4400					62.7	69.6	76.5	83.4	86.8	90.3	97.1	104.0	110.8	124.4	137.9	
4600					65.5	72.7	79.9	87.1	90.7	94.3	101.5	108.6	115.8	129.9	144.0	
4800					68.3	75.9	83.4	90.9	94.6	98.4	105.8	113.3	120.7	135.4	150.0	

\*Values in the table above are for nominal belt width 025 (6.4 mm). For other belt widths, those values should be multiplied by the width correction coefficient, Kb, shown in Table 28.

**Table 33. Reference Transmission Capacity of XL Ps – Nominal Width of Belts 100 (25.4 mm) –**

(kW)

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley Diameter of the Pitch Circle (mm)	10	11	12	14	15	16	18	19	20	21	22	24	25	26	28	30
		16.17	17.79	19.40	22.64	24.26	25.87	29.11	30.72	32.34	33.96	35.57	38.81	40.43	42.04	45.28	48.51
950	0.14	0.16	0.17	0.20	0.21	0.23	0.26	0.27	0.29	0.30	0.32	0.35	0.36	0.38	0.41	0.43	
1160	0.17	0.19	0.21	0.25	0.26	0.28	0.32	0.33	0.35	0.37	0.39	0.42	0.44	0.46	0.50	0.53	
1425			0.26	0.30	0.32	0.35	0.39	0.41	0.43	0.46	0.48	0.52	0.54	0.57	0.61	0.65	
1750			0.32	0.37	0.40	0.43	0.48	0.51	0.53	0.56	0.59	0.64	0.67	0.69	0.75	0.80	
2850			0.52	0.61	0.65	0.07	0.78	0.82	0.87	0.91	0.95	1.04	1.08	1.12	1.21	1.29	
3450			0.63	0.74	0.79	0.84	0.94	1.00	1.05	1.10	1.15	1.25	1.30	1.35	1.45	1.55	
100	0.01	0.01	0.01	0.02	0.02	0.02	0.02	0.02	0.03	0.03	0.03	0.03	0.03	0.04	0.04	0.04	
200	0.03	0.03	0.03	0.04	0.04	0.04	0.05	0.05	0.06	0.06	0.06	0.07	0.07	0.08	0.08	0.09	
300	0.04	0.05	0.05	0.06	0.06	0.07	0.08	0.08	0.09	0.09	0.10	0.11	0.11	0.12	0.12	0.13	
400	0.06	0.06	0.07	0.08	0.09	0.09	0.11	0.11	0.12	0.12	0.13	0.14	0.15	0.16	0.17	0.18	
500	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.16	0.18	0.19	0.20	0.21	0.23	
600	0.09	0.10	0.11	0.12	0.13	0.14	0.16	0.17	0.18	0.19	0.20	0.22	0.23	0.24	0.25	0.27	
700	0.10	0.11	0.12	0.15	0.16	0.17	0.19	0.20	0.21	0.22	0.23	0.25	0.27	0.28	0.30	0.32	
800	0.12	0.13	0.14	0.17	0.18	0.19	0.22	0.23	0.24	0.25	0.27	0.29	0.30	0.32	0.34	0.37	
900	0.13	0.15	0.16	0.19	0.20	0.22	0.25	0.26	0.27	0.29	0.30	0.33	0.34	0.36	0.38	0.41	
1000	0.15	0.16	0.18	0.21	0.23	0.24	0.27	0.29	0.30	0.32	0.33	0.37	0.38	0.40	0.43	0.46	
1100	0.16	0.18	0.20	0.23	0.25	0.27	0.30	0.32	0.33	0.35	0.37	0.40	0.42	0.44	0.47	0.50	
1200	0.18	0.20	0.22	0.25	0.27	0.29	0.33	0.35	0.37	0.38	0.40	0.44	0.46	0.48	0.51	0.55	
1300			0.24	0.28	0.30	0.32	0.36	0.38	0.40	0.42	0.44	0.48	0.50	0.52	0.56	0.59	
1400			0.25	0.30	0.32	0.34	0.38	0.41	0.43	0.45	0.47	0.51	0.53	0.56	0.60	0.64	
1500			0.27	0.32	0.34	0.37	0.41	0.43	0.46	0.48	0.50	0.55	0.57	0.59	0.64	0.69	
1600			0.29	0.34	0.37	0.39	0.44	0.46	0.49	0.51	0.54	0.59	0.61	0.63	0.68	0.73	
1700			0.31	0.36	0.39	0.41	0.47	0.49	0.52	0.54	0.57	0.62	0.65	0.67	0.73	0.78	
1800			0.33	0.38	0.41	0.44	0.49	0.52	0.55	0.58	0.60	0.66	0.69	0.71	0.77	0.82	
2000			0.37	0.43	0.46	0.49	0.55	0.58	0.61	0.64	0.67	0.73	0.76	0.79	0.85	0.91	
2200			0.40	0.47	0.50	0.54	0.60	0.64	0.67	0.70	0.74	0.80	0.84	0.87	0.94	1.00	
2400			0.44	0.51	0.55	0.59	0.66	0.70	0.73	0.77	0.80	0.88	0.91	0.95	1.02	1.09	
2600			0.48	0.56	0.59	0.63	0.71	0.75	0.79	0.83	0.87	0.95	0.99	1.03	1.10	1.18	
2800			0.51	0.60	0.64	0.68	0.77	0.81	0.85	0.89	0.94	1.02	1.06	1.10	1.19	1.27	
3000			0.55	0.64	0.69	0.73	0.82	0.87	0.91	0.96	1.00	1.09	1.14	1.18	1.27	1.35	
3200			0.59	0.68	0.73	0.78	0.88	0.92	0.97	1.02	1.07	1.16	1.21	1.26	1.35	1.44	
3400			0.62	0.73	0.78	0.83	0.93	0.98	1.03	1.08	1.13	1.23	1.28	1.33	1.43	1.53	
3600			0.66	0.77	0.82	0.88	0.98	1.04	1.09	1.14	1.20	1.30	1.35	1.41	1.51	1.61	
3800					0.87	0.92	1.04	1.09	1.15	1.21	1.26	1.37	1.43	1.48	1.59	1.69	
4000					0.91	0.97	1.09	1.15	1.21	1.27	1.33	1.44	1.50	1.55	1.67	1.78	
4200					0.96	1.02	1.14	1.21	1.27	1.33	1.39	1.51	1.57	1.63	1.74	1.86	
4400					1.00	1.07	1.20	1.26	1.33	1.39	1.45	1.58	1.64	1.70	1.82	1.94	
4600					1.05	1.12	1.25	1.32	1.38	1.45	1.52	1.64	1.71	1.77	1.90		





Selection is easy with Timing Pulleys and Belts automatic calculation tool available at:  
[http://fawos.misumi.jp/FA\\_WEB/pulley\\_us/](http://fawos.misumi.jp/FA_WEB/pulley_us/)

Table 34. Reference Transmission Capacity of L Ps – Nominal Width of Belts 100 (25.4 mm) –

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley	Diameter of the Pitch Circle (mm)																	(kW)
		12	14	15	16	18	19	20	21	22	24	25	26	28	30	32	36	40	
725	36.38	0.33	0.39	0.42	0.44	0.50	0.53	0.56	0.58	0.61	0.67	0.70	0.72	0.78	0.83	0.89	1.00	1.11	1.33
	42.45	0.40	0.47	0.50	0.53	0.60	0.63	0.67	0.70	0.73	0.80	0.83	0.87	0.93	1.00	1.07	1.20	1.33	1.59
	45.48	0.44	0.51	0.55	0.58	0.66	0.69	0.73	0.77	0.80	0.87	0.91	0.95	1.02	1.09	1.16	1.31	1.45	1.73
	48.51	0.53	0.62	0.67	0.71	0.80	0.85	0.89	0.93	0.98	1.07	1.11	1.15	1.24	1.33	1.41	1.59	1.76	2.09
	54.57	0.77	0.82	0.87	0.98	1.04	1.09	1.14	1.20	1.31	1.36	1.41	1.52	1.62	1.73	1.93	2.13	2.52	3.02
1160	57.61	0.94	1.01	1.07	1.20	1.27	1.34	1.40	1.47	1.59	1.66	1.72	1.85	1.97	2.10	2.34	2.58	3.02	3.64
	60.64	1.73	1.93	2.03	2.13	2.23	2.33	2.52	2.62	2.71	2.89	3.07	3.24	3.56	3.84	4.31	5.18	6.27	7.59
	63.67	2.07	2.31	2.43	2.54	2.66	2.77	2.99	3.09	3.19	3.39	3.58	3.76	4.07	4.33	4.67	5.18	6.13	7.43
	66.70	0.04	0.05	0.05	0.06	0.06	0.07	0.07	0.08	0.08	0.09	0.09	0.10	0.10	0.11	0.12	0.13	0.15	0.18
	72.77	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.21	0.23	0.24	0.27	0.30	0.37
1425	75.80	0.13	0.16	0.17	0.18	0.20	0.22	0.23	0.24	0.25	0.27	0.29	0.30	0.32	0.34	0.37	0.41	0.46	0.55
	78.83	0.18	0.21	0.23	0.24	0.27	0.29	0.30	0.32	0.34	0.37	0.38	0.40	0.43	0.46	0.49	0.55	0.61	0.74
	84.89	0.23	0.27	0.29	0.30	0.34	0.36	0.38	0.40	0.42	0.46	0.48	0.50	0.54	0.58	0.61	0.69	0.77	0.92
	90.96	0.27	0.32	0.34	0.37	0.41	0.44	0.46	0.48	0.51	0.55	0.58	0.60	0.64	0.69	0.74	0.83	0.92	1.10
	97.02	0.32	0.37	0.40	0.43	0.48	0.51	0.54	0.56	0.59	0.64	0.67	0.70	0.75	0.81	0.86	0.97	1.07	1.28
1750	101.06	0.37	0.43	0.46	0.49	0.55	0.58	0.61	0.64	0.68	0.74	0.77	0.80	0.86	0.92	0.98	1.10	1.22	1.46
	105.11	0.41	0.48	0.52	0.55	0.62	0.66	0.69	0.73	0.76	0.83	0.86	0.90	0.97	1.03	1.10	1.24	1.37	1.64
	113.19	0.46	0.54	0.58	0.61	0.69	0.73	0.77	0.81	0.84	0.92	0.96	1.00	1.07	1.15	1.22	1.37	1.52	1.81
	121.28	0.51	0.59	0.63	0.68	0.76	0.80	0.84	0.89	0.93	1.01	1.05	1.09	1.18	1.26	1.34	1.51	1.67	1.99
	129.36	0.55	0.64	0.69	0.74	0.83	0.87	0.92	0.97	1.01	1.10	1.15	1.19	1.28	1.37	1.46	1.64	1.81	2.15
2000	137.44	0.70	0.75	0.80	0.90	0.95	1.00	1.05	1.09	1.19	1.24	1.29	1.39	1.48	1.58	1.77	1.96	2.32	2.80
	145.52	0.75	0.81	0.86	0.97	1.02	1.07	1.12	1.18	1.28	1.34	1.39	1.49	1.59	1.70	1.90	2.10	2.48	3.02
	153.60	0.81	0.86	0.92	1.03	1.09	1.15	1.20	1.26	1.37	1.43	1.48	1.59	1.70	1.81	2.03	2.24	2.64	3.24
	161.68	0.86	0.92	0.98	1.10	1.16	1.22	1.28	1.34	1.46	1.52	1.58	1.70	1.81	1.93	2.15	2.38	2.80	3.42
	169.76	0.91	0.98	1.04	1.17	1.23	1.30	1.36	1.42	1.55	1.61	1.68	1.80	1.92	2.04	2.28	2.51	2.95	3.60
2250	177.84	0.97	1.03	1.10	1.24	1.31	1.37	1.44	1.51	1.64	1.70	1.77	1.90	2.03	2.15	2.40	2.64	3.10	3.78
	185.92	1.16	1.31	1.38	1.45	1.52	1.59	1.73	1.80	1.86	2.00	2.13	2.27	2.52	2.77	3.24	3.60	4.32	5.28
	194.00	1.22	1.37	1.45	1.52	1.59	1.67	1.81	1.89	1.96	2.10	2.24	2.38	2.64	2.90	3.30	3.66	4.44	5.40
	202.08	1.34	1.51	1.59	1.67	1.75	1.83	1.99	2.06	2.24	2.32	2.41	2.58	2.74	2.90	3.10	3.30	3.96	4.80
	210.16	1.46	1.64	1.73	1.81	1.90	1.99	2.15	2.24	2.42	2.50	2.67	2.84	3.00	3.19	3.38	3.70	4.44	5.40
2500	218.24	1.52	1.70	1.80	1.89	1.97	2.06	2.24	2.32	2.41	2.58	2.74	2.90	3.10	3.30	3.60	4.14	5.10	6.12
	226.32	1.58	1.77	1.86	1.96	2.05	2.14	2.32	2.41	2.50	2.67	2.84	3.00	3.19	3.38	3.70	4.44	5.40	6.42
	234.40	1.70	1.90	2.00	2.10	2.20	2.29	2.48	2.58	2.67	2.85	3.02	3.19	3.38	3.55	3.87	4.50	5.46	6.54
	242.48	1.81	2.03	2.13	2.24	2.34	2.44	2.64	2.74	2.84	3.02	3.20	3.38	3.57	3.76	4.04	4.80	5.76	6.90
	250.56	1.93	2.15	2.27	2.38	2.48	2.59	2.80	2.90	3.00	3.19	3.38	3.55	3.87	4.14	4.50	5.40	6.42	7.56
2750	258.64	2.04	2.28	2.40	2.51	2.62	2.73	2.95	3.05	3.16	3.35	3.54	3.72	4.04	4.30	4.65	5.40	6.42	7.62
	266.72	2.15	2.40	2.52	2.64	2.76	2.87	3.10	3.20	3.31	3.51	3.70	3.87	4.18	4.43	4.80	5.64	6.66	7.92
	274.80	2.52	2.65	2.77	2.89	3.01	3.24	3.35	3.45	3.66	3.84	4.02	4.31	4.54	4.73	5.10	5.94	7.02	8.22
	282.88	2.64	2.77	2.90	3.02	3.14	3.38	3.49	3.59	3.80	3.98	4.15	4.43	4.62	4.72	5.10	5.94	7.02	8.22
	290.96	2.76	2.89	3.02	3.15	3.27	3.51	3.62	3.73	3.93	4.11	4.27	4.53	4.69	4.86	5.18	5.94	7.02	8.22
3000	299.04	2.87	3.01	3.14	3.27	3.40	3.64	3.75	3.85	4.05	4.23	4.38	4.61	4.72	5.10	5.94	7.02	8.22	9.54
	307.12	2.99	3.13	3.26	3.39	3.52	3.76	3.87	3.97	4.17	4.33	4.48	4.67	4.73	5.10	5.94	7.02	8.22	9.54
	315.20	3.10	3.24	3.38	3.51	3.64	3.87	3.98	4.09	4.27	4.43	4.56	4.71	4.72	5.10	5.94	7.02	8.22	9.54
	323.28	3.22	3.36	3.50	3.63	3.76	3.99	4.10	4.20	4.39	4.55	4.71	4.86	5.01	5.16	5.40	6.12	7.26	8.52
	331.36	3.34	3.48	3.62	3.75	3.88	4.11	4.22	4.31	4.50	4.66	4.81	4.96	5.11	5.26	5.50	6.22	7.36	8.62

\*  $\frac{v}{33}$  The circumferential speed of pulley is 33(m/s) or more; a dynamic balance for the pulley is essential.

\* Values in the table above are for nominal belt width 100 (25.4 mm). For other belt widths, those values should be multiplied by the width correction coefficient, Kb, shown in Table 28.

Table 35. Reference Transmission Capacity of H Ps – Nominal Width of Belts 100 (25.4 mm) –

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley	Diameter of the Pitch Circle (mm)																	(kW)
		14	15	16	18	19	20	21	22	24	25	26	28	30	32	36	40	48	
725	56.60	1.33	1.43	1.52	1.71	1.81	1.90	2.00	2.09	2.28	2.38	2.47	2.66	2.85	3.04	3.41	3.79	4.53	5.41
	60.64	1.60	1.71	1.83	2.05	2.17	2.28	2.40	2.51	2.74	2.85	2.96	3.19	3.41	3.64	4.08	4.53	5.41	6.42
	64.68	1.99	2.24	2.37	2.49	2.61	2.74	2.99	3.11	3.23	3.48	3.72	3.97	4.38	4.65	4.93	5.89	7.02	8.22
	72.77	2.43	2.74	2.89	3.04	3.19	3.34	3.64	3.79	3.94	4.23	4.53	4.82	5.41	5.99	6.57	7.71	9.00	10.32
	76.81	3.35	3.54	3.72	3.91	4.09	4.45	4.63	4.81	5.17	5.53	5.89	6.59	7.27	7.96	9.26	10.77	12.39	14.13
1160	80.85	4.55	4.78	5.00	5.44	5.66	6.31	6.73	7.16	7.98	8.79	10.32	12.16	13.15	14.80	16.80	19.08	21.66	24.54
	84.89	7.27	7.61	7.95	8.61	8.93	9.25	9.87	10.48	11.06	12.16	13.15	14.80	16.80	19.08	21.66	24.54	27.72	31.26
	88.94	8.68	9.07	9.45	10.19	10.55	10.91	11.59	12.24	12.85	13.95	14.87	16.80	19.08	21.66	24.54	27.72	31.26	35.10
	97.02	0.18	0.19	0.21	0.23	0.25	0.26	0.27	0.28	0.31	0.32	0.34	0.36	0.39	0.42	0.47	0.52	0.63	0.74
	101.06	0.36	0.39	0.42	0.47	0.50	0.52	0.55	0.57	0.63	0.65	0.68	0.73	0.79	0.84	0.94	1.05	1.26	1.47
1425	105.11	0.55	0.59	0.63	0.71	0.75	0.79	0.83	0.86	0.94	0.98	1.02	1.10	1.18	1.26	1.42	1.57	1.89	2.20
	113.19	0.73	0.79	0.84	0.94	1.00	1.05	1.10	1.15	1.26	1.31	1.36	1.47	1.57	1.68	1.89	2.10	2.52	2.94
	121.28	0.92	0.98	1.05	1.18	1.25	1.31	1.38	1.44	1.57	1.64	1.71	1.84	1.97	2.10	2.36	2.62	3.14	3.66
	129.36	1.10	1.18	1.26	1.42	1.50	1.57	1.65	1.73	1.89	1.97	2.05	2.20	2.36	2.52	2.83	3.14	3.76	4.44
	137.44	1.29	1.38	1.47	1.65	1.75	1.84	1.93	2.02	2.20	2.30	2.39	2.57	2.75	2.93	3.30	3.66	4.38	5.10
1750	145.52	1.47	1.57	1.68	1.89	1.99	2.10	2.20	2.31	2.52	2.62	2.73	2.93	3.14	3.35	3.76	4.17	4.99	5.82
	153.60	1.65	1.77	1.89	2.13	2.24	2.36	2.48	2.60	2.83	2.95	3.06	3.30	3.53	3.76	4.			



# Technical Data

## Selection of Timing Belts 5 – Transmission Capacity Table –

Table 36. Reference Transmission Capacity of S2M Ps -Belt Width 4mm-

(W)

Rotary Speed of Small Pulley(rpm)	No. of Teeth of Small Pulley	Diameter of the Pitch Circle(mm)	14	15	16	18	20	22	24	25	26	28	30	32	36	40	44	48	50	60
			8.91	9.55	10.19	11.46	12.73	14.01	15.28	15.92	16.55	17.83	19.10	20.37	22.92	25.46	28.01	30.56	31.83	38.20
870	1	1	2	2	2	2	2	2	2	2	2	3	3	3	4	4	5	5	6	
1150	3	3	3	4	4	4	4	4	4	4	4	5	5	5	6	6	7	7	8	
1750	13	15	17	20	23	26	29	31	32	35	38	41	46	52	57	62	65	77	105	
3500	26	30	34	41	49	56	63	67	70	77	83	90	102	115	126	138	143	170	230	
50	1	1	2	2	2	2	2	2	2	2	2	3	3	3	4	4	5	5	6	
100	2	2	2	3	3	3	3	3	3	3	4	4	4	5	5	6	6	7	8	
150	3	3	3	4	4	4	4	4	4	4	5	5	5	6	6	7	7	8	9	
200	4	4	4	5	5	5	5	5	5	5	6	6	6	7	7	8	8	9	11	
250	4	5	5	6	6	6	6	6	6	6	7	7	7	8	8	9	10	11	12	
300	5	5	6	7	7	7	7	7	7	7	8	8	8	9	9	10	11	12	13	
350	6	6	7	8	8	8	8	8	8	8	9	9	9	10	10	11	12	13	14	
400	6	7	8	9	9	9	9	9	9	9	10	10	10	11	11	12	13	14	15	
450	7	8	9	10	10	10	10	10	10	10	11	11	11	12	12	13	14	15	16	
500	7	8	9	11	12	14	15	16	17	18	20	21	24	27	29	32	33	34	36	
550	8	9	10	11	13	15	17	18	19	21	23	25	28	31	35	36	38	40	43	
600	8	9	10	12	14	16	18	18	19	21	23	24	28	31	34	37	39	40	46	
650	9	10	11	13	15	17	19	20	21	22	24	26	30	33	36	40	41	49	60	
700	9	10	12	14	16	18	20	21	22	24	26	28	31	35	39	42	44	52	65	
750	10	11	12	14	17	19	21	22	23	25	27	29	33	37	41	44	46	55	68	
800	10	12	13	15	17	20	22	23	24	26	28	31	35	39	43	47	49	58	72	
850	11	12	13	16	18	21	23	24	25	28	30	32	36	41	45	49	51	61	75	
900	11	13	14	16	19	22	24	25	26	29	31	34	38	43	47	51	53	63	78	
950	12	13	14	17	20	22	25	26	28	30	33	35	40	44	49	53	56	66	81	
1000	12	14	15	18	21	23	26	27	29	31	34	36	41	46	51	55	58	69	84	
1100	13	14	15	19	22	25	28	29	31	34	36	40	44	50	55	60	62	74	90	
1200	14	15	17	20	24	27	30	31	33	36	39	42	47	53	58	64	68	79	96	
1300	14	16	18	22	25	28	32	33	35	38	41	44	50	56	62	68	71	84	101	
1400	15	17	19	23	26	30	33	35	37	40	44	47	53	60	66	72	75	89	107	
1500	16	18	20	24	28	31	35	37	39	42	46	49	56	63	69	75	79	94	112	
1600	17	19	21	25	29	33	37	39	41	44	48	52	59	66	73	79	82	98	117	
1700	17	19	22	26	30	34	39	41	43	46	50	54	62	69	76	83	86	103	123	
1800	18	20	23	27	31	36	40	42	44	48	52	56	64	72	79	86	90	107	128	
1900	18	21	23	28	33	37	42	44	46	50	55	59	67	75	82	90	94	111	132	
2000	19	22	24	29	34	39	43	46	48	52	57	61	69	78	85	93	97	114	135	
2200	20	23	26	31	36	41	46	49	51	56	61	65	74	83	92	100	104	122	144	
2400	21	24	27	33	38	44	49	52	54	59	64	68	79	88	97	106	111	131	154	
2600	22	25	28	35	40	46	52	55	57	63	68	73	84	93	103	112	117	139	162	
2800	23	26	30	36	42	49	55	57	60	66	72	77	88	98	109	118	123	146	174	
3000	24	28	31	38	44	51	57	60	63	69	75	81	92	103	114	124	129	153	181	
3200	25	29	32	39	46	53	60	63	66	72	79	85	96	108	119	130	135	160	188	
3400	26	30	33	41	48	55	62	65	69	75	82	88	100	112	124	135	140	167	200	
3600	27	31	34	42	50	57	64	68	71	78	85	92	104	117	129	140	146	173	210	
3800	28	32	35	44	51	59	67	70	74	81	88	95	108	121	133	145	151	179	219	
4000	28	32	36	45	53	61	69	73	76	84	91	98	112	125	138	150	156	185	227	
4500	29	34	39	48	57	66	74	78	82	90	98	106	120	135	149	162	168	199	239	
5000	30	36	41	51	60	70	79	83	88	96	105	113	129	144	159	173	179	211	252	
5500	32	37	43	53	63	74	83	88	93	102	111	119	136	152	168	183	190	223	266	
6000	33	38	44	56	66	77	87	92	97	107	117	126	143	160	176	192	199	233	280	
6500	33	40	46	58	69	80	91	97	102	112	122	132	150	168	184	200	208	243	293	
7000	34	41	48	61	72	83	94	100	106	117	127	137	156	174	192	209	216	251	306	
7500	34	41	48	61	74	86	98	104	110	121	132	142	162	181	198	215	223	259	319	
8000	35	42	49	63	76	89	101	107	113	125	136	147	167	187	205	222	229	265	326	
8500	35	43	50	64	78	91	104	110	116	128	140	151	172	192	210	227	235	270	333	
9000	35	43	51	65	80	94	107	113	119	132	144	155	177	197	215	232	240	275	340	

\*Values in the table above are for 4mm belt width. For other belt widths, those values should be multiplied by the width correction coefficient, Kb, shown in Table 28.

Table 37. Reference Transmission Capacity of S3M Ps -Belt Width 6mm-

(W)

Rotary Speed of Small Pulley(rpm)	No. of Teeth of Small Pulley	Diameter of the Pitch Circle(mm)	14	15	16	18	20	22	24	25	26	28	30	32	36	40	44	48	50	60
			13.37	14.32	15.28	17.19	19.10	21.01	22.92	23.87	24.83	26.74	28.65	30.56	34.38	38.20	42.02	45.84	47.75	57.30
870	5	5	6	7	7	8	8	8	9	9	10	11	11	13	14	15	17	17	20	
1150	6	7	7	8	8	9	10	11	12	13	14	15	16	17	18	19	21	21	25	
1750	12	13	14	17	18	20	22	23	24	26	27	29	33	35	37	42	46	50	57	
3500	24	27	29	36	40	46	53	57	63	70	77	84	97	108	121	135	150	166	196	
50	5	5	6	7	7	8	8	8	9	9	10	11	11	13	14	15	17	17	20	
100	9	9	10	12	13	14	15	16	17	18	19	21	21	23	25	28	30	31	37	
150	12	13	14	17	18	20	22	23	24	26	27	29	33	35	37	42	46	50	57	
200	16	17	18	22	23	26	28	29	30	33	35	37	42	45	50	55	61	66	80	
250	19	21	22	26	28	31	34	35	37	39	42	45	50	55	61	66	71	84	101	
300	22	24	25	31	33	36	39	41	43	46	49	52	58	63	69	75	81	96	115	
350	25	27	29	35	37	41	45	47	49	52	56	59	66	73	80	87	90	106	127	
400	28	31	33	39	42	46	50	52	54	58	62	66	74	82	90	97	101	119	142	
450	31	34	36	43	46	51	55	58	60	64	69	73	82	90	99	107	111	131	156	
500	34	37	39	47	50	55	60	63	65	70	75	80	89	99	108	117	121	143	170	
550	37	40	42	50	54	60	65	68	71	76	81	86	97	107	116	124	129	153	181	
600	39	43	46	54	58	64	70	73	76	82	87	93	104	114	125	135	140	165	194	
650	42	46	49	58	62	69	75	78	81	87	93	99	111	122	133	144	150	176	206	
700	45	48	52	62	66	73	79	83	86	92	99	105	118	130	142	153	159	187	220	
750	47	51	55	65	70	77	84	87	91	98	105	111	124	137	150	162	168	198	234	
800	50	54	58	69	73	81	89	92	96	103	110	117	131	145	158	171	177	208	246	
850	52	57	61	72	77	86	93	97	101	108	116	123	138	152	166	179	186	218	258	
90																				



Selection is easy with Timing Pulleys and Belts automatic calculation tool available at:

http://fawos.misumi.jp/FA\_WEB/pulley\_us/

Table 38. Reference Transmission Capacity of S5M Ps -Belt Width 10mm-

(W)

Table with 19 columns (Rotary Speed of Small Pulley, No. of Teeth of Small Pulley, and 17 capacity values) and 50 rows of data.

\* The circumferential speed of pulley is 33(m/s) or more; a dynamic balance for the pulley is essential. \*Values in the table above are for 10mm belt width. For other belt widths, those values should be multiplied by the width correction coefficient, Kb, shown in Table 28.

Table 39. Reference Transmission Capacity of S8M Ps -Belt Width 60mm-

(kW)

Table with 19 columns (Rotary Speed of Small Pulley, No. of Teeth of Small Pulley, and 17 capacity values) and 50 rows of data.

\*Because the durability in terms of hours decreases in the marked range, this range should be avoided whenever possible. \*The circumferential speed of pulley is 33(m/s) or more; a dynamic balance for the pulley is essential. \*Values in the table above are for 60mm belt width. For other belt widths, those values should be multiplied by the width correction coefficient, Kb, shown in Table 28.



# Technical Data

## Selection of Timing Belts 6 – Transmission Capacity Table –

**Table 40. Reference Transmission Capacity of S14M  
Ps – Belt Width 120mm – (kW)**

Rotary Speed of Small Pulley (rpm)	Number of Teeth of the Pulley (T)															
	28	30	32	34	36	40	42	44	48	50	56	60	64	72	84	
	Pitch Dia. (mm)															
	124.78	133.69	142.60	151.52	160.43	178.25	187.17	196.08	213.90	222.82	249.55	267.38	285.21	320.86	374.33	
575	32.08	34.36	36.63	38.90	41.17	45.68	47.94	50.19	54.67	56.91	63.58	68.00	72.39	81.10	93.92	
690	38.45	41.17	43.88	46.59	49.29	54.67	57.36	60.03	65.35	68.00	75.89	81.09	86.26	96.44	111.32	
870	48.35	51.75	55.14	58.52	61.88	68.57	71.90	75.20	81.77	85.03	94.68	101.02	107.27	119.49	136.99	
1160	64.12	68.57	73.00	77.40	81.77	90.41	94.69	98.92	107.27	111.39	123.46	131.27	138.87	153.39	173.25	
1750	95.20	101.57	107.84	114.03	120.11	131.93	137.68	143.29	154.11	159.32	174.00	182.96	191.21	205.36	220.00	
3450	172.13	181.10	189.39	196.95	203.72	214.76	218.93	222.13	225.47							
20	1.12	1.20	1.28	1.36	1.44	1.60	1.68	1.76	1.92	2.00	2.24	2.40	2.56	2.88	3.36	
40	2.24	2.40	2.56	2.72	2.88	3.20	3.36	3.52	3.84	4.00	4.48	4.80	5.12	5.76	6.71	
60	3.36	3.60	3.84	4.08	4.32	4.80	5.04	5.28	5.76	6.00	6.71	7.19	7.67	8.63	10.07	
80	4.48	4.80	5.12	5.44	5.76	6.39	6.71	7.03	7.67	7.99	8.95	9.59	10.23	11.51	13.42	
90	5.04	5.40	5.76	6.12	6.47	7.19	7.55	7.91	8.63	8.99	10.07	10.79	11.51	12.94	15.10	
100	5.60	6.00	6.39	6.79	7.19	7.99	8.39	8.79	9.59	9.99	11.19	11.99	12.79	14.38	16.77	
200	11.19	11.99	12.78	13.58	14.38	15.98	16.78	17.57	19.17	19.96	22.35	23.94	25.53	28.71	33.47	
300	16.78	17.97	19.17	20.36	21.56	23.94	25.14	26.33	28.71	29.90	33.47	35.84	38.21	42.94	49.99	
400	22.35	23.94	25.53	27.12	28.71	31.88	33.47	35.05	38.21	39.79	44.51	47.65	50.78	57.01	66.27	
500	27.92	29.90	31.88	33.86	35.84	39.79	41.76	43.72	47.64	49.60	55.45	59.33	63.20	70.87	82.22	
600	33.47	35.84	38.21	40.58	42.94	47.64	49.99	52.34	57.00	59.33	66.27	70.87	75.43	84.47	97.76	
700	39.00	41.76	44.51	47.26	49.99	55.45	58.17	60.88	66.27	68.96	76.95	82.22	87.45	97.76	112.80	
800	44.51	47.65	50.77	53.90	57.01	63.19	66.27	69.34	75.43	78.46	87.45	93.36	99.21	110.68	127.26	
900	49.99	53.51	57.00	60.49	63.97	70.87	74.29	77.70	84.47	87.82	97.75	104.27	110.68	123.19	141.06	
1000	55.45	59.33	63.19	67.04	70.87	78.46	82.22	85.96	93.36	97.03	107.84	114.90	121.82	135.23	154.11	
1100	60.88	65.12	69.34	73.54	77.70	85.96	90.05	94.10	102.11	106.06	117.68	125.23	132.60	146.75	166.35	
1200	66.27	70.87	75.43	79.97	84.47	93.36	97.76	102.11	110.68	114.90	127.26	135.23	142.97	157.70	177.67	
1300	71.63	76.57	81.47	86.34	91.16	100.66	105.35	109.97	119.07	123.53	136.53	144.87	152.91	168.02	188.00	
1400	76.95	82.22	87.45	92.63	97.76	107.84	112.80	117.69	127.26	131.94	145.49	154.12	162.37	177.67	197.26	
1500	82.22	87.82	93.36	98.85	104.27	114.90	120.11	125.23	135.23	140.10	154.11	162.94	171.32	186.69	205.36	
1600	87.45	93.36	99.21	104.99	110.68	121.82	127.26	132.60	142.97	148.00	162.36	171.31	179.72	194.73	212.22	
1700	92.63	98.85	104.98	111.04	116.99	128.60	134.25	139.78	150.46	155.62	170.22	179.21	187.53	202.03	217.76	
1800	97.76	104.27	110.68	116.99	123.19	135.23	141.06	146.75	157.70	162.94	177.67	186.59	194.73	208.45	221.89	
1900	102.83	109.62	116.29	122.85	129.27	141.70	147.69	153.51	164.65	169.95	184.67	193.43	201.26	213.94	224.54	
2000	107.85	114.90	121.82	128.61	135.23	147.99	154.12	160.05	171.31	176.63	191.21	199.69	207.11	218.44	225.62	
2100	112.80	120.10	127.26	134.25	141.06	154.11	160.34	166.35	177.67	182.96	197.25	205.36	212.22	221.89		
2200	117.69	125.23	132.60	139.78	146.75	160.05	166.35	172.40	183.70	188.93	202.79	210.39	216.56	224.26		
2300	122.51	130.27	137.83	145.19	152.30	165.78	172.13	178.18	189.39	194.51	207.78	214.76	220.10	225.47		
2400	127.26	135.23	142.97	150.47	157.70	171.31	177.67	183.70	194.72	199.69	212.22	218.43	222.80	225.50		
2500	131.94	140.10	147.99	155.62	162.94	176.63	182.97	188.93	199.69	204.46	216.06	221.39	224.63			
2600	136.54	144.87	152.90	160.63	168.02	181.82	188.00	193.86	204.27	208.78	219.29	223.59	225.54			
2700	141.06	149.54	157.70	165.51	172.93	186.58	192.77	198.49	208.45	212.66	221.89	225.01	225.50			
2800	145.50	154.12	162.36	170.23	177.67	191.21	197.26	202.79	212.22	216.06	223.83	225.82				
2900	149.85	158.58	166.90	174.80	182.22	195.58	201.46	206.76	215.55	218.98	225.08					
3000	154.12	162.94	171.31	179.21	186.59	199.69	205.36	210.39	218.43	221.39	225.62					
3100	158.29	167.19	175.58	183.46	190.76	203.53	208.95	213.66	220.86	223.28						
3200	162.37	171.31	179.71	187.53	194.73	207.10	212.22	216.56	222.80	224.63						
3300	166.35	175.32	183.70	191.44	198.49	210.39	215.16	219.09	224.25	225.42						
3400	170.23	179.21	187.53	195.16	202.03	213.37	217.76	221.22	225.20	225.63						
3500	174.00	182.96	191.21	198.69	205.36	216.06	220.01	222.94	225.62							
3600	177.67	186.59	194.72	202.04	208.45	218.43	221.89	224.26								
3700	181.23	190.08	198.08	205.18	211.32	220.49	223.41	225.14								
3800	184.67	193.43	201.26	208.12	213.94	222.21	224.54	225.58								
3900	188.00	196.63	204.27	210.86	216.31	223.59	225.28	225.58								
4000	191.21	199.69	207.10	213.38	218.44	224.63	225.62									
4100	194.30	202.60	209.75	215.68	220.30	225.30										
4200	197.26	205.36	212.22	217.76	221.89	225.62										
4300	200.09	207.95	214.49	219.61	223.21											
4400	202.79	210.39	216.56	221.22	224.26											
4500	205.36	212.66	218.43	222.59	225.01											
4600	207.79	214.76	220.10	223.71	225.47											
4700	210.08	216.68	221.56	224.58	225.64											
4800	212.22	218.43	222.80	225.20												
4900	214.22	220.00	223.83	225.55												
5000	216.06	221.39	224.63	225.63												

\*Because the durability in terms of hours decreases in the □□□□ marked range, this range should be avoided whenever possible.  
\*The circumferential speed of pulley is 33 (m/s) or more in the □□□□ marked range; a dynamic balance for the pulley is essential.  
\*The □□□□ marked range should be avoided whenever possible, as above two factors overlap here.\*Values in the table above is for nominal belt width 120 (120mm). For other belt widths, these values should be multiplied by the width correction coefficient in Table 28.

**Table 41. Reference Transmission Capacity of MTS8M  
Ps – Belt Width 60mm – (kW)**

Rotary Speed of Small Pulley (rpm)	Number of Teeth of the Pulley (T)																
	24	26	28	30	32	34	36	38	40	42	44	46	48	50	60	72	84
	Pitch Dia. (mm)																
	61.12	66.21	71.30	76.39	81.49	86.58	91.67	96.77	101.86	106.95	112.05	117.14	122.23	127.32	152.79	183.35	213.90
50	1.35	1.47	1.58	1.70	1.82	1.93	2.05	2.17	2.27	2.37	2.46	2.56	2.66	2.75	3.21	3.75	4.27
100	2.71	2.94	3.17	3.40	3.63	3.87	4.11	4.35	4.54	4.74	4.93	5.12	5.31	5.50	6.42	7.50	8.54
200	4.91	5.32	5.73	6.15	6.57	6.99	7.42	7.85	8.20	8.54	8.89	9.22	9.56	9.89	11.52	13.41	15.23
300	6.91	7.48	8.06	8.64	9.23	9.83	10.43	11.04	11.52	12.00	12.47	12.94	13.41	13.87	16.12	18.71	21.20
400	8.77	9.50	10.23	10.98	11.73	12.48	13.25	14.02	14.63	15.23	15.82	16.41	16.99	17.57	20.38	23.62	26.72
500	10.53	11.40	12.29	13.18	14.08	14.99	15.92	16.85	17.57	18.28	18.99	19.69	20.38	21.07	24.40	28.22	31.88
600	12.20	13.22	14.24	15.28	16.33	17.39	18.46	19.55	20.38	21.20	22.02	22.82	23.62	24.40	28.22	32.59	36.76
700	13.80	14.95	16.11	17.29	18.48	19.69	20.91	22.15	23.09	24.01	24.92	25.82	26.72	27.60	31.88	36.76	41.39
800	15.32	16.61	17.91	19.23	20.56	21.91	23.28	24.66	25.70	26.72	27.72	28.72	29.70	30.68	35.39	40.74	45.81
900	16.79	18.21	19.64	21.09	22.56	24.05	25.56	27.10	28.22	29.34	30.44	31.52	32.59	33.65	38.77	44.57	50.04
1000	18.21	19.75	21.31	22.89	24.50	26.13	27.78	29.46	30.68	31.88	33.06	34.23	35.39	36.53	42.03	48.25	54.09
1100	19.57	21.24	22.92	24.64	26.38	28.14	29.94	31.76	33.06	34.35	35.62	36.87	38.10	39.32	45.19	51.80	57.98
1200	20.89	22.67	24.48	26.33	28.20	30.10	32.04	34.00	35.39	36.76	38.10	39.43					



Selection is easy with Timing Pulleys and Belts automatic calculation tool available at:  
[http://fawos.misumi.jp/FA\\_WEB/pulley\\_us/](http://fawos.misumi.jp/FA_WEB/pulley_us/)

**Table 42. Reference Transmission Capacity of P2M Ps – Belt Width 4mm –**

(W)

Rotary Speed of Small Pulley(rpm)	No. of Teeth of Small Pulley Diameter of the Pitch Circle(mm)	14	15	16	18	20	22	24	25	26	28	30	32	34	36	40	42	44	48
		8.91	9.55	10.19	11.46	12.73	14.01	15.28	15.92	16.55	17.83	19.10	20.37	21.65	22.92	25.46	26.74	28.01	30.56
100		2	2	2	2	3	3	3	3	3	4	4	5	5	6	7	7	8	9
200		3	3	4	5	5	6	7	7	7	8	9	10	11	11	13	14	15	17
400		6	6	7	8	9	10	11	12	13	14	15	16	17	19	22	24	25	28
600		8	9	10	11	12	14	16	17	18	19	20	22	23	25	29	31	33	37
800		10	11	12	13	16	18	19	20	21	23	25	27	29	31	36	38	41	46
1000		12	13	14	16	18	20	23	24	25	27	30	32	34	37	42	45	48	54
1200		14	15	16	19	21	23	26	26	28	31	34	37	40	42	48	51	54	61
1400		16	17	18	21	24	26	29	30	32	35	38	41	44	47	54	57	61	68
1450		16	18	19	21	24	27	30	31	33	36	39	42	45	48	55	59	62	70
1500		16	18	19	22	25	28	31	32	34	37	40	43	46	50	57	60	64	71
1600		17	18	20	23	26	29	32	33	35	39	43	46	49	53	60	64	67	75
1750		19	20	22	25	28	31	35	37	38	42	45	49	53	56	64	68	71	79
1800		19	21	23	25	29	32	35	37	38	42	46	50	54	57	65	69	73	81
2000		21	22	24	28	31	34	38	40	42	46	50	54	58	62	70	74	78	87
2400		24	26	28	32	36	40	44	46	48	52	56	61	65	70	80	85	89	99
3000			30	32	37	42	46	52	54	57	62	67	72	77	82	93	98	102	115
3600			35	38	43	48	53	59	62	64	70	76	82	88	94	106	112	118	131
4000			38	41	47	52	58	64	67	70	76	82	88	94	101	114	120	127	140
5000				48	55	61	68	75	78	82	89	96	104	111	118	132	139	147	162
6000				55	63	70	78	86	90	93	101	109	117	125	133	149	157	164	180
8000					76	86	95	105	109	114	123	132	141	150	158	176	184	192	209
10000					91	101	111	122	127	132	142	151	161	170	178	196	203	210	224
12000						114	125	136	141	146	157	166	175	183	190	206	211	217	228
14000						125	136	148	153	158	168	176	185	190	196	208	214	220	232

\*Because the durability in terms of hours decreases in the [ ] marked range, this range should be avoided whenever possible. For other belt widths, values above should be multiplied by the width correction coefficient shown in Table 28.

**Table 43. Reference Transmission Capacity of P3M Ps – Belt Width 6mm –**

(W)

Rotary Speed of Small Pulley(rpm)	No. of Teeth of Small Pulley Diameter of the Pitch Circle(mm)	10	12	14	15	16	18	20	22	24	25	26	28	30	32	34	36	40	42
		9.55	11.46	13.37	14.32	15.28	17.19	19.10	20.01	22.92	23.87	24.83	26.74	28.65	30.56	32.47	34.38	38.20	40.11
100		4	5	6	6	7	8	9	10	12	12	13	14	15	17	19	20	22	23
200		8	11	12	13	14	16	18	20	23	24	25	28	31	34	36	38	45	47
400		14	17	20	22	24	27	32	35	39	41	43	47	51	56	61	65	75	79
600		19	23	28	30	33	37	42	47	53	55	58	63	69	75	81	87	100	105
800		24	29	35	38	41	46	53	59	65	68	72	79	85	92	99	107	123	129
1000		28	35	41	44	48	55	62	69	77	81	84	92	100	109	118	126	144	151
1200		33	40	47	51	55	63	71	79	88	92	97	106	115	125	135	144	164	172
1400		37	45	54	58	62	71	80	89	99	104	109	119	129	140	151	162	184	193
1450		38	46	55	59	64	72	82	90	102	106	111	122	133	144	155	166	188	197
1500		39	47	56	60	65	75	84	93	104	109	114	125	135	147	158	170	193	202
1600		41	49	59	63	68	79	88	98	109	114	120	131	142	154	166	178	202	212
1750		44	54	63	68	74	84	95	106	118	124	129	141	153	165	177	190	215	226
1800			55	65	70	75	86	97	108	120	126	131	143	155	168	181	193	219	230
2000			59	70	75	81	93	105	117	129	135	142	155	168	182	196	209	237	249
2400			68	81	87	93	107	121	134	148	155	162	177	192	207	223	238	270	284
3000				95	103	112	125	142	158	175	183	191	208	226	243	261	279	316	332
3600				110	118	127	145	163	182	201	210	219	238	258	278	298	318	359	377
4000				119	128	138	158	176	196	216	226	236	257	278	299	321	342	386	405
5000				141	152	163	186	208	231	255	267	278	302	326	351	375	399	448	470
6000					174	187	212	238	264	291	304	317	343	370	397	424	451	505	530
8000						232	263	293	324	356	371	387	418	448	479	508	538	597	627
10000							308	342	377	413	430	446	480	512	545	574	604	663	696
12000							349	386	423	460	477	495	530	562	594	620	646	699	734
14000								424	462	500	517	534	568	597	626	645	665	704	739

\*Because the durability in terms of hours decreases in the [ ] marked range, this range should be avoided whenever possible. For other belt widths, values above should be multiplied by the width correction coefficient shown in Table 28.



## Technical Data

### Selection of Timing Belts 7 – Transmission Capacity Table –

Table 44. Reference Transmission Capacity of P5M Ps – Belt Width 10 mm –

(W)

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley		Diameter of the Pitch Circle (mm)																
	12	14	16	18	20	22	24	25	26	28	30	32	34	36	40	42	44	48	56
	19.10	22.28	25.46	28.65	31.83	35.05	38.20	39.79	41.38	44.56	47.75	50.93	54.11	57.30	63.66	66.85	70.03	76.39	89.15
100	23	26	31	35	41	46	52	55	58	64	70	76	81	86	103	110	118	133	158
200	46	53	63	72	81	92	104	109	115	126	138	151	164	177	205	220	235	267	316
400	77	90	106	122	138	155	173	182	192	211	231	251	272	294	337	361	385	434	514
600	105	123	144	165	188	211	235	247	259	284	310	337	365	394	452	482	513	577	684
800	131	153	179	205	234	262	291	306	322	353	385	417	451	485	556	592	629	706	837
1000	156	182	212	243	276	309	343	361	379	415	453	491	530	570	651	694	738	825	977
1200	179	209	244	280	316	355	394	414	435	476	518	561	605	650	742	790	838	937	1110
1400	201	235	274	319	355	399	443	465	487	532	580	628	677	726	828	880	933	1040	1230
1450		242	282	323	365	409	453	476	499	546	594	643	694	745	850	903	957	1070	1260
1500		248	288	333	374	420	466	489	512	560	609	659	711	762	869	925	981	1090	1290
1600		261	303	348	393	441	489	514	538	588	639	691	745	799	910	970	1030	1140	1350
1750		278	325	372	420	471	522	548	575	628	683	738	795	852	970	1040	1100	1220	1430
1800			332	380	430	481	532	559	586	640	696	753	810	868	989	1050	1110	1240	1460
2000			360	412	465	520	576	605	633	691	751	812	874	937	1060	1130	1200	1330	1570
2400			413	472	532	595	658	691	723	789	857	925	992	1060	1210	1280	1350	1500	2030
3000				557	628	701	775	812	850	926	1000	1080	1150	1240	1400	1485	1570	1730	2120
3600				638	719	801	883	925	966	1050	1140	1230	1310	1400	1580	1670	1760	1940	2250
4000					776	865	953	997	1040	1130	1220	1320	1450	1500	1690	1785	1880	2060	2380
5000					911	1010	1110	1160	1210	1320	1420	1520	1620	1720	1920	2010	2110	2300	2610
6000					1140	1260	1310	1370	1480	1580	1690	1790	1900	2100	2190	2290	2460	2720	
8000						1490	1550	1600	1720	1830	1930	2020	2120	2270	2330	2400	2480	2480	
10000							1710	1760	1860	1940	2020	2080	2130	2170	2160	2150	2040		
12000								1770	1810	1880	1910	1940	1920	1900					
14000									1750	1760	1710	1660							

\*Because the durability in terms of hours decreases in the [ ] marked range, this range should be avoided whenever possible.  
For other belt widths, values above should be multiplied by the width correction coefficient shown in Table 28.



Selection is easy with Timing Pulleys and Belts automatic calculation tool available at:  
[http://fawos.misumi.jp/FA\\_WEB/pulley\\_us/](http://fawos.misumi.jp/FA_WEB/pulley_us/)

Table 45. Reference Transmission Capacity of P8M Ps – Belt Width 15 mm –

(kW)

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley Diameter of the Pitch Circle (mm)	20	22	24	26	28	30	32	34	36	38	40	44	48	50	56	60	64	72
		50.93	56.02	61.12	66.21	71.30	76.39	81.49	86.58	91.67	96.77	101.86	112.05	122.23	127.32	142.06	152.79	162.97	183.35
100		0.16	0.17	0.19	0.21	0.23	0.26	0.31	0.41	0.44	0.48	0.51	0.56	0.60	0.63	0.70	0.74	0.78	0.89
200		0.32	0.35	0.39	0.42	0.45	0.50	0.59	0.69	0.78	0.85	0.91	0.99	1.07	1.14	1.23	1.35	1.40	1.57
400		0.65	0.71	0.77	0.84	0.90	0.95	1.09	1.25	1.37	1.48	1.59	1.72	1.86	1.94	2.16	2.30	2.43	2.71
600		0.96	1.06	1.16	1.25	1.35	1.45	1.53	1.70	1.86	2.02	2.17	2.37	2.55	2.66	2.95	3.12	3.30	3.66
800		1.29	1.41	1.54	1.67	1.80	1.93	2.06	2.18	2.31	2.51	2.69	3.02	3.16	3.27	3.64	3.83	4.08	4.75
870		1.40	1.54	1.68	1.82	1.96	2.10	2.24	2.38	2.51	2.66	2.86	3.16	3.36	3.48	3.90	4.13	4.44	4.98
1000		1.61	1.77	1.93	2.09	2.25	2.41	2.57	2.73	2.89	2.99	3.16	3.64	3.84	4.00	4.47	4.78	5.09	5.71
1160		1.86	2.05	2.24	2.42	2.61	2.79	2.98	3.16	3.35	3.53	3.84	4.08	4.44	4.62	5.17	5.52	6.48	7.28
1200		1.93	2.12	2.31	2.51	2.70	2.89	3.07	3.27	3.46	3.60	3.82	4.22	4.59	4.78	5.34	5.71	6.08	7.52
1400		2.25	2.45	2.70	2.94	3.15	3.37	3.59	3.80	4.03	4.25	4.47	4.90	5.34	5.55	6.20	6.62	7.04	8.68
1450		2.33	2.55	2.79	3.04	3.26	3.65	3.72	3.94	4.17	4.40	4.63	5.07	5.53	5.75	6.41	6.85	7.28	8.96
1500		2.41	2.64	2.89	3.15	3.37	3.72	3.84	4.07	4.31	4.55	4.78	5.25	5.71	5.94	6.62	7.07	7.51	9.25
1600		2.57	2.83	3.07	3.35	3.59	3.84	4.09	4.34	4.59	4.84	5.09	5.59	6.08	6.32	7.04	7.52	7.98	9.81
1750		2.81	3.08	3.36	3.64	3.92	4.20	4.47	4.74	5.01	5.28	5.56	6.09	6.63	6.88	7.68	8.17	8.70	10.6
1800		2.89	3.18	3.72	3.75	4.03	4.31	4.59	4.87	5.15	5.43	5.71	6.26	6.80	7.07	7.86	8.38	8.90	10.9
2000		3.20	3.52	4.01	4.15	4.47	4.78	5.09	5.40	5.71	6.01	6.32	6.93	7.52	7.81	8.68	9.24	9.81	11.9
2400		3.84	4.22	4.59	4.97	5.34	5.71	6.08	6.44	6.80	7.16	7.52	8.22	9.05	9.24	9.86	10.9	11.5	13.8
3000		4.63	5.20	5.62	6.02	6.52	6.81	7.32	7.76	8.22	8.71	9.02	9.84	10.7	11.1	12.2	12.6	12.9	14.6
3600			5.82	6.34	6.75	7.27	7.67	8.17	8.65	9.14	9.72	10.0	10.8	11.7	12.2	13.1	13.9	13.9	15.3
4000				7.06	7.48	8.14	8.46	9.00	9.60	10.0	10.7	11.0	11.7	12.7	13.2	14.0	14.7	14.9	15.8
5000					8.81	9.60	10.2	10.7	11.3	11.7	12.4	12.8	13.6	14.5	14.8	15.7			
6000					10.2	11.2	11.9	12.3	13.0	13.2	14.1	14.5	14.9	15.8	16.0				

\*Because the durability in terms of hours decreases in the [ ] marked range, this range should be avoided whenever possible.  
 For other belt widths, values above should be multiplied by the width correction coefficient shown in Table 28.

\* [ ] The circumferential speed of pulley is 33 (m/s) or more; a dynamic balance for the pulley is essential.



# Technical Data

## Selection of Timing Belts 8 – Transmission Capacity Table –

Table 46. Reference Transmission Capacity of UP5M Ps – Belt Width 10 mm –

(W)

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley		Diameter of the Pitch Circle (mm)																
	12	14	16	18	20	22	24	26	28	30	32	36	40	44	48	50	60	72	
	19.10	22.28	25.46	28.65	31.83	35.01	38.20	41.38	44.56	47.75	50.93	57.30	63.66	70.03	76.39	79.58	95.49	114.59	
20	10	12	15	17	19	21	24	26	29	31	34	39	45	51	58	61	78	101	
40	19	23	28	32	36	40	45	49	54	59	64	74	85	96	108	114	147	187	
60	27	32	39	45	50	56	63	69	76	83	90	104	119	135	152	161	206	267	
100	41	50	60	69	78	88	97	107	118	128	139	162	185	210	236	249	321	420	
200	76	92	111	128	145	162	180	198	215	237	257	298	342	388	436	460	592	774	
400	141	170	206	236	267	299	332	366	401	437	474	550	631	715	804	849	1092	1430	
500	172	207	251	287	325	364	405	446	488	532	577	670	769	871	979	1034	1330	1741	
600	202	243	295	338	382	428	475	524	574	625	678	788	903	1024	1151	1216	1563	2045	
800	260	314	380	436	492	552	613	675	740	806	875	1016	1164	1320	1483	1567	2016	2637	
1000	316	382	463	531	600	672	747	822	901	982	1065	1238	1418	1609	1806	1909	2454	3210	
1200	376	453	550	630	713	799	887	977	1070	1167	1265	1470	1685	1910	2146	2266	2913	3811	
1400	436	526	637	730	826	924	1026	1132	1240	1351	1466	1702	1951	2212	2484	2625	3372	4409	
1450		544	658	755	854	957	1061	1171	1283	1397	1516	1760	2017	2288	2569	2714	3488	4559	
1500		561	681	780	883	988	1098	1209	1324	1444	1566	1819	2084	2364	2654	2803	3601	4707	
1600		599	724	831	940	1052	1169	1287	1410	1537	1667	1935	2218	2514	2823	2984	3833	5007	
1750		652	790	907	1025	1147	1275	1405	1539	1677	1817	2111	2420	2743	3080	3254	4178	5455	
1800			813	931	1053	1179	1309	1443	1582	1724	1868	2171	2486	2820	3165	3344	4293	5605	
2000			902	1032	1169	1309	1453	1601	1754	1912	2071	2407	2757	3124	3508	3707	4687	6201	
2400			1068	1222	1386	1552	1720	1897	2077	2262	2453	2849	3261	3695	4146	4378	5485	7293	
3000				1517	1714	1918	2130	2348	2570	2798	3034	3520	4027	4559	5108	5389	6614	8885	
3600				1794	2029	2272	2519	2774	3039	3307	3584	4151	4743	5361	5996	6320	7629	10250	
4000					2245	2513	2785	3067	3358	3655	3956	4577	5226	5895	6583	6932	8040	11069	
5000					2747	3072	3404	3747	4090	4446	4807	5542	6301	7066	7843	8229	9048		
6000					3217	3585	3969	4359	4757	5154	5559	6376	7185	7995	8776	9159			
8000						5002	5455	5908	6361	6795	7624	8366	8993	9465	9619				
10000							6313	6747	7156	7518	8072	8349	8253						
12000							6824	7142	7359	7475	7316								
14000							6848	6882	6730										

\*Because the durability in terms of hours decreases in the [---] marked range, this range should be avoided whenever possible.  
For other belt widths, values above should be multiplied by the width correction coefficient shown in Table 28.



Selection is easy with Timing Pulleys and Belts automatic calculation tool available at:  
[http://fawos.misumi.jp/FA\\_WEB/pulley\\_us/](http://fawos.misumi.jp/FA_WEB/pulley_us/)

Table 47. Reference Transmission Capacity of UP8M Ps – Belt Width 15mm –

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley Diameter of the Pitch Circle (mm)	(kW)																	
		20	22	24	26	28	30	32	34	36	38	40	44	48	50	56	60	64	72
20		0.11	0.12	0.13	0.14	0.15	0.17	0.18	0.19	0.20	0.21	0.23	0.25	0.28	0.29	0.33	0.36	0.40	0.46
40		0.19	0.21	0.24	0.26	0.28	0.30	0.33	0.36	0.38	0.40	0.42	0.47	0.52	0.55	0.62	0.67	0.73	0.84
60		0.27	0.31	0.34	0.37	0.40	0.44	0.47	0.50	0.53	0.56	0.60	0.67	0.74	0.77	0.89	0.96	1.04	1.20
100		0.43	0.48	0.52	0.57	0.62	0.67	0.71	0.77	0.82	0.88	0.93	1.03	1.14	1.20	1.38	1.50	1.62	1.87
200		0.76	0.84	0.93	1.01	1.10	1.19	1.28	1.37	1.46	1.57	1.69	1.85	2.06	2.16	2.48	2.70	2.93	3.40
300		1.06	1.17	1.29	1.41	1.54	1.66	1.78	1.92	2.05	2.18	2.29	2.59	2.88	3.03	3.48	3.79	4.11	4.79
400		1.32	1.47	1.62	1.78	1.93	2.09	2.25	2.41	2.59	2.75	2.92	3.28	3.65	3.84	4.41	4.81	5.22	6.08
500		1.57	1.75	1.93	2.12	2.30	2.50	2.69	2.89	3.09	3.30	3.50	3.93	4.37	4.60	5.30	5.78	6.29	7.32
600		1.81	2.01	2.22	2.44	2.65	2.88	3.10	3.33	3.57	3.80	4.05	4.54	5.06	5.32	6.14	6.71	7.29	8.51
700		2.04	2.26	2.50	2.75	2.99	3.24	3.50	3.75	4.02	4.29	4.57	5.13	5.72	6.02	6.95	7.59	8.26	9.65
800		2.25	2.51	2.77	3.04	3.31	3.59	3.87	4.17	4.46	4.76	5.07	5.70	6.35	6.69	7.73	8.45	9.20	10.75
900		2.46	2.74	3.03	3.32	3.61	3.92	4.24	4.55	4.88	5.21	5.55	6.25	6.97	7.34	8.48	9.29	10.11	11.83
1000		2.66	2.96	3.28	3.58	3.91	4.24	4.58	4.93	5.28	5.64	6.02	6.78	7.56	7.96	9.22	10.08	10.99	12.88
1100		2.86	3.19	3.52	3.87	4.23	4.59	4.95	5.33	5.71	6.10	6.51	7.32	8.18	8.62	9.99	10.93	11.91	13.97
1200		3.06	3.42	3.78	4.15	4.53	4.92	5.31	5.72	6.13	6.55	6.98	7.87	8.79	9.26	10.74	11.76	12.83	15.05
1300		3.26	3.64	4.02	4.42	4.82	5.24	5.67	6.10	6.54	6.99	7.45	8.40	9.40	9.90	11.49	12.59	13.73	16.11
1400		3.46	3.86	4.27	4.69	5.12	5.57	6.01	6.47	6.95	7.43	7.92	8.94	9.99	10.53	12.23	13.40	14.62	17.17
1450		3.55	3.96	4.39	4.82	5.26	5.72	6.18	6.66	7.15	7.64	8.15	9.20	10.28	10.84	12.59	13.80	15.06	17.69
1500		3.65	4.07	4.51	4.95	5.41	5.87	6.35	6.85	7.35	7.85	8.38	9.46	10.58	11.15	12.95	14.20	15.50	18.22
1600		3.83	4.27	4.73	5.21	5.69	6.18	6.69	7.21	7.74	8.28	8.84	9.98	11.16	11.77	13.68	15.00	16.37	19.26
1750		4.11	4.59	5.08	5.59	6.12	6.64	7.19	7.75	8.32	8.91	9.50	10.74	12.03	12.69	14.75	16.19	17.68	20.81
1800		4.19	4.69	5.20	5.71	6.25	6.79	7.35	7.92	8.52	9.11	9.72	11.00	12.31	12.99	15.10	16.58	18.11	21.32
2000		4.56	5.09	5.65	6.21	6.79	7.39	8.00	8.63	9.28	9.93	10.61	11.99	13.44	14.18	16.51	18.14	19.82	23.37
2400		5.25	5.87	6.51	7.17	7.85	8.54	9.27	10.00	10.75	11.52	12.31	13.95	15.65	16.53	19.27	21.20	23.18	27.38
2800		5.91	6.61	7.34	8.09	8.87	9.66	10.48	11.32	12.18	13.06	13.97	15.84	17.81	18.81	21.97	24.19	26.49	31.35
3000		6.22	6.97	7.75	8.54	9.37	10.21	11.09	11.97	12.89	13.82	14.79	16.78	18.87	19.94	23.31	25.68	28.13	33.30
3600		6.93	7.79	8.66	9.56	10.49	11.45	12.44	13.46	14.50	15.57	16.66	18.94	21.33	22.56	26.44	29.15	31.97	37.94
4000		7.36	8.29	9.20	10.18	11.18	12.20	13.27	14.36	15.48	16.63	17.81	20.27	22.85	24.18	28.37	31.30	34.36	40.81
5000		8.29	9.34	10.41	11.52	12.68	13.87	15.10	16.38	17.68	19.02	20.40	23.26	26.29	27.84	32.75	36.20		
6000		9.05	9.05	11.41	12.65	13.95	15.28	16.66	18.08	19.55	21.06	22.61	25.85	29.24	31.02	36.56	40.46		

\*Because the durability in terms of hours decreases in the [ ] marked range, this range should be avoided whenever possible.  
 For other belt widths, values above should be multiplied by the width correction coefficient shown in Table 28.

\* [ ] The circumferential speed of pulley is 33(m/s) or more; a dynamic balance for the pulley is essential.



## Technical Data

### Selection of Timing Belts 9 – Transmission Capacity Table –

Table 48. Reference Transmission Capacity of T5 Ps -Belt Width 10mm-

(W)

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley Diameter of the Pitch Circle (mm)	12	14	16	18	20	22	24	28	30
		19.10	22.28	25.46	28.65	31.83	35.01	38.20	44.56	47.75
1160		98.5	114.9	131.3	147.7	164.1	180.5	196.9	229.7	246.1
1750		134.3	156.7	179.1	201.5	223.9	246.3	268.7	313.5	335.9
3500		222.5	259.6	296.7	333.7	370.8	407.9	445.0	519.1	556.2
100		10.7	12.4	14.2	16.0	17.8	19.5	21.3	24.9	26.6
200		20.8	24.3	27.7	31.2	34.7	38.2	41.6	48.6	52.0
300		30.5	35.6	40.7	45.7	50.8	55.9	61.0	71.2	76.2
400		39.7	46.4	53.0	59.6	66.2	72.9	79.5	92.7	99.4
500		48.6	56.7	64.8	72.9	81.0	89.1	97.2	113.4	121.5
600		57.0	66.5	76.0	85.6	95.1	104.6	114.1	133.1	142.6
700		65.1	76.0	86.8	97.7	108.6	119.4	130.3	152.0	162.8
800		72.9	85.0	97.2	109.3	121.5	133.6	145.8	170.1	182.2
900		80.3	93.7	107.1	120.5	133.9	147.3	160.7	187.5	200.9
1000		87.5	102.1	116.7	131.3	145.9	160.5	175.0	204.2	218.8
1100		94.4	110.2	125.9	141.6	157.4	173.1	188.9	220.3	236.1
1200		101.1	117.9	134.8	151.6	168.5	185.3	202.2	235.9	252.7
1300		107.5	125.5	143.4	161.3	179.2	197.2	215.1	250.9	268.9
1400		113.8	132.8	151.7	170.7	189.7	208.6	227.6	265.5	284.5
1500		119.9	139.8	159.8	179.8	200.0	219.2	239.7	279.7	299.7
1600		125.8	146.7	167.7	188.6	209.6	230.6	251.5	293.4	314.4
1700		131.5	153.4	175.4	197.3	219.2	241.1	263.0	306.9	328.8
1800		137.1	160.0	182.9	205.7	228.6	251.4	274.3	320.0	342.8
1900		142.6	166.4	190.2	214.0	237.7	261.5	285.3	332.8	356.6
2000		148.0	172.7	197.4	222.1	246.7	271.4	296.1	345.4	370.1
2200		158.6	185.0	211.4	237.8	264.3	290.7	317.8	370.0	396.4
2400		168.8	196.9	225.1	253.2	281.4	309.5	337.6	393.9	422.0
2600		178.8	208.7	238.5	268.3	298.1	327.9	357.7	417.3	447.1
2800		188.7	220.2	251.6	283.1	314.5	346.0	377.4	440.4	471.8
3000		198.5	231.6	264.6	297.7	330.8	363.9	397.0	463.1	496.2
3200		208.2	242.8	277.5	312.2	346.9	381.6	416.3	485.7	520.4
3400		217.7	254.0	290.3	326.6	362.9	399.2	435.5	508.0	544.3
3600		227.2	265.1	303.0	340.8	378.7	416.6	454.4	530.2	568.1
3800		236.6	276.0	315.5	354.9	394.3	433.8	473.2	552.1	591.5
4000		245.8	286.8	327.7	368.7	409.7	450.7	491.6	573.6	614.5
4200		254.8	297.3	339.7	382.2	424.7	467.2	509.6	594.6	637.0
4400		263.5	307.4	351.4	395.3	439.2	483.1	527.1	614.9	658.8
4600		271.9	317.2	362.5	407.8	453.1	498.4	543.7	634.4	679.7
4800		279.7	326.4	373.0	419.6	466.2	512.8	559.5	652.7	699.3
5000		287.0	334.8	382.7	430.5	478.3	526.2	574.0	669.7	717.5
5500				402.2	452.4	502.7	553.0	603.2	703.8	754.1
6000				412.1	463.6	515.1	566.6	618.1	721.1	772.6
6500				408.2	459.2	510.2	561.2	612.2	714.3	765.3
7000				385.3	433.5	481.-7	529.8	578.0	674.3	722.5
7500				337.7	379.9	422.1	464.3	506.6	591.0	633.2
8000					290.8	323.1	355.5	387.8	452.4	484.7
8500					157.7	175.3	192.8	210.3	245.4	262.9

\*Avoiding the [ ] marked ranges is recommended as endurance time is shorten

\*The above table shows values for the nominal width 10 (10mm). Multiply a value in the table by correction coefficient Kb in the table 28 for other widths.



Selection is easy with Timing Pulleys and Belts automatic calculation tool available at:  
[http://fawos.misumi.jp/FA\\_WEB/pulley\\_us/](http://fawos.misumi.jp/FA_WEB/pulley_us/)

Table 49. Reference Transmission Capacity of T10 Ps - Belt Width 10mm-

(W)

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley Diameter of the Pitch Circle (mm)	12	14	16	18	20	22	24	26	28	30	32	36	40	44	48
		38.20	44.56	50.93	57.30	63.66	70.03	76.39	82.76	89.12	95.49	101.86	114.59	127.32	140.06	152.79
870		254.9	297.4	339.9	382.4	424.9	467.4	509.9	552.4	594.9	637.4	679.8	764.8	849.8	938.8	1019.8
1160		321.2	374.8	428.3	481.8	535.4	588.9	642.4	696.0	749.5	803.0	856.6	963.7	1070.7	1177.8	1284.9
1750		438.3	511.3	584.4	657.4	730.5	803.5	876.6	949.6	1022.7	1095.7	1168.8	1314.9	1461.0	1607.1	1753.2
3500		725.8	846.8	967.8	1088.7	1209.7	1330.6	1451.6	1572.6	1693.6	1814.6	1935.5	2177.5	2419.4	2661.4	2903.3
100		34.8	40.6	46.4	52.1	57.9	63.7	69.5	75.3	81.1	86.9	92.7	104.3	115.9	127.5	139.1
200		67.9	79.2	90.5	101.9	113.2	124.5	135.8	147.1	158.4	169.8	181.1	203.7	226.3	249.0	271.6
300		99.5	116.1	132.7	149.3	165.8	182.4	199.0	215.6	232.2	248.8	265.3	298.5	331.7	364.9	398.0
400		129.7	151.3	172.9	194.5	216.1	237.7	259.4	281.0	302.6	324.2	345.8	389.0	432.3	475.5	518.7
500		158.5	184.9	211.3	237.8	264.2	290.6	317.0	343.4	369.8	396.3	422.7	475.5	528.3	581.2	634.0
600		186.1	217.1	248.1	279.1	310.1	341.1	372.2	403.2	434.2	465.2	496.2	558.2	620.3	682.3	744.3
700		212.5	247.9	283.3	318.7	354.2	389.6	425.0	460.4	495.8	531.2	566.6	637.5	708.3	779.1	850.0
800		237.8	277.5	317.1	356.7	396.4	436.0	475.6	515.3	554.9	594.5	634.2	713.4	792.7	872.0	951.3
900		262.1	305.8	349.5	393.2	436.9	480.6	524.3	568.0	611.7	655.3	699.0	786.4	873.8	961.2	1048.6
1000		285.5	333.1	380.7	428.3	475.9	523.5	571.1	618.7	666.2	713.8	761.4	856.6	951.8	1047.0	1142.1
1100		308.1	359.4	410.8	462.1	513.5	564.8	616.2	667.5	718.8	770.2	821.5	924.2	1026.9	1129.6	1232.3
1200		329.8	384.8	439.8	494.7	549.7	604.7	659.7	714.6	769.6	824.6	879.6	989.5	1099.4	1209.4	1319.3
1300		350.9	409.4	467.8	526.3	584.8	643.3	701.4	760.2	818.7	877.2	935.7	1052.6	1169.6	1286.5	1403.5
1400		371.3	433.1	495.0	556.9	618.8	680.6	742.5	804.4	866.3	928.1	990.0	1113.8	1237.5	1361.3	1485.0
1500		391.0	456.2	521.4	586.6	651.7	716.9	782.1	847.3	912.4	977.6	1042.8	1173.1	1303.5	1433.8	1564.2
1600		410.3	478.7	547.1	615.4	683.8	752.2	820.6	889.0	957.4	1025.7	1094.1	1230.9	1367.7	1504.4	1641.2
1700		429.1	500.6	572.1	643.6	715.1	786.6	858.1	929.6	1001.2	1072.7	1144.2	1287.2	1430.2	1573.3	1716.3
1800		447.4	522.0	596.5	671.1	745.7	820.2	894.8	969.4	1043.9	1118.5	1193.1	1342.2	1491.3	1640.5	1781.6
1900		465.4	542.9	620.5	698.0	775.6	853.1	930.7	1008.3	1085.8	1163.4	1240.9	1396.1	1551.2	1706.3	1861.4
2000		483.0	563.5	643.9	724.4	804.9	885.4	965.9	1046.4	1126.9	1207.4	1287.9	1448.9	1609.9	1770.9	1931.8
2200		517.3	603.5	689.7	776.0	862.2	948.4	1034.6	1120.8	1207.1	1293.3	1379.5	1551.9	1724.4	1896.8	2069.2
2400		550.7	642.5	734.3	826.1	917.9	1009.7	1101.4	1193.8	1285.0	1376.8	1468.6	1652.2	1835.8	2019.3	2202.9
2600		583.5	680.7	777.9	875.2	972.4	1069.7	1166.9	1264.1	1361.4	1458.6	1555.9	1750.4	1944.9	2139.3	2333.8
2800		615.7	718.3	820.9	923.5	1026.1	1128.7	1231.3	1333.9	1436.6	1539.2	1641.8	1847.0	2052.3	2257.5	2462.7
3000			755.4	863.4	971.3	1079.2	1187.1	1295.0	1402.9	1510.9	1618.8	1726.7	1942.5	2158.4	2374.2	2590.1
3200			792.2	905.4	1018.6	1131.8	1244.9	1358.1	1471.2	1584.5	1697.6	1810.8	2037.2	2263.5	2489.9	2716.2
3400			828.7	947.1	1065.5	1183.8	1302.2	1420.6	1539.0	1657.4	1775.8	1894.2	2130.9	2367.7	2604.5	2841.2
3600			864.8	988.4	1111.9	1235.4	1358.9	1482.5	1606.0	1729.6	1853.2	1976.7	2223.8	2470.9	2718.0	2965.1
3800			900.5	1029.1	1157.7	1286.4	1415.0	1543.6	1672.2	1800.9	1929.6	2058.2	2315.5	2572.8	2830.0	3087.3
4000				1069.2	1202.8	1336.5	1470.0	1603.7	1737.3	1871.1	2004.7	2138.4	2405.7	2673.0	2940.3	3207.6
4200				1108.3	1246.9	1385.4	1523.9	1662.4	1800.9	1939.6	2078.1	2216.7	2493.7	2770.8	3047.9	3325.0
4400				1146.2	1289.5	1432.8	1576.0	1719.2	1862.5	2005.9	2149.2	2292.5	2579.0	2865.6	3152.1	3438.7
4600				1182.5	1330.3	1478.1	1625.8	1773.6	1921.4	2069.4	2217.2	2365.0	2660.6	2956.3	3251.9	3547.5
4800				1216.7	1368.8	1520.9	1672.8	1824.9	1976.9	2129.2	2281.3	2433.4	2737.6	3041.8	3345.9	3650.1
5000				1248.3	1404.3	1560.4	1716.2	1872.2	2028.3	2184.5	2340.6	2496.6	2808.7	3120.8	3432.8	3744.9
5200				1276.7	1436.3	1595.9	1755.2	1914.8	2074.4	2234.2	2393.8	2553.4	2872.6	3191.8	3510.9	3830.1
5400				1301.3	1463.9	1626.6	1789.0	1951.6	2114.2	2277.2	2439.9	2602.5	2927.8	3253.2	3578.5	3903.8
5600				1321.2	1486.4	1651.5	1816.4	1981.5	2146.7	2312.2	2477.3	2642.5	2972.8	3303.1	3633.4	3963.7
5800				1335.8	1502.8	1669.8	1836.4	2003.4	2170.3	2337.7	2504.7	2671.7	3005.6	3339.6	3673.5	4007.5
6000				1344.2	1512.2	1680.2	1847.8	2015.8	2184.3	2352.3	2520.3	2688.3	3024.4	3360.4	3696.5	4032.5

\*Avoiding the [ ] marked ranges is recommended as endurance time is shorten

\*Balance the traveling speed as wind velocity of pulley in the [ ] marked range reaches more than 33 (m/s)

\*The above table shows values for the nominal width 10 (10mm). Multiply a value in the table by correction coefficient Kb in the table 28 for other widths.



# Technical Data

## Selection of Timing Belts 10 – Transmission Capacity Table –

Table 50. Reference Transmission Capacity of 2GT Ps – Belt Width 4mm –

(W)

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley		12	14	16	18	20	22	24	26	28	30	32	36	40	44	48	50	60	72
	Diameter of the Pitch Circle (mm)		7.64	8.91	10.19	11.46	12.73	14.01	15.28	16.55	17.83	19.10	20.37	22.92	25.46	28.01	30.56	31.83	38.20	45.84
20			0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.1	1.2	1.3	1.4	1.7	1.9	2.2	2.5	2.6	3.4	4.0
40			0.8	1.0	1.1	1.3	1.5	1.7	1.8	2.0	2.2	2.4	2.7	3.1	3.6	4.1	4.6	4.9	6.3	7.6
60			1.1	1.4	1.6	1.8	2.1	2.3	2.6	2.9	3.2	3.5	3.8	4.4	5.1	5.8	6.6	7.0	9.1	10.9
100			1.7	2.1	2.4	2.8	3.2	3.6	4.0	4.5	4.9	5.4	5.9	6.9	8.0	9.1	10.3	11.0	14.3	17.2
200			3.0	3.6	4.3	5.0	5.7	6.4	7.2	8.0	8.8	9.7	10.6	12.5	14.5	16.6	18.9	20.1	26.4	31.7
300			4.2	5.0	5.9	6.9	7.9	8.9	10.0	11.1	12.3	13.6	14.9	17.6	20.4	23.5	26.8	28.5	37.7	45.3
400			5.2	6.3	7.4	8.6	9.9	11.2	12.6	14.1	15.6	17.2	18.8	22.3	26.0	30.0	34.3	36.5	48.5	58.2
500			6.1	7.4	8.8	10.2	11.8	13.4	15.1	16.8	18.7	20.6	22.6	26.8	31.4	36.2	41.4	44.1	58.8	70.6
600			7.0	8.5	10.1	11.8	13.5	15.4	17.4	19.4	21.6	23.8	26.2	31.2	36.5	42.2	48.3	51.5	68.9	82.6
700			7.8	9.5	11.3	13.2	15.2	17.4	19.6	21.9	24.4	27.0	29.6	35.3	41.4	48.0	55.0	58.7	78.6	94.4
800			8.6	10.5	12.5	14.6	16.8	19.2	21.7	24.3	27.1	30.0	33.0	39.4	46.2	53.6	61.5	65.6	88.2	105.8
870			9.1	11.1	13.3	15.5	17.9	20.5	23.2	26.0	28.9	32.0	35.2	42.1	49.5	57.5	66.0	70.4	94.7	113.7
900			9.3	11.4	13.6	15.9	18.4	21.0	23.8	26.7	29.7	32.9	36.2	43.3	50.9	59.1	67.9	72.4	97.5	117.0
1000			10.0	12.3	14.6	17.2	19.9	22.7	25.7	28.9	32.2	35.7	39.3	47.1	55.4	64.4	74.1	79.1	106.7	128.0
1160			11.1	13.6	16.3	19.1	22.1	25.4	28.8	32.3	36.1	40.0	44.2	53.0	62.5	72.7	83.7	89.5	121.0	145.2
1200			11.4	13.9	16.6	19.6	22.7	26.0	29.5	33.2	37.0	41.1	45.3	54.4	64.2	74.8	86.1	92.0	124.6	149.5
1400			12.6	15.4	18.5	21.8	25.3	29.1	33.0	37.2	41.6	46.2	51.1	61.4	72.6	84.7	97.7	104.5	141.9	170.3
1450			12.9	15.8	19.0	22.4	26.0	29.8	33.9	38.2	42.7	47.5	52.5	63.1	74.7	87.2	100.6	107.6	146.2	175.4
1600			13.7	16.8	20.3	23.9	27.8	32.0	36.4	41.1	46.0	51.2	56.6	68.2	80.8	94.4	109.0	116.6	158.8	190.6
1750			14.5	17.8	21.5	25.4	29.6	34.1	38.8	43.8	49.1	54.7	60.6	73.1	86.7	101.4	117.2	125.5	171.2	205.4
1800			14.7	18.2	21.9	25.9	30.2	34.8	39.6	44.7	50.2	55.9	61.9	74.7	88.6	103.7	119.9	128.4	175.3	210.3
2000			15.7	19.4	23.4	27.8	32.4	37.4	42.7	48.3	54.2	60.4	66.9	81.0	96.2	112.8	130.5	139.9	191.4	229.7
2400			17.4	21.7	26.3	31.2	36.6	42.3	48.4	54.9	61.8	69.0	76.6	93.0	110.9	130.2	151.1	162.1	222.8	267.3
2800			19.0	23.7	28.8	34.4	40.4	46.9	53.8	61.1	68.9	77.1	85.8	104.4	124.8	146.9	170.8	183.4	253.1	303.7
3200			20.3	25.5	31.1	37.3	43.9	51.1	58.8	66.9	75.6	84.7	94.4	115.2	138.1	162.9	189.8	204.0	282.4	338.9
3600			21.5	27.1	33.2	39.9	47.2	55.0	63.4	72.4	81.9	92.0	102.6	125.6	150.9	178.4	208.2	223.9	311.0	373.2
4000			22.6	28.6	35.1	42.4	50.2	58.7	67.8	77.5	87.9	98.9	110.5	135.6	163.2	193.3	225.9	243.2	338.9	406.7
5000			24.7	31.6	39.2	47.7	56.9	66.9	77.7	89.2	101.6	114.7	128.7	158.9	192.2	228.7	268.3	289.3	406.0	487.2
6000			26.2	33.8	42.4	52.0	62.5	73.9	86.3	99.6	113.8	129.0	145.1	180.2	219.1	261.7	308.1	332.7	469.8	563.8
7000			27.1	35.5	45.0	55.5	67.2	79.9	93.8	108.8	124.8	142.0	160.2	200.0	244.2	292.8	345.8	373.9	531.0	637.3
8000			27.6	36.6	46.9	58.4	71.1	85.2	100.4	117.0	134.7	153.8	174.1	218.4	267.8	322.2	381.6	413.2	590.0	708.0
10000			27.5	37.5	49.2	62.4	77.1	93.5	111.4	130.9	151.9	174.6	198.7	251.8	311.2	376.8	448.7	487.0	702.1	842.6
12000			26.0	36.9	49.8	64.4	81.0	99.5	119.8	142.0	166.1	192.1	220.0	281.4	350.3	426.8	510.7	555.6	807.9	969.5
14000			23.5	35.1	48.9	64.9	83.1	103.5	126.1	150.9	177.9	207.1	238.4	307.8	385.9	472.8	568.5	619.7	908.3	1090.0

\*Because the durability in terms of hours decreases in the [dashed box] marked range, this range should be avoided whenever possible.  
For other belt widths, values above should be multiplied by the width correction coefficient shown in Table 28.

Selection is easy with Timing Pulleys and Belts automatic calculation tool available at:

[http://fawos.misumi.jp/FA\\_WEB/pulley\\_us/](http://fawos.misumi.jp/FA_WEB/pulley_us/)

Table 51. Reference Transmission Capacity of 3GT Ps – Belt Width 6 mm – (W)

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley Diameter of the Pitch Circle (mm)	12	14	16	18	20	22	24	26	28	30	32	36	40	48	54	60	72	80
		11.46	13.37	15.28	17.19	19.10	21.01	22.92	24.83	26.74	28.65	30.56	34.38	38.20	45.84	51.57	57.30	68.75	76.39
20		2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	5.9	6.4	6.9	7.8	8.7	10.5	11.8	13.1	15.7	17.4
40		3.6	4.5	5.5	6.4	7.3	8.2	9.1	10.0	10.9	11.8	12.6	14.3	16.0	19.3	21.7	24.2	28.9	32.0
60		5.0	6.4	7.7	9.0	10.3	11.6	12.9	14.2	15.4	16.7	17.9	20.4	22.8	27.5	30.9	34.4	41.1	45.5
100		7.6	9.7	11.8	13.9	15.9	18.0	19.9	21.9	23.9	25.9	27.8	31.6	35.3	42.6	48.0	53.4	63.8	70.6
200		13.1	16.9	20.8	24.6	28.2	32.0	35.6	39.2	42.8	46.4	49.9	56.8	63.6	76.8	86.5	96.1	114.8	127.0
300		17.7	23.2	28.7	34.1	39.2	44.6	49.6	54.8	59.9	65.0	69.8	79.6	89.2	107.7	121.4	134.8	161.0	178.1
400		21.9	28.9	35.9	42.8	49.4	56.3	62.7	69.3	75.7	82.2	88.4	100.9	113.0	136.5	153.9	171.0	204.1	225.7
500		25.6	34.2	42.6	51.0	58.9	67.2	74.9	82.9	90.6	98.5	105.9	121.0	135.6	163.8	184.7	205.1	244.8	270.7
600		29.1	39.0	48.9	58.7	67.8	77.5	86.5	95.8	104.8	114.0	122.6	140.1	157.1	189.8	214.0	237.7	283.7	313.5
700		32.2	43.6	54.8	66.0	76.4	87.4	97.6	108.2	118.4	128.9	138.6	158.5	177.8	214.8	242.2	269.1	321.0	354.7
800		35.2	47.9	60.4	72.9	84.6	96.9	108.3	120.1	131.5	143.2	154.1	176.2	197.7	239.0	269.4	299.3	357.0	394.3
870		37.2	50.8	64.2	77.6	90.1	103.3	115.5	128.2	140.4	152.9	164.6	188.3	211.3	255.4	288.0	319.8	381.4	421.3
900		38.0	52.0	65.8	79.6	92.4	106.0	118.6	131.6	144.2	157.0	169.0	193.3	217.0	262.3	295.8	328.5	391.7	432.6
1000		40.6	55.9	71.0	86.0	100.0	114.9	128.5	142.7	156.4	170.4	183.4	210.0	235.7	285.0	321.3	356.8	425.4	469.8
1160		44.4	61.8	78.8	95.8	111.6	128.4	143.8	159.9	175.2	191.1	205.7	235.6	264.5	319.9	360.7	400.6	477.4	527.0
1200		45.4	63.2	80.7	98.2	114.4	131.7	147.5	164.0	179.8	196.1	211.1	241.9	271.6	328.4	370.3	411.2	490.0	540.9
1400		49.6	69.9	89.7	109.6	128.0	147.5	165.5	184.2	202.1	220.5	237.5	272.2	305.7	369.8	416.9	462.9	551.4	608.3
1450		50.6	71.5	91.9	112.3	131.2	151.4	169.8	189.0	207.4	226.4	243.9	279.5	314.0	379.8	428.3	475.5	566.2	624.6
1600		53.4	76.0	98.2	120.3	140.8	162.6	182.5	203.3	223.2	243.7	262.6	301.1	338.4	409.3	461.5	512.3	609.8	672.5
1750		56.0	80.4	104.2	128.0	149.9	173.4	194.8	217.2	238.5	260.5	280.8	322.1	362.0	437.9	493.7	548.0	652.0	718.7
1800		56.8	81.7	106.1	130.5	152.9	176.9	198.8	221.7	243.5	266.0	286.7	328.9	369.7	447.2	504.2	559.6	665.7	733.7
2000		59.9	87.1	113.6	140.1	164.5	190.6	214.4	239.3	263.0	287.4	309.8	355.7	399.8	483.7	545.3	605.1	719.3	792.3
2400		65.2	96.6	127.3	158.1	186.2	216.4	243.8	272.4	299.7	327.9	353.7	406.3	456.9	552.8	622.9	690.9	820.1	902.2
2800		72.9	105.0	139.7	174.4	206.1	240.2	271.0	303.3	334.0	365.8	394.6	453.7	510.4	617.2	695.3	770.7	913.1	1003.1
3200		80.8	112.3	150.9	189.4	224.5	262.4	296.4	332.2	366.2	401.3	433.1	498.2	560.6	677.7	763.0	845.1	999.1	1095.6
3600		88.4	118.7	161.0	203.2	241.6	283.1	320.3	359.3	396.4	434.7	469.3	540.2	607.8	734.5	826.3	914.4	1078.4	1180.2
4000		95.9	124.3	170.2	216.0	257.5	302.4	342.6	384.9	424.9	466.3	503.5	579.8	652.4	787.8	885.6	979.0	1151.3	1257.0
5000		113.8	135.2	189.6	243.9	292.7	345.8	392.9	442.6	489.4	537.9	581.1	669.6	753.3	907.4	1017.3	1120.7	1306.3	1415.8
6000		130.7	154.3	204.6	266.8	322.3	383.0	436.3	492.7	545.5	600.3	648.7	747.7	840.5	1008.6	1126.6	1235.3	1422.5	1526.3
7000		147.0	173.3	216.0	285.5	347.2	414.7	473.7	536.1	594.2	654.6	707.3	815.0	915.0	1092.4	1214.1	1323.1	1499.2	1586.5
8000		162.6	191.5	224.1	300.4	367.7	441.6	505.6	573.4	636.2	701.3	757.6	872.2	977.3	1159.1	1279.9	1383.5	1534.5	1593.4
10000		192.2	225.7	259.3	320.5	397.5	482.4	554.7	631.3	701.2	773.7	834.6	957.4	1066.1	1240.3	1343.8	1418.4	1471.0	1431.9
12000		219.7	257.3	294.6	331.6	413.4	507.3	585.4	668.1	742.3	818.9	880.9	1004.0	1106.6	1249.1	1312.0	1329.1	1209.3	1008.1
14000		245.5	286.4	326.7	366.1	416.7	517.2	598.6	684.8	760.0	837.2	896.5	1010.9	1096.9	1180.1	1175.5	1102.1		

\*Because the durability in terms of hours decreases in the [ ] marked range, this range should be avoided whenever possible. For other belt widths, values above should be multiplied by the width correction coefficient shown in Table 28.



# Technical Data

## Selection of Timing Belts 11 – Transmission Capacity Table –

Table52. Reference Transmission Capacity of EV5GT Ps – Belt Width 15 mm –

(W)

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley		Diameter of the Pitch Circle (mm)																			
	22.28	25.46	14	16	18	20	22	24	26	28	30	32	36	40	44	48	54	60	72	80		
20	13	18	22	27	33	38	42	47	52	56	64	72	80	87	97	108	128	139				
40	24	33	41	50	61	70	79	88	96	104	120	136	150	163	183	203	240	263				
60	33	46	58	72	87	100	113	126	139	150	173	196	216	236	264	293	348	380				
100	50	71	91	113	136	157	178	199	219	237	273	310	343	374	419	465	552	604				
200	85	125	163	205	248	287	326	365	403	438	506	575	636	695	780	867	1031	1129				
300	115	173	228	289	350	407	464	520	574	625	723	823	912	996	1119	1244	1482	1623				
400	142	217	289	369	447	520	594	667	737	803	931	1060	1176	1285	1445	1607	1914	2096				
500	166	258	347	445	539	629	718	808	894	974	1131	1289	1430	1564	1759	1957	2333	2555				
600	188	297	402	518	627	733	839	944	1046	1141	1325	1511	1678	1836	2065	2298	2740	3002				
700	208	333	454	589	712	834	956	1077	1193	1302	1514	1728	1919	2101	2364	2632	3139	3439				
800	227	368	505	657	795	933	1069	1206	1337	1460	1699	1940	2156	2360	2657	2958	3529	3866				
870	239	392	540	704	851	1000	1147	1294	1436	1569	1826	2086	2319	2539	2858	3183	3797	4161				
900	244	402	554	724	875	1028	1180	1332	1478	1615	1880	2148	2388	2615	2944	3279	3912	4286				
1000	260	434	602	789	954	1122	1289	1456	1616	1767	2058	2352	2616	2865	3227	3593	4288	4698				
1160	284	483	675	890	1075	1268	1459	1649	1832	2004	2337	2672	2973	3257	3669	4087	4878	5343				
1200	289	495	693	915	1105	1304	1500	1696	1885	2062	2405	2751	3061	3353	3778	4209	5023	5502				
1400	315	551	780	1035	1251	1478	1704	1929	2145	2349	2742	3138	3493	3828	4314	4807	5736	6282				
1450	321	565	801	1065	1286	1521	1754	1986	2209	2419	2825	3233	3599	3945	4446	4954	5912	6474				
1600	338	605	863	1152	1391	1647	1901	2155	2397	2627	3070	3516	3914	4291	4837	5390	6430	7040				
1750	354	643	923	1237	1494	1771	2046	2320	2583	2831	3311	3793	4224	4631	5221	5817	6939	7595				
1800	358	655	943	1264	1527	1811	2093	2374	2644	2899	3390	3884	4326	4743	5347	5958	7106	7777				
2000	376	703	1020	1374	1659	1971	2280	2589	2884	3164	3703	4244	4728	5185	5846	6513	7765	8494				
2400	406	791	1165	1584	1911	2278	2641	3003	3349	3678	4309	4943	5509	6042	6812	7587	9034	9868				
2800	440	872	1301	1783	2151	2571	2986	3400	3795	4171	4892	5615	6259	6865	7737	8613	10238	11165				
3200	486	945	1429	1973	2380	2851	3318	3782	4225	4647	5455	6263	6982	7657	8625	9594	11379	12384				
3600	529	1011	1550	2155	2598	3120	3636	4150	4640	5107	5998	6888	7679	8419	9477	10531	12456	13522				
4000	571	1072	1665	2330	2808	3379	3944	4505	5041	5550	6522	7492	8350	9151	10291	11423	13466	14575				
5000	667	1202	1925	2738	3296	3986	4667	5343	5985	6597	7758	8910	9920	10854	12167	13450	15686	16815				
6000		1305	2153	3108	3737	4539	5330	6112	6853	7559	8889	10199	11335	12372	13803	15172	17429	18431				
7000		1382	2352	3445	4136	5044	5936	6817	7648	8438	9915	11358	12590	13695	15183	16561	18641	19343				
8000			2524	3749	4495	5501	6487	7459	8370	9235	10835	12383	13677	14812	16285	17586	19259					
9000			2671	4023	4815	5912	6984	8037	9018	9946	11645	13265	14586	15706	17086	18212						
10000				4266	5096	6277	7426	8550	9591	10570	12339	13998	15303	16361	17560							
12000				4660	5541	6865	8141	9375	10498	11541	13356	14976	16113	16883								
14000					4930	5825	7256	8617	9915	11067	12113	13831	15238									

\*Because the durability in terms of hours decreases in the [---] marked range, this range should be avoided whenever possible.  
For other belt widths, values above should be multiplied by the width correction coefficient shown in Table 28.

Table53. Reference Transmission Capacity of EV8YU Ps – Belt Width 20 mm –

(W)

Rotary Speed of Small Pulley (rpm)	No. of Teeth of Small Pulley		Diameter of the Pitch Circle (mm)																		
	50.93	56.02	20	22	24	26	28	30	32	34	36	38	40	44	48	54	60	64	72	80	
10	0.04	0.04	0.05	0.05	0.05	0.06	0.06	0.07	0.07	0.08	0.08	0.09	0.10	0.12	0.13	0.14	0.16	0.16	0.18	0.18	0.18
20	0.07	0.08	0.09	0.10	0.10	0.11	0.13	0.13	0.14	0.15	0.16	0.18	0.20	0.23	0.26	0.28	0.32	0.32	0.36	0.36	0.36
40	0.13	0.14	0.16	0.18	0.20	0.22	0.24	0.26	0.28	0.30	0.32	0.36	0.40	0.46	0.52	0.56	0.64	0.64	0.72	0.72	0.72
60	0.18	0.21	0.23	0.26	0.29	0.32	0.35	0.38	0.41	0.44	0.48	0.54	0.60	0.69	0.78	0.84	0.96	0.96	1.08	1.08	1.08
100	0.28	0.33	0.37	0.42	0.47	0.52	0.57	0.62	0.67	0.72	0.78	0.88	0.99	1.14	1.30	1.40	1.60	1.60	1.80	1.80	1.80
200	0.52	0.60	0.69	0.79	0.89	0.99	1.10	1.20	1.29	1.39	1.52	1.73	1.96	2.27	2.58	2.79	3.19	3.19	3.60	3.60	3.60
300	0.74	0.86	0.99	1.13	1.29	1.45	1.62	1.76	1.90	2.05	2.25	2.57	2.92	3.38	3.85	4.18	4.78	4.78	5.40	5.40	5.40
400	0.94	1.10	1.28	1.47	1.67	1.89	2.12	2.30	2.50	2.70	2.97	3.40	3.86	4.48	5.12	5.56	6.37	6.37	7.20	7.20	7.20
500	1.13	1.34	1.56	1.80	2.05	2.32	2.61	2.84	3.08	3.33	3.68	4.23	4.81	5.59	6.38	6.94	7.95	7.95	8.99	8.99	8.99
600	1.32	1.57	1.83	2.12	2.42	2.75	3.10	3.38	3.67	3.97	4.38	5.04	5.75	6.68	7.64	8.31	9.53	9.53	10.78	10.78	10.78
700	1.50	1.79	2.10	2.43	2.79	3.17	3.58	3.90	4.24	4.59	5.08	5.86	6.68	7.77	8.89	9.68	11.10	11.10	12.57	12.57	12.57
800	1.68	2.00	2.36	2.74	3.15	3.59	4.05	4.43	4.81	5.22	5.78	6.66	7.61	8.86	10.14	11.04	12.67	12.67	14.34	14.34	14.34
870	1.80	2.15	2.54	2.95	3.40	3.87	4.38	4.79	5.21	5.65	6.26	7.23	8.26	9.62	11.01	11.99	13.76	13.76	15.58	15.58	15.58
900	1.85	2.21	2.61	3.04	3.50	4.00	4.52	4.94	5.38	5.83	6.47	7.47	8.54	9.95	11.39	12.40	14.23	14.23	16.11	16.11	16.11
1000	2.02	2.42	2.86	3.34	3.85	4.40	4.99	5.46	5.94	6.45	7.15	8.27	9.46	11.03	12.63	13.75	15.78	15.78	17.88	17.88	17.88
1160	2.28	2.74	3.26	3.81	4.41	5.05	5.73	6.27	6.83	7.42	8.24	9.54	10.92	12.75	14.60	15.91	18.26	18.26	20.68	20.68	20.68
1200	2.34	2.82	3.35	3.92	4.54	5.20	5.91	6.47	7.06	7.66	8.51	9.86	11.29	13.17	15.09	16.45	18.87	18.87	21.37	21.37	21.37
1400	2.65	3.21	3.83	4.50	5.22	5.99	6.82	7.48	8.16	8.86	9.86	11.43	13.11	15.30	17.54	19.11	21.93	21.93	24.83	24.83	24.83
1450	2.73	3.31	3.94	4.64	5.39	6.19	7.05	7.72	8.43	9.16	10.20	11.82	13.56	15.83	18.15	19.78	22.69	22.69	25.68	25.68	25.68
1600	2.95	3.59	4.29	5.06	5.88	6.77	7.72	8.47	9.24	10.05	11.20	12.99	14.91	17.41	19.96	21.75	24.95	24.95	28.23	28.23	28.23
1750	3.17	3.87	4.63	5.47	6.37	7.34	8.39	9.20	10.05	10.93	12.19	14.15	16.25	18.98	21.75	23.71	27.18	27.18	30.75	30.75	30.75
1800	3.24	3.96	4.75	5.61	6.53	7.53	8.61	9.44	10.31	11.22	12.52	14.54	16.69	19.50	22.35	24.36	27.93	27.93	31.58	31.58	31.58
2000	3.52	4.32	5.19	6.14	7.17	8.29	9.48	10.41	11.37	12.38	13.82	16.06	18.46	21.56	24.71	26.94	30.85	30.85	34.86	34.86	34.86
2400	4.06	5.01	6.05	7.19	8.43	9.76	11.20	12.30	13.45	14.65	16.39	19.07	21.93	25.61	29.34	31.97	36.55	36.55	41.21	41.21	41.21
2800	4.57	5.66	6.88	8.20	9.64	11.2															



# Technical Data

## Selection of Conveyor Timing Belts

### ■ Conveyor belts selection procedure

The following steps for selection is based on the case that sizes of head pulley and tail pulley are same. (Follow the steps 1-3 even when sizes of head pulley and tail pulley are different.)  
Use a head pulley as a driving pulley. For belt installation and tension control, make the structure of the driven side to be adjustable of alignment and center distance with set screws.

\*Head Pulley: The front of the pulley against traveling direction  
Tail Pulley: The rear end of the pulley against traveling direction

#### [Step 1] Calculate effective tension (Te)

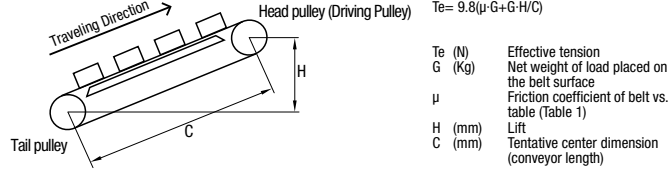


Table 1. Typical Friction Coefficient of Belt versus Table

Table Material	Steel	Stainless	Aluminium	UHMW	Teflon
Friction coefficient: μ	0.65	0.68	0.42	0.31	0.21

#### [Step 2] Calculate design tension (Td).

$T_d = K \cdot T_e$

$K = K_1 + K_2 + K_3$

Td (N) Design Tension  
K Overload Coefficient  
Te (N) Effective Tension  
K1 Correction factors for daily operation hours  
K2 Belt length correction coefficient  
K3 Belt speed correction coefficient

Table 2. K1 Correction Factors for Daily Operation Hours Unit: hour

~5	5-8	8-12	12-16	16-24
1.0	1.1	1.2	1.3	1.4

Table 3. K2 Belt Length Correction Factors Unit: mm

~1500	1501-3000	3001-4500	4501~
0.3	0.2	0.1	0.0

Table 4. K3 Belt Speed Correction Factors Unit: m/minute

~60	61-90	91-120
0.0	0.1	0.2

#### [Step 3] Select belt type, belt width and pulley dimension

(1) Select from Table 5 a belt type and a width which have a greater allowable tension than the designed tension.

Table 5. Allowable Tension of Joint Belts Unit: N

Belt Type	Belt width (mm)						
	10	15	20	25	30	40	50
S5M	120	180	—	300	—	—	—
S8M	—	235	—	392	471	627	—
T5	58	87	116	145	—	—	—
T10	—	180	240	300	360	481	601
AT5	74	110	—	—	—	—	—
AT10	—	234	312	391	—	—	—

Table 6. Number of Minimum Allowable Number of Teeth for Pulleys

Belt Type	Belt Nominal Width							
	050	075	100	150	200	—	—	—
L	92	138	184	276	—	—	—	—
H	—	163	216	324	432	—	—	—

(2) Select a pulley with a larger number of teeth than the minimum allowable number in Table 6 for both of driving and driven pulley.

Table 6. Number of Minimum Allowable Number of Teeth for Pulleys

Belt Type	L	H	S5M	S8M	T5	T10	AT5	AT10
Pitch (mm)	9.525	12.7	5	8	5	10	5	10
Min. No. of Pully Teeth	14	14	14	24	12	14	20	14
Pully Diameter (mm)	42.45	56.60	22.28	61.12	19.10	44.56	31.83	44.56

Reference: Table on Open-end belts Allowable Tension Unit: N

Belt Type	Material	Belt width (mm)							
		6	10	15	20	25	30	40	50
S3M	Polyurethane	127	—	—	—	—	—	—	—
S5M	Rubber	—	310	490	—	—	—	—	—
	Polyurethane	—	215	323	—	539	—	—	—
S8M	Rubber	—	—	—	—	950	—	—	—
	Polyurethane	—	—	647	—	1176	1412	1882	—
T5	Polyurethane	—	112	166	225	284	—	—	—
T10	Polyurethane	—	—	299	397	529	627	862	1064
AT5	Polyurethane	—	147	221	—	—	—	—	—
AT10	Polyurethane	—	—	469	625	781	—	—	—

- When using belts for other purpose than conveyance (e.g. transmission), for polyurethane belt S3M; design with 1/2 of the allowable tension in the table; for XL, L, H, S5M, S8M, T5 and T10, design with approx. 2/3 of the allowable tension in the table.

#### [Step 4] Determine belt length (no. of teeth) and center distance.

(1) Obtain approximate belt length from tentative center dimension (C') and approximate pulley diameter (Dp').

$L_p' = 2 \cdot C' + \pi \cdot D_p'$

Lp' (mm) Approx. belt length  
C' (mm) Tentative center dimension  
Dp' (mm) Approx. pulley diameter

(2) Determine the number of teeth required from the approximate belt length (Lp') and pitch (P). Round down the obtained number of teeth (N) to the nearest whole number.

$N = L_p' / P$

N (mm) No. of belt teeth  
P (mm) Pitch

\*Check the minimum teeth of belt which is available.

(3) Obtain the proper belt length from the number of teeth (N) and pitch (P).

$L_p = P \cdot N$

Lp (mm) Belt length

(4) Determine proper center distance with the following formula:

$C = P \cdot (N - D_z) / 2$

C (mm) Center Distance  
Dz (mm) No. of teeth of pulley

#### [Step 5] Confirm the adjustment margin for the center distance is larger than figures in Table 7-a and 7-b.

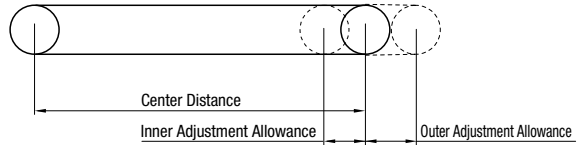


Table 7-a: Inner Adjustment Allowance (Attachment Allowance)

Belt Type	Inner Adjustment Allowance
L	More than 10mm
H	More than 15mm
S5M	More than 10mm
S8M	More than 15mm
T5	More than 5mm
T10	More than 10mm
AT5	More than 10mm
AT10	More than 15mm

Table 7-b: Outer Adjustment Allowance (Tension Allowance)

Distance between shafts (mm)	Outer Adjustment Allowance
0000-0500	More than 5mm
0501-1000	More than 10mm
1001-1500	More than 15mm
1501-2000	More than 20mm
2001-2500	More than 25mm
2501-0000	More than 1% of center distance

#### [Step 6] Install timing belt

Install the belt with the installation tension in Table 8.  
Axis weight at this time is twice the installation tension.

$F_s = 2 \cdot T_i$

Fs (N) Shaft load  
Ti (N) Fixing Tension (Table 8)

Table 8. Installation Tension for Joint Belts Unit: N

Belt Type	Belt width (mm)							
	10	15	20	25	30	40	50	
S5M	60	90	—	150	—	—	—	
S8M	—	117	—	196	235	313	—	
T5	29	43	58	72	—	—	—	
T10	—	90	120	150	180	240	300	
AT5	37	55	—	—	—	—	—	
AT10	117	156	195	—	—	—	—	

Table 8. Installation Tension for Joint Belts Unit: N

Belt Type	Belt Nominal Width				
	050	075	100	150	200
L	46	69	92	138	—
H	—	81	108	162	216

Table 8. Installation Tension for Joint Belts Unit: N

Belt Type	Material	Belt Nominal Width (mm)							
		025	037	050	075	100	150	200	
XL	Rubber	—	45	70	—	—	—	—	
	Polyurethane	66	102	142	—	—	—	—	
L	Rubber	—	—	95	165	—	—	—	
	Polyurethane	—	—	259	387	519	—	—	
H	Rubber	—	—	—	600	—	—	—	
	Polyurethane	—	—	—	397	529	799	1093	



# Technical Data


## Synchronous Belt Reference Information

### ■ Early failures and countermeasures

Abnormal Phenomena	Cause	Measures
<b>Abnormal Wear of Belt Side Faces</b>	<ul style="list-style-type: none"> <li>· Pulley misalignment</li> <li>· Pulley shafts misalignments</li> <li>· Bent pulley flanges</li> </ul>	<ul style="list-style-type: none"> <li>· Realign</li> <li>· Correct shaft misalignments</li> <li>· Correct bent pulley flanges</li> </ul>
<b>Tooth Contact Pressure Surface Abnormal Wear</b>	<ul style="list-style-type: none"> <li>· Overload</li> <li>· Belt tension too high, too low</li> </ul>	<ul style="list-style-type: none"> <li>· Redesign with a wide belt or use larger belt pitch</li> <li>· Adjust initial belt tension</li> </ul>
<b>Belt Abnormal Wear of Pulley Contacting Area</b>	<ul style="list-style-type: none"> <li>· Pulley tooth shape incorrect</li> <li>· Belt tension too high</li> </ul>	<ul style="list-style-type: none"> <li>· Adjust initial belt tension</li> <li>· Remake pulley taking note of tooth tip radius</li> </ul>
<b>Broken/Missing Tooth</b>	<ul style="list-style-type: none"> <li>· Pulley diameter too small</li> <li>· Small pulley meshing 6 teeth or less</li> <li>· Shock loading exists</li> </ul>	<ul style="list-style-type: none"> <li>· Redesign</li> <li>· Increase small pulley tooth mesh or redesign</li> <li>· Avoid shock loading on belt</li> <li>· Increase belt width</li> </ul>
<b>Severed Core Wire</b>	<ul style="list-style-type: none"> <li>· Overload</li> <li>· Core wire decreased elasticity or corrosion</li> <li>· Induction of foreign particles</li> <li>· Excessive temperature</li> </ul>	<ul style="list-style-type: none"> <li>· Redesign</li> <li>· Check belt storage and shipping history/condition</li> <li>· Avoid shocks</li> <li>· Provide a belt cover</li> <li>· Lower environment temperature</li> </ul>
<b>Cracks on Backing Rubber</b>	<ul style="list-style-type: none"> <li>· Usage in low temperature</li> <li>· Pulley diameter too small</li> </ul>	<ul style="list-style-type: none"> <li>· Raise environment temp.</li> <li>· Increase pulley diameter</li> </ul>
<b>Heat Degradation of Rubber</b>	<ul style="list-style-type: none"> <li>· Rubber degradation due to high environment temperature</li> </ul>	<ul style="list-style-type: none"> <li>· Lower environment temperature</li> </ul>
<b>Rubber Swelling</b>	<ul style="list-style-type: none"> <li>· Contact with oils</li> <li>· Contact with water</li> </ul>	<ul style="list-style-type: none"> <li>· Avoid oil from contacting</li> <li>· Avoid water from contacting</li> </ul>
<b>Abnormal Wear of Pulley Teeth</b>	<ul style="list-style-type: none"> <li>· Overload</li> <li>· Belt tension too high</li> <li>· Pulley material too soft</li> </ul>	<ul style="list-style-type: none"> <li>· Redesign</li> <li>· Adjust initial belt tension</li> <li>· Apply surface hardening treatment on pulley or change pulley material</li> </ul>
<b>Pulley Circumference Wear</b>	<ul style="list-style-type: none"> <li>· Pulley service life has been reached</li> <li>· Belt tension too high (core wire visible on belt back side)</li> </ul>	<ul style="list-style-type: none"> <li>· Replace with a new pulley</li> <li>· Replace with new pulley and belt, and use lower belt tension</li> </ul>
<b>Abnormal Sound</b>	<ul style="list-style-type: none"> <li>· Belt tension too high</li> <li>· Overload</li> <li>· Pulley diameter too small</li> <li>· Pulley tooth shape incorrect</li> </ul>	<ul style="list-style-type: none"> <li>· Realign</li> <li>· Adjust initial belt tension</li> <li>· Redesign</li> <li>· Correct pulley tooth geometry</li> </ul>
<b>Apparent Belt Stretch</b>	<ul style="list-style-type: none"> <li>· Shaft center distance too small</li> <li>· Loose machine base</li> </ul>	<ul style="list-style-type: none"> <li>· Adjust to correct shaft distance</li> <li>· Reinforce machine base</li> </ul>

### ■ About Pulley Alignments

Misaligned pulleys may cause early belt failure and flange damages.  
Align as show below

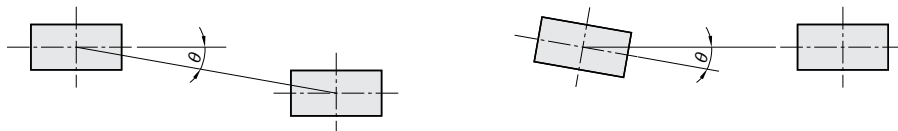

#### •MXL/XL/L/H/S\_M/MTS\_M/T Series

Belt Width (mm)	10	20	30≤
tanθ	5/1000	3/1000	2/1000

#### •P\_M/UP\_M

Belt Width (mm)	≤30
tanθ	5/1000

#### •\_GT/EV5GT/EV8YU

Belt Width (mm)	≤20	20<40
tanθ	6/1000	3/1000






# Technical Data

## Synchronous Belt Replacement Indicators

### ■ Belt Structure

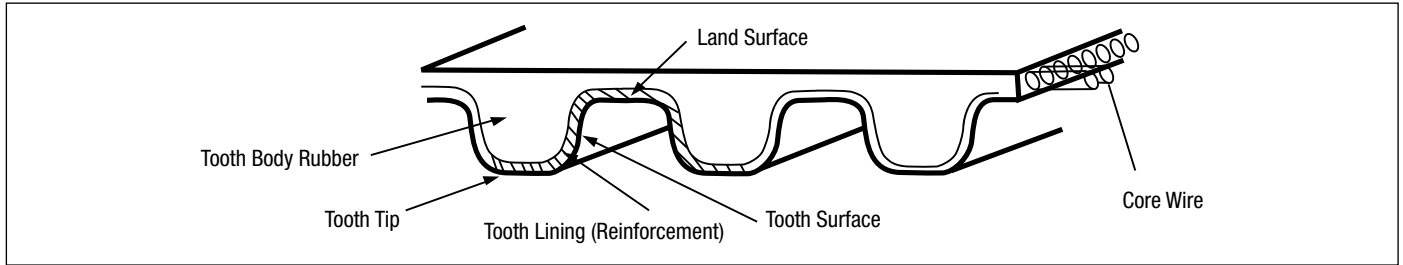

### ■ Examples of Belt Replacement Indicators

Examples	Condition
1. When belt tooth reinforcement fabric is worn and rubber/core wire are exposed. When tooth surface/grooves are worn and rubber/core wire are exposed	
2. When the backing rubber shows cracks due to hardening	
3. When cracks reaching the rubber are seen at tooth base	
4. Belt side faces are damaged due to wear	
5. When missing tooth can be seen	
6. When excessive wear can be seen on belt back side	
7. When belt or core wire are broken	

• These are timing belt replacement guides. Early or periodical replacements are recommended even the signs shown above are not yet visible.




# Technical Data

## Pulley/Tooth Tolerance

Excerpts from JIS B 1856(1993)

### 1. Dimensions of the Rack for the Cutter and the Tolerances

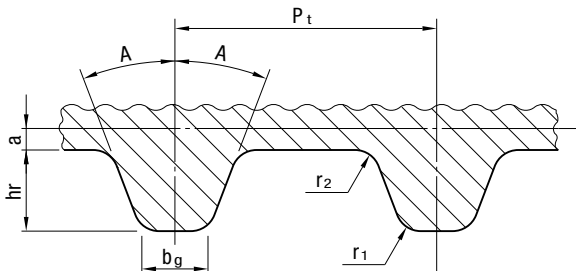

The pulley should have involute teeth, which are created and shaped by the cutter. The dimensions of the rack for the cutter and the tolerances as determined by analyzing the shape of the rack with a projector, shape measuring instrument or the like, should agree with the relevant figures in the table below.

Unit: mm

Type	Number of Teeth of the Pulley Z	Pt	A ±0.12	hr +0.05 0	bg +0.05 0	r1 ±0.03	r2 ±0.03	2a <sup>(1)</sup> (Reference)
MXL	10 ≤ Z ≤ 23	2.032 ± 0.008	28°	0.64	0.61	0.30	0.23	0.508
	24 ≤ Z		20°					
XL	10 ≤ Z	5.080 ± 0.010	25°	1.40	1.27	0.61	0.61	0.508
L	10 ≤ Z	9.525 ± 0.012	20°	2.13	3.10	0.86	0.53	0.762
H	14 ≤ Z ≤ 19	12.700 ± 0.016	20°	2.59	4.24	1.47	1.04	1.372
	20 ≤ Z						1.42	

Note <sup>(1)</sup>: a is a measurement indicating the position corresponding to the pitch line (Centerline of the Core Line of the Belt) of the belt corresponding to the shape of the rack for the cutter.

### 2. Tolerance of Adjacent Pitch Error and Cumulative Pitch Error Unit: mm

Addendum Circle Diameter of Pulley d <sub>0</sub>	Allowable Value	
	Tolerance of Adjacent Pitch Error	Accumulated Pitch Error
5.96 ≤ d <sub>0</sub> ≤ 25.40	0.03	0.05
25.40 < d <sub>0</sub> ≤ 50.80	0.03	0.08
50.80 < d <sub>0</sub> ≤ 101.60	0.03	0.10
101.60 < d <sub>0</sub> ≤ 177.80	0.05	0.13
177.80 < d <sub>0</sub> ≤ 304.80	0.05	0.15
304.80 < d <sub>0</sub> ≤ 508.00	0.08	0.18
508.00 < d <sub>0</sub> ≤ 762.00	0.08	0.20
762.00 < d <sub>0</sub> ≤ 967.16	0.08	0.23

### 4. Tolerances of Addendum Circle Diameter Unit: mm

Addendum Circle Diameter of Pulley d <sub>0</sub>	Tolerance
5.96 ≤ d <sub>0</sub> ≤ 25.40	+0.05 0
25.40 < d <sub>0</sub> ≤ 50.80	+0.08 0
50.80 < d <sub>0</sub> ≤ 101.60	+0.10 0
101.60 < d <sub>0</sub> ≤ 177.80	+0.13 0
177.80 < d <sub>0</sub> ≤ 304.80	+0.15 0
304.80 < d <sub>0</sub> ≤ 508.00	+0.18 0
508.00 < d <sub>0</sub> ≤ 762.00	+0.20 0
762.00 < d <sub>0</sub> ≤ 967.16	+0.23 0

### 3. Tolerance of Side Deflection Unit: mm

Addendum Circle Diameter of Pulley d <sub>0</sub>	Tolerance of Deflection (TIR) <sup>(2)</sup>
5.96 ≤ d <sub>0</sub> ≤ 101.60	0.10
101.60 < d <sub>0</sub> ≤ 254.00	Addendum Circle Dia. d <sub>0</sub> × 0.001
254.00 < d <sub>0</sub> ≤ 967.16	0.25 + [(Addendum Circle Dia. d <sub>0</sub> - 254.00) × 0.0005]

Note <sup>(2)</sup>: TIR is an abbreviation for Total Indicator Reading and refers to the difference between the max. deflection reading and the min. deflection reading.

### 5. Tolerance of Circumferential Deflection of Addendum Circle Unit: mm

Addendum Circle Diameter of Pulley d <sub>0</sub>	Tolerance of Circumferential Deflection
5.96 ≤ d <sub>0</sub> ≤ 203.20	0.13
203.20 < d <sub>0</sub> ≤ 967.16	0.13 + [(Addendum Circle Dia. d <sub>0</sub> - 203.20) × 0.0005]

### 6. Tolerance of Cylindricity and Parallelism Unit: mm

Nominal Widths of Pulley	Cylindricity Tolerance	Parallelism Tolerance
025~050	0.01	0.03
075~150	0.02	
200 · 300	0.04	0.04
400 · 500	0.06	0.05



# Technical Data

## Regular Machining Dimension Tolerance

Excerpts from JIS B 0405, 0419(1991)

### 1. Regular Cut Dimension Tolerance B 0405-1991-

Tolerances in Respect of Length Excluding Chamfered Portion

Typically, unless otherwise specified, Misumi uses "medium" tolerance for all machined features. Please, verify the tolerance with Misumi technical team at [engineering@misumiusa.com](mailto:engineering@misumiusa.com)

Unit: mm

Tolerance Class		Classification of Reference Dimension							
Symbol	Description	0.5 (1) or More 3 or Less	More than 3 6 or Less	More than 6 30 or Less	More than 30 120 or Less	More than 120 400 or Less	More than 400 1000 or Less	More than 1000 2000 or Less	More than 2000 4000 or Less
		Tolerance							
f	Precision Grade	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	—
m	Medium	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2
c	Coarse	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4
v	Extremely Coarse	—	±0.5	±1	±1.5	±2.5	±4	±6	±8

Note <sup>(1)</sup>: A reference dimension less than 0.5 mm is followed by a tolerance.

### 2. Tolerances in Respect of the Length of the Chamfered Portion (Radius of rounding for edges and edge chamfering dimension) Unit: mm

Tolerance Class		Classification of Reference Dimension		
Symbol	Description	0.5 (2) or More 3 or Less	More than 3 6 or Less	More than 6
		Tolerance		
f	Precision Grade	±0.2	±0.5	±1
m	Medium	±0.2	±0.5	±1
c	Coarse	±0.4	±1	±2
v	Extremely Coarse	±0.4	±1	±2

Note <sup>(2)</sup>: A reference dimension less than 0.5 mm is followed by a tolerance.

### 3. Angle Tolerance

Tolerance Class		Length of Shorter Side (Unit: mm)				
Symbol	Description	10 or Less	More than 10 50 or Less	More than 50 120 or Less	More than 120 400 or Less	More than 400
		Tolerance				
f	Precision Grade	±1°	±30'	±20'	±10'	±5'
m	Medium	±1°	±30'	±20'	±10'	±5'
c	Coarse	±1° 30'	±1°	±30'	±15'	±10'
v	Extremely Coarse	±3°	±2°	±1°	±30'	±20'

### 4. Regular Perpendicularity Tolerance B 0419-1991-

Unit: mm

Tolerance Class	Nominal Length of Shorter Side			
	100 or Less	More than 100 300 or Less	More than 300 1000 or Less	More than 1000 3000 or Less
	Perpendicularity Tolerance			
H	0.2	0.3	0.4	0.5
K	0.4	0.6	0.8	1
L	0.6	1	1.5	2

### 5. Regular Straightness and Flatness Tolerance

Unit: mm

Tolerance Class	Nominal Length					
	10 or Less	More than 10 30 or Less	More than 30 100 or Less	More than 100 300 or Less	More than 300 1000 or Less	More than 1000 3000 or Less
	Regular Straightness and Flatness Tolerance					
H	0.02	0.05	0.1	0.2	0.3	0.4
K	0.05	0.1	0.2	0.4	0.6	0.8
L	0.1	0.2	0.4	0.8	1.2	1.6

### 6. Regular Symmetry Tolerance

Unit: mm

Tolerance Class	Nominal Length			
	100 or Less	More than 100 300 or Less	More than 300 1000 or Less	More than 1000
	Symmetry Tolerance			
H	0.5			
K	0.6	0.8	1	1
L	0.6	1	1.5	2



# Technical Data

## Basis of Fitting Selection/Dimensional Tolerances and Fitting

Drawing Manual in JIS (How To Use) Series  
Excerpts from JIS B 0401 (1998)

		H6	H7	H8	H9	Applicable Part	Functional Classification	Application Example		
Can be Moved Relatively	Clearance Fit	Loose Fit			c9	Part which accommodates a wide gap or moving part which needs a gap. Part which accommodates a wide gap to facilitate assembling. Part which needs an appropriate gap even at a high temperature.	Part whose structure needs a gap. Inflates. Large position error Fitting length is long. Cost needs to be reduced. Manufacturing Cost Maintenance Cost	Piston Ring and the Ring Groove Fitting by means of a loose set pin.		
		Light Roll Fit			d9	Part which accommodates or needs a gap.		Crank Web and Pin Bearing (Side) Exhaust Valve Box and the Sliding Part of a Spring Bearing Piston Ring and the Ring Groove		
		Roll Fit	e7	e8	e9	Part which accommodates a wide gap or needs a gap. Fairly wide gap, well greased bearing. Bearing subjected to a high temperature, high speed and heavy load (high-degree forced lubrication).	Regular Rotary or Sliding Part (Must be well greased.)	Fitting of the Exhaust Valve Box Main Bearing for the Crank Shaft Regular Sliding Part		
		Fine Roll Fit	f6	f7	f7	f8	Fitting so as to provide an appropriate gap to permit movement (high-quality fitting). Regular normal temperature bearing lubricated with grease or oil.	Regular Fitting (Often comes apart.)	Part in which a cooled exhaust valve box is inserted. Regular Shaft and Bushing Link Device Lever and Bushing	
		Sliding Fit	g5	g6			Continuously revolving part of a precision machine under a light load. Fitting with a narrow gap so as to permit movement (spigot and positioning). Precision sliding part.	Part required to make a precision motion with virtually no play.	Link Device Pin and Lever Key and its Groove Precision Control Valve Rod	
Cannot be Moved Relatively	Transition Fit	Push Fit	h5	h6	h7	h8	h9	Fitting so as to permit movement by hand, with a lubricant applied. (high-quality positioning) Special High Precision Sliding Part Unimportant Stationary Part	Force cannot be transmitted by the fitting force alone.  Slight force can be transmitted by the fitting force alone.  Hard to disassemble without damaging component parts.  Considerable force can be transmitted by the fitting force alone.	Fitting a rim and a boss together Fitting the gear of a precision gear device
		Driving Fit	h5	h6	h6	h6	h6	Fitting which accommodates a light gap. Precision fitting which locks both parts while the unit is used. Fitting which allows assembling and disassembling with a wooden or lead hammer.		Fitting Coupling Flanges Together Governor Path and Pin Fitting a Gear Rim and a Boss Together
		Press Fit	js5	k6				Fitting which requires an iron hammer or hand press for assembling, disassembling (a key or the like is necessary to prevent inter-part shaft rotation). Precision positioning.		Fixing the Shaft of a Gear Pump and a Casing Together Reamer Bolts
		Press Fit	k5	m6				Same as the above for assembling and disassembling. Precision positioning which allows no gap.		Fixing the piston of hydraulic equipment and a shaft together Fitting a Coupling Flange and a Shaft Together
		Press Fit	m5	n6				Fitting which requires considerable force for assembling, disassembling. Precision stationary fitting (a key or the like is necessary for high torque transmission purposes)		Shaft of a Flexible Coupling and Gear (Passive Side) Precision Fitting Insertion of a Suction Valve and Valve Guide
	Interference Fit	Strong Press Fit, Shrinkage Fit, Freeze Fit	n5	n6				Fitting which requires much force for assembling, disassembling (a key or the like is necessary for high torque transmission). Light press fitting or the like is necessary for non-ferrous component parts. Standard press fitting is required for iron component parts and a bronze part and a copper part.		Insertion of a Suction Valve and Valve Guide Fixing a Gear and a Shaft Together (Low Torque) Shaft of a Flexible Coupling and a Gear (Drive Side)
		Press Fit	p5	r6				Same as the above for assembling and disassembling. Shrinkage press fitting, cold press fitting or forced press fitting is required for large component parts.		Coupling and Shaft
		Press Fit	s6	t6						Attaching and Fixing a Bearing Bushing
		Press Fit	u6	x6				Firmly coupled together and requires shrinkage press fitting, cold press fitting or forced press fitting. Permanent assembly, which can not come apart. Press fitting or the like is required for light alloy members.		Insertion of a Suction Valve and Valve Box Fixing a Coupling Flange and a Shaft Together (High Torque)
		Press Fit	r5							Fixing the Rim of a Drive Gear and a Boss Together Attaching and Fixing a Bearing Bushing

### 1.1 Fitting, with Regularly Used Hole Adopted as Reference

Reference Shaft	Class of Tolerance Range for Shafts																			
	Clearance Fit			Transition Fit			Interference Fit													
H6				g5	h5	js5	k5	m5	n6*	p6*										
H7				f6	g6	h6	js6	k6	m6	n6	p6*	r6*	s6	t6	u6	x6				
H8				e7	f7	g7	h7	js7												
H9				d9	e9															
H10	b9	c9	d9																	


[Note]\*An exception may arise according to the dimensional sectioning scheme.

### 2.1 Fitting, with Regularly Used Shaft Adopted as Reference

Reference Shaft	Class of Tolerance Range for Holes																			
	Clearance Fit			Transition Fit			Interference Fit													
h5				JS6	K6	M6	N6*	P6												
h6				F6	G6	H6	JS6	K6	M6	N6	P6*									
h7				F7	G7	H7	JS7	K7	M7	N7	P7*	R7	S7	T7	U7	X7				
h8				E7	F7	H7														
h9				D8	E8	F8														
h10				D9	E9	H9														
				D8	E8	H8														
				C9	D9	E9	H9													
				B10	C10	D10														


[Note]\*An exception may arise according to the dimensional sectioning scheme.

### 1.2 Interrelation between Tolerance Ranges-Fitting with Regularly Used Hole Adopted as Reference

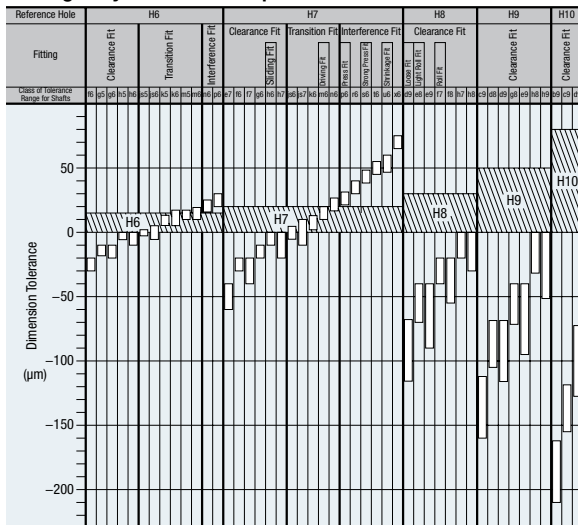

\*Values in cases where the measurement exceeds the reference dimension 18 mm, but does not exceed 30 mm.

### 2.2 Interrelation between Tolerance Ranges-Fitting with Regularly Used Shaft Adopted as Reference

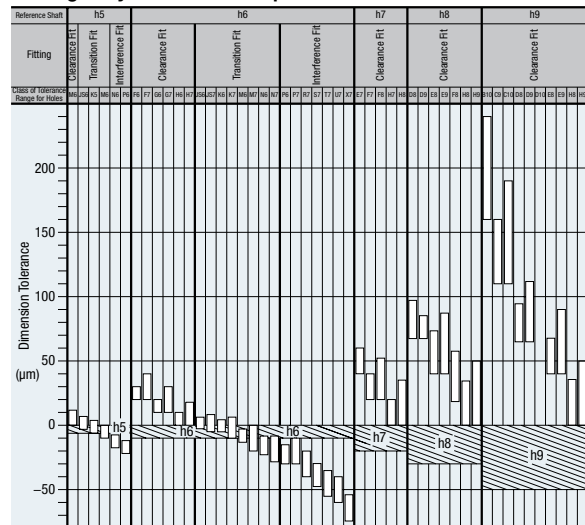

\*Values in cases where the measurement exceeds the reference dimension 18 mm, but does not exceed 30 mm.



# Technical Data

Excerpts from JIS B 0401 (1999)

## Dimension Tolerance for Regularly Used Fitting

### Dimension Tolerance of Shaft, Regularly Used Fitting

Reference Dimension (mm)	Class of Tolerance Range for Shafts																						Unit $\mu$ m																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
	More than	or Less	b9	c9	d8	d9	e7	e8	e9	f6	f7	f8	g5	g6	h5	h6	h7	h8	h9	js5	js6	js7	k5	k6	m5	m6	n5*	n6	p6	r6	s6	t6	u6	x6																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
—	3	-140 -165	-60 -85	-20 -34	-20 -45	-14 -24	-14 -28	-2 -39	-2 -12	-2 -16	-2 -20	-2 -24	0 -6	0 -12	0 -18	0 -24	0 -30	0 -36	0 -42	$\pm$ 2	$\pm$ 3	$\pm$ 5	+4	+6	+6	+8	+8	+10	+10	+12	+16	+20	+24	+26																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
3	6	-140 -170 -180	-70 -100 -110	-30 -48 -40	-20 -32 -25	-20 -38 -25	-20 -38 -25	-10 -18 -13	-10 -22 -13	-10 -22 -13	-10 -22 -13	-10 -22 -13	-4 -8 -5	-4 -8 -5	0 -5 -5	0 -8 -5	0 -12 -12	0 -16 -12	0 -20 -18	0 -24 -20	0 -28 -24	0 -32 -28	0 -36 -32	0 -40 -36	0 -44 -40	0 -48 -44	0 -52 -48	0 -56 -52	0 -60 -56	0 -64 -60	0 -68 -64	0 -72 -68	0 -76 -72	0 -80 -76	0 -84 -80	0 -88 -84	0 -92 -88	0 -96 -92	0 -100 -96	0 -104 -100	0 -108 -104	0 -112 -108	0 -116 -112	0 -120 -116	0 -124 -120	0 -128 -124	0 -132 -128	0 -136 -132	0 -140 -136	0 -144 -140	0 -148 -144	0 -152 -148	0 -156 -152	0 -160 -156	0 -164 -160	0 -168 -164	0 -172 -168	0 -176 -172	0 -180 -176	0 -184 -180	0 -188 -184	0 -192 -188	0 -196 -192	0 -200 -196	0 -204 -200	0 -208 -204	0 -212 -208	0 -216 -212	0 -220 -216	0 -224 -220	0 -228 -224	0 -232 -228	0 -236 -232	0 -240 -236	0 -244 -240	0 -248 -244	0 -252 -248	0 -256 -252	0 -260 -256	0 -264 -260	0 -268 -264	0 -272 -268	0 -276 -272	0 -280 -276	0 -284 -280	0 -288 -284	0 -292 -288	0 -296 -292	0 -300 -296	0 -304 -300	0 -308 -304	0 -312 -308	0 -316 -312	0 -320 -316	0 -324 -320	0 -328 -324	0 -332 -328	0 -336 -332	0 -340 -336	0 -344 -340	0 -348 -344	0 -352 -348	0 -356 -352	0 -360 -356	0 -364 -360	0 -368 -364	0 -372 -368	0 -376 -372	0 -380 -376	0 -384 -380	0 -388 -384	0 -392 -388	0 -396 -392	0 -400 -396	0 -404 -400	0 -408 -404	0 -412 -408	0 -416 -412	0 -420 -416	0 -424 -420	0 -428 -424	0 -432 -428	0 -436 -432	0 -440 -436	0 -444 -440	0 -448 -444	0 -452 -448	0 -456 -452	0 -460 -456	0 -464 -460	0 -468 -464	0 -472 -468	0 -476 -472	0 -480 -476	0 -484 -480	0 -488 -484	0 -492 -488	0 -496 -492	0 -500 -496	0 -504 -500	0 -508 -504	0 -512 -508	0 -516 -512	0 -520 -516	0 -524 -520	0 -528 -524	0 -532 -528	0 -536 -532	0 -540 -536	0 -544 -540	0 -548 -544	0 -552 -548	0 -556 -552	0 -560 -556	0 -564 -560	0 -568 -564	0 -572 -568	0 -576 -572	0 -580 -576	0 -584 -580	0 -588 -584	0 -592 -588	0 -596 -592	0 -600 -596	0 -604 -600	0 -608 -604	0 -612 -608	0 -616 -612	0 -620 -616	0 -624 -620	0 -628 -624	0 -632 -628	0 -636 -632	0 -640 -636	0 -644 -640	0 -648 -644	0 -652 -648	0 -656 -652	0 -660 -656	0 -664 -660	0 -668 -664	0 -672 -668	0 -676 -672	0 -680 -676	0 -684 -680	0 -688 -684	0 -692 -688	0 -696 -692	0 -700 -696	0 -704 -700	0 -708 -704	0 -712 -708	0 -716 -712	0 -720 -716	0 -724 -720	0 -728 -724	0 -732 -728	0 -736 -732	0 -740 -736	0 -744 -740	0 -748 -744	0 -752 -748	0 -756 -752	0 -760 -756	0 -764 -760	0 -768 -764	0 -772 -768	0 -776 -772	0 -780 -776	0 -784 -780	0 -788 -784	0 -792 -788	0 -796 -792	0 -800 -796	0 -804 -800	0 -808 -804	0 -812 -808	0 -816 -812	0 -820 -816	0 -824 -820	0 -828 -824	0 -832 -828	0 -836 -832	0 -840 -836	0 -844 -840	0 -848 -844	0 -852 -848	0 -856 -852	0 -860 -856	0 -864 -860	0 -868 -864	0 -872 -868	0 -876 -872	0 -880 -876	0 -884 -880	0 -888 -884	0 -892 -888	0 -896 -892	0 -900 -896	0 -904 -900	0 -908 -904	0 -912 -908	0 -916 -912	0 -920 -916	0 -924 -920	0 -928 -924	0 -932 -928	0 -936 -932	0 -940 -936	0 -944 -940	0 -948 -944	0 -952 -948	0 -956 -952	0 -960 -956	0 -964 -960	0 -968 -964	0 -972 -968	0 -976 -972	0 -980 -976	0 -984 -980	0 -988 -984	0 -992 -988	0 -996 -992	0 -1000 -996	0 -1004 -1000	0 -1008 -1004	0 -1012 -1008	0 -1016 -1012	0 -1020 -1016	0 -1024 -1020	0 -1028 -1024	0 -1032 -1028	0 -1036 -1032	0 -1040 -1036	0 -1044 -1040	0 -1048 -1044	0 -1052 -1048	0 -1056 -1052	0 -1060 -1056	0 -1064 -1060	0 -1068 -1064	0 -1072 -1068	0 -1076 -1072	0 -1080 -1076	0 -1084 -1080	0 -1088 -1084	0 -1092 -1088	0 -1096 -1092	0 -1100 -1096	0 -1104 -1100	0 -1108 -1104	0 -1112 -1108	0 -1116 -1112	0 -1120 -1116	0 -1124 -1120	0 -1128 -1124	0 -1132 -1128	0 -1136 -1132	0 -1140 -1136	0 -1144 -1140	0 -1148 -1144	0 -1152 -1148	0 -1156 -1152	0 -1160 -1156	0 -1164 -1160	0 -1168 -1164	0 -1172 -1168	0 -1176 -1172	0 -1180 -1176	0 -1184 -1180	0 -1188 -1184	0 -1192 -1188	0 -1196 -1192	0 -1200 -1196	0 -1204 -1200	0 -1208 -1204	0 -1212 -1208	0 -1216 -1212	0 -1220 -1216	0 -1224 -1220	0 -1228 -1224	0 -1232 -1228	0 -1236 -1232	0 -1240 -1236	0 -1244 -1240	0 -1248 -1244	0 -1252 -1248	0 -1256 -1252	0 -1260 -1256	0 -1264 -1260	0 -1268 -1264	0 -1272 -1268	0 -1276 -1272	0 -1280 -1276	0 -1284 -1280	0 -1288 -1284	0 -1292 -1288	0 -1296 -1292	0 -1300 -1296	0 -1304 -1300	0 -1308 -1304	0 -1312 -1308	0 -1316 -1312	0 -1320 -1316	0 -1324 -1320	0 -1328 -1324	0 -1332 -1328	0 -1336 -1332	0 -1340 -1336	0 -1344 -1340	0 -1348 -1344	0 -1352 -1348	0 -1356 -1352	0 -1360 -1356	0 -1364 -1360	0 -1368 -1364	0 -1372 -1368	0 -1376 -1372	0 -1380 -1376	0 -1384 -1380	0 -1388 -1384	0 -1392 -1388	0 -1396 -1392	0 -1400 -1396	0 -1404 -1400	0 -1408 -1404	0 -1412 -1408	0 -1416 -1412	0 -1420 -1416	0 -1424 -1420	0 -1428 -1424	0 -1432 -1428	0 -1436 -1432	0 -1440 -1436	0 -1444 -1440	0 -1448 -1444	0 -1452 -1448	0 -1456 -1452	0 -1460 -1456	0 -1464 -1460	0 -1468 -1464	0 -1472 -1468	0 -1476 -1472	0 -1480 -1476	0 -1484 -1480	0 -1488 -1484	0 -1492 -1488	0 -1496 -1492	0 -1500 -1496	0 -1504 -1500	0 -1508 -1504	0 -1512 -1508	0 -1516 -1512	0 -1520 -1516	0 -1524 -1520	0 -1528 -1524	0 -1532 -1528	0 -1536 -1532	0 -1540 -1536	0 -1544 -1540	0 -1548 -1544	0 -1552 -1548	0 -1556 -1552	0 -1560 -1556	0 -1564 -1560	0 -1568 -1564	0 -1572 -1568	0 -1576 -1572	0 -1580 -1576	0 -1584 -1580	0 -1588 -1584	0 -1592 -1588	0 -1596 -1592	0 -1600 -1596	0 -1604 -1600	0 -1608 -1604	0 -1612 -1608	0 -1616 -1612	0 -1620 -1616	0 -1624 -1620	0 -1628 -1624	0 -1632 -1628	0 -1636 -1632	0 -1640 -1636	0 -1644 -1640	0 -1648 -1644	0 -1652 -1648	0 -1656 -1652	0 -1660 -1656	0 -1664 -1660	0 -1668 -1664	0 -1672 -1668	0 -1676 -1672	0 -1680 -1676	0 -1684 -1680	0 -1688 -1684	0 -1692 -1688	0 -1696 -1692	0 -1700 -1696	0 -1704 -1700	0 -1708 -1704	0 -1712 -1708	0 -1716 -1712	0 -1720 -1716	0 -1724 -1720	0 -1728 -1724	0 -1732 -1728	0 -1736 -1732	0 -1740 -1736	0 -1744 -1740	0 -1748 -1744	0 -1752 -1748	0 -1756 -1752	0 -1760 -1756	0 -1764 -1760	0 -1768 -1764	0 -1772 -1768	0 -1776 -1772	0 -1780 -1776	0 -1784 -1780	0 -1788 -1784	0 -1792 -1788	0 -1796 -1792	0 -1800 -1796	0 -1804 -1800	0 -1808 -1804	0 -1812 -1808	0 -1816 -1812	0 -1820 -1816	0 -1824 -1820	0 -1828 -1824	0 -1832 -1828	0 -1836 -1832	0 -1840 -1836	0 -1844 -1840	0 -1848 -1844	0 -1852 -1848	0 -1856 -1852	0 -1860 -1856	0 -1864 -1860	0 -1868 -1864	0 -1872 -1868	0 -1876 -1872	0 -1880 -1876	0 -1884 -1880	0 -1888 -1884	0 -1892 -1888	0 -1896 -1892	0 -1900 -1896	0 -1904 -1900	0 -1908 -1904	0 -1912 -1908	0 -1916 -1912	0 -1920 -1916	0 -1924 -1920	0 -1928 -1924	0 -1932 -1928	0 -1936 -1932	0 -1940 -1936	0 -1944 -1940	0 -1948 -1944	0 -1952 -1948	0 -1956 -1952	0 -1960 -1956	0 -1964 -1960	0 -1968 -1964	0 -1972 -1968	0 -1976 -1972	0 -1980 -1976	0 -1984 -1980	0 -1988 -1984	0 -1992 -1988	0 -1996 -1992	0 -2000 -1996	0 -2004 -2000	0 -2008 -2004	0 -2012 -2008	0 -2016 -2012	0 -2020 -2016	0 -2024 -2020	0 -2028 -2024	0 -2032 -2028	0 -2036 -2032	0 -2040 -2036	0 -2044 -2040	0 -2048 -2044	0 -2052 -2048	0 -2056 -2052	0 -2060 -2056	0 -2064 -2060	0 -2068 -2064	0 -2072 -2068	0 -2076 -2072	0 -2080 -2076	0 -2084 -2080	0 -2088 -2084	0 -2092 -2088	0 -2096 -2092	0 -2100 -2096	0 -2104 -2100	0 -2108 -2104	0 -2112 -2108	0 -2116 -2112	0 -2120 -2116	0 -2124 -2120	0 -2128 -2124	0 -2132 -2128	0 -2136 -2132	0 -2140 -2136	0 -2144 -2140	0 -2148 -2144	0 -2152 -2148	0 -2156 -2152	0 -2160 -2156	0 -2164 -2160	0 -2168 -2164	0 -2172 -2168	0 -2176 -2172	0 -2180 -2176	0 -2184 -2180	0 -2188 -2184	0 -2192 -2188	0 -2196 -2192	0 -2200 -2196	0 -2204 -2200	0 -2208 -2204	0 -2212 -2208	0 -2216 -2212	0 -2220 -2216	0 -2224 -2220	0



# Technical Data

## Surface Roughness

JIS B 0601(1994)  
Excerpts from JIS B 0031(1994)

### 1. Varieties of Surface Roughness Indicators


Definitions and presentations of arithmetic average roughness(Ra), maximum height(Ry), 10 spot average roughness(Rz), average concave to convex distance(Sm), average distance between local peaks S and load length rate tp are given as parameters indicating the surface roughness of an industrial product. Surface roughness is the arithmetical average of values at randomly extracted spots on the surface of an object.

[Centerline average roughness(Ra75)is defined in the supplements to JIS B 0031 and JIS B 0601.]

#### Typical calculations of surface roughness

##### Arithmetic Average Roughness Ra


A portion stretching over a reference length in the direction in which the average line extends is cut out from the roughness curve. This portion is presented in a new graph with the X axis extending in the same direction as the average line and the Y axis representing the magnitude. Ra is represented by the equation shown at right, in microns(μm).

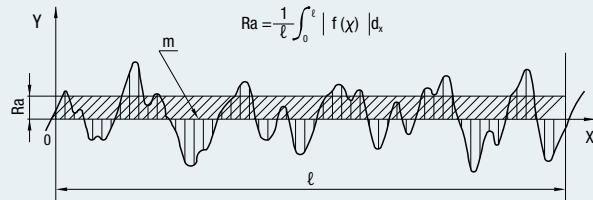

##### Maximum Height Ry


A portion stretching over a reference length in the direction in which the average line extends is cut out from the roughness curve. The gap between the peak line and the trough line is measured in the direction in which the magnitude axis extends, in microns(μm).

Reference A portion without an abnormally high peak or abnormally low trough, which may be regarded as a flaw, is cut out over the reference length.

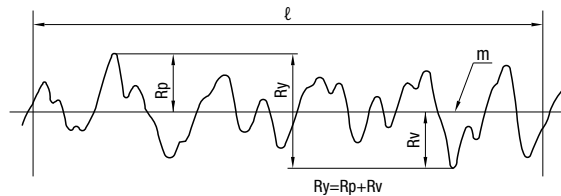

##### Ten-spot Average Roughness Rz

A portion stretching over a reference length in the direction in which the average line extends is cut out from the roughness curve. The average of the levels(Yp)of the highest peak to the fifth highest peak as measured from the average line and the average of the levels(Yv)of the lowest trough to the fifth lowest trough similarly measured in the said portion are added together. Rz is this sum, in microns(μm).

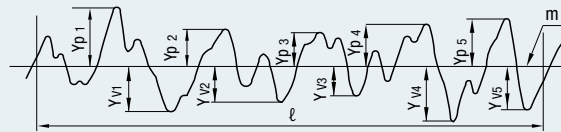

$$Rz = \frac{|Y_{p1} + Y_{p2} + Y_{p3} + Y_{p4} + Y_{p5}| + |Y_{v1} + Y_{v2} + Y_{v3} + Y_{v4} + Y_{v5}|}{5}$$

$Y_{p1}, Y_{p2}, Y_{p3}, Y_{p4}, Y_{p5}$ : Levels of the highest peak to the fifth highest peak in the said portion with the reference length  $l$ .

$Y_{v1}, Y_{v2}, Y_{v3}, Y_{v4}, Y_{v5}$ : Levels of the lowest trough to the fifth lowest trough in the said portion with the reference length  $l$ .

### Reference Relation between Arithmetic Average Roughness (Ra) and Conventional Parameters

Arithmetic Average Roughness Ra			Maximum Height Ry	Ten-spot Average Roughness Rz	Reference Length of Ry (Rz) $l$ (mm)	Conventional Finish Symbol
Standard Series	Cut-off Value $c$ (mm)	Graphical Representation of Surface Texture	Standard Series			
0.012 a 0.025 a 0.05 a 0.1 a 0.2 a	0.08 0.25	0.012/ ~ 0.2/	0.05 s 0.1 s 0.2 s 0.4 s 0.8 s	0.05 z 0.1 z 0.2 z 0.4 z 0.8 z	0.08 0.25	
0.4 a 0.8 a 1.6 a	0.8		0.4/ ~ 1.6/	1.6 s 3.2 s 6.3 s	1.6 z 3.2 z 6.3 z	
3.2 a 6.3 a	2.5	3.2/ ~ 6.3/	12.5 s 25 s	12.5 z 25 z	2.5	
12.5 a 25 a	8	12.5/ ~ 25/	50 s 100 s	50 z 100 z	8	
50 a 100 a	—	50/ ~ 100/	200 s 400 s	200 z 400 z	—	

\*Interrelations among the three types shown here are not precise, and are presented for convenience only.

\*Ra: The evaluation values of Ry and Rz are the cut-off value and the reference length each multiplied by five, respectively.



# Technical Data


## Drawing Indications of Surface Texture

Excerpts from JISB0031(1994)

### 1. Positions of Auxiliary Symbols for Surface Symbol

A surface roughness value, cut-off value or reference length, machining method, grain direction, surface undulation, etc. are indicated around the surface symbol as shown in Fig. 1 below.

Fig. 1 Positions of Auxiliary Symbols

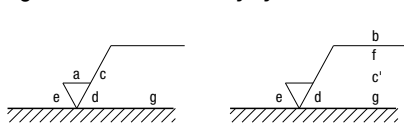

- a : Ra Value
- b : Machining Method
- c : Cut-Off Value, Evaluation Length
- c' : Reference Length, Evaluation Length
- d : Grain Direction
- f : Parameter other than Ra (tp:Parameter/Cut-Off Level)
- g : Surface Undulation (JIS B 0610)


**Reference** These symbols except a and f are provided when they are needed.

**Reference** Under ISO 1302, a finish range should be indicated as e in Fig. 1.


Code	Meaning	Illustration
=	The trace left by a cutting instrument is parallel to the projection plane in the drawing. Ex. Shaped Surface	
⊥	The trace left by a cutting instrument is perpendicular to the projection plane in the drawing. Ex. Shaped Surface (Side View) Circular Cut, Cylindrical Cut	
X	The pattern left by a cutting instrument diagonally crosses the projection plane in the drawing. Ex. Honed Surface	
M	The pattern left by a cutting instrument crosses in various directions or has no grain direction. Ex. Lapped Surface, Superfinished Surface and Surface Finished with a Front Mill or End Mill	
C	The pattern left by a cutting instrument is virtually concentric around the center of the plane in the drawing. Ex. Faced Surface	
R	The pattern left by a cutting instrument is virtually radial around the center of the plane in the drawing.	

### Examples of Graphical Representation of Surface Texture


Surface Symbol




Removal of Material by Machining is required




Removal of Material is Prohibited




Upper Limit of Ra




Grain Direction



Upper and Lower Limits of Ra



Machining Method





# Technical Data

## Hardness Conversion Table

(SAEJ417) \*Revised in 1983

Approximate Conversion of Rockwell C Hardness Values for Steel<sup>(1)</sup>

(HRC) Rockwell C-Scale Hardness	(HV) Vickers Hardness	Brinell Hardness (HB) 10mm Ball, Load 3000kgf		Rockwell Hardness <sup>(3)</sup>			Rockwell Superficial Hardness Diamond Cone Indenter			(Hs) Shore Hardness	Tensile Strength (Approximated Value) Mpa (kgf/mm <sup>2</sup> ) <sup>(2)</sup>	Rockwell C-Scale Hardness <sup>(3)</sup>
		Standard Sphere	Tungsten Carbide Sphere	(HRA) A Scale, Load 60kgf, Diamond Cone Indenter	(HRB) B Scale, Load 100kgf, Diameter 1.6mm (1/16in) Sphere	(HRD) D Scale, Load 100kgf, Diamond Cone Indenter	15-N Scale Load 15kgf	30-N Scale Load 30kgf	45-N Scale Load 45kgf			
68	940	—	—	85.6	—	76.9	93.2	84.4	75.4	97	—	68
67	900	—	—	85.0	—	76.1	92.9	83.6	74.2	95	—	67
66	865	—	—	84.5	—	75.4	92.5	82.8	73.3	92	—	66
65	832	—	(739)	83.9	—	74.5	92.2	81.9	72.0	91	—	65
64	800	—	(722)	83.4	—	73.8	91.8	81.1	71.0	88	—	64
63	772	—	(705)	82.8	—	73.0	91.4	80.1	69.9	87	—	63
62	746	—	(688)	82.3	—	72.2	91.1	79.3	68.8	85	—	62
61	720	—	(670)	81.8	—	71.5	90.7	78.4	67.7	83	—	61
60	697	—	(654)	81.2	—	70.7	90.2	77.5	66.6	81	—	60
59	674	—	(634)	80.7	—	69.9	89.8	76.6	65.5	80	—	59
58	653	—	615	80.1	—	69.2	89.3	75.7	64.3	78	—	58
57	633	—	595	79.6	—	68.5	88.9	74.8	63.2	76	—	57
56	613	—	577	79.0	—	67.7	88.3	73.9	62.0	75	—	56
55	595	—	560	78.5	—	66.9	87.9	73.0	60.9	74	2075 (212)	55
54	577	—	543	78.0	—	66.1	87.4	72.0	59.8	72	2015 (205)	54
53	560	—	525	77.4	—	65.4	86.9	71.2	58.5	71	1950 (199)	53
52	544	(500)	512	76.8	—	64.6	86.4	70.2	57.4	69	1880 (192)	52
51	528	(487)	496	76.3	—	63.8	85.9	69.4	56.1	68	1820 (186)	51
50	513	(475)	481	75.9	—	63.1	85.5	68.5	55.0	67	1760 (179)	50
49	498	(464)	469	75.2	—	62.1	85.0	67.6	53.8	66	1695 (173)	49
48	484	451	455	74.7	—	61.4	84.5	66.7	52.5	64	1635 (167)	48
47	471	442	443	74.1	—	60.8	83.9	65.8	51.4	63	1580 (161)	47
46	458	432	432	73.6	—	60.0	83.5	64.8	50.3	62	1530 (156)	46
45	446	421	421	73.1	—	59.2	83.0	64.0	49.0	60	1480 (151)	45
44	434	409	409	72.5	—	58.5	82.5	63.1	47.8	58	1435 (146)	44
43	423	400	400	72.0	—	57.7	82.0	62.2	46.7	57	1385 (141)	43
42	412	390	390	71.5	—	56.9	81.5	61.3	45.5	56	1340 (136)	42
41	402	381	381	70.9	—	56.2	80.9	60.4	44.3	55	1295 (132)	41
40	392	371	371	70.4	—	55.4	80.4	59.5	43.1	54	1250 (127)	40
39	382	362	362	69.9	—	54.6	79.9	58.6	41.9	52	1215 (124)	39
38	372	353	353	69.4	—	53.8	79.4	57.7	40.8	51	1180 (120)	38
37	363	344	344	68.9	—	53.1	78.8	56.8	39.6	50	1160 (118)	37
36	354	336	336	68.4	(109.0)	52.3	78.3	55.9	38.4	49	1115 (114)	36
35	345	327	327	67.9	(108.5)	51.5	77.7	55.0	37.2	48	1080 (110)	35
34	336	319	319	67.4	(108.0)	50.8	77.2	54.2	36.1	47	1055 (108)	34
33	327	311	311	66.8	(107.5)	50.0	76.6	53.3	34.9	46	1025 (105)	33
32	318	301	301	66.3	(107.0)	49.2	76.1	52.1	33.7	44	1000 (102)	32
31	310	294	294	65.8	(106.0)	48.4	75.6	51.3	32.7	43	980 (100)	31
30	302	286	286	65.3	(105.5)	47.7	75.0	50.4	31.3	42	950 (97)	30
29	294	279	279	64.7	(104.5)	47.0	74.5	49.5	30.1	41	930 (95)	29
28	286	271	271	64.3	(104.0)	46.1	73.9	48.6	28.9	41	910 (93)	28
27	279	264	264	63.8	(103.0)	45.2	73.3	47.7	27.8	40	880 (90)	27
26	272	258	258	63.3	(102.5)	44.6	72.8	46.8	26.7	38	860 (88)	26
25	266	253	253	62.8	(101.5)	43.8	72.2	45.9	25.5	38	840 (86)	25
24	260	247	247	62.4	(101.0)	43.1	71.6	45.0	24.3	37	825 (84)	24
23	254	243	243	62.0	100.0	42.1	71.0	44.0	23.1	36	805 (82)	23
22	248	237	237	61.5	99.0	41.6	70.5	43.2	22.0	35	785 (80)	22
21	243	231	231	61.0	98.5	40.9	69.9	42.3	20.7	35	770 (79)	21
20	238	226	226	60.5	97.8	40.1	69.4	41.5	19.6	34	760 (77)	20
(18)	230	219	219	—	96.7	—	—	—	—	33	730 (75)	(18)
(16)	222	212	212	—	95.5	—	—	—	—	32	705 (72)	(16)
(14)	213	203	203	—	93.9	—	—	—	—	31	675 (69)	(14)
(12)	204	194	194	—	92.3	—	—	—	—	29	650 (66)	(12)
(10)	196	187	187	—	90.7	—	—	—	—	28	620 (63)	(10)
(8)	188	179	179	—	89.5	—	—	—	—	27	600 (61)	(8)
(6)	180	171	171	—	87.1	—	—	—	—	26	580 (59)	(6)
(4)	173	165	165	—	85.5	—	—	—	—	25	550 (56)	(4)
(2)	166	158	158	—	83.5	—	—	—	—	24	530 (54)	(2)
(0)	160	152	152	—	81.7	—	—	—	—	24	515 (53)	(0)

Note(1): Blue figures: Based on ASTM E 140, Table 1 (Jointly coordinated by SAE, ASM and ASTM.)

(2): The units and figures shown in brackets are the results of conversion from psi figures by reference to JIS Z 8413 and Z 8438 conversion tables.  
Moreover, 1MPa=1N/mm<sup>2</sup>

(3): The figures in brackets are in ranges not frequently used. They are given as referential data.






# Technical Data

## Metric Coarse Screw Threads

Excerpts from JIS B0205 (2001)

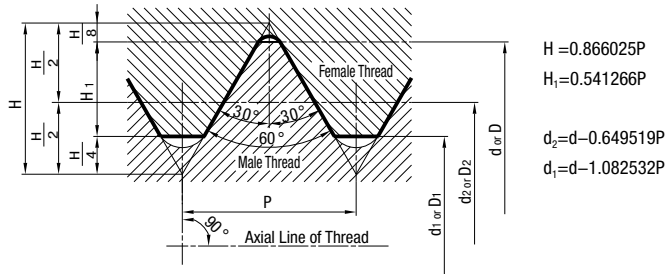

Unit:mm


Nominal of Thread(1)*			Pitch P	Height of Engagement H <sub>1</sub>	Female Thread		
Column 1	Column 2	Column 3			Minor Dia. D	Effective Dia. D <sub>2</sub>	Inner Dia. D <sub>1</sub>
					Male Thread		
			Outer Dia. d	Effective Dia. d <sub>2</sub>	Inner Dia. d <sub>1</sub>		
M1			0.25	0.135	1.000	0.838	0.729
	M1.1		0.25	0.135	1.100	0.938	0.829
M1.2			0.25	0.135	1.200	1.038	0.929
	M1.4		0.3	0.162	1.400	1.205	1.075
M1.6			0.35	0.189	1.600	1.373	1.221
	M1.8		0.35	0.189	1.800	1.573	1.421
M2			0.4	0.217	2.000	1.740	1.567
	M2.2		0.45	0.244	2.200	1.908	1.713
M2.5			0.45	0.244	2.500	2.208	2.013
M3			0.5	0.271	3.000	2.675	2.459
	M3.5w		0.6	0.325	3.500	3.110	2.850
M4			0.7	0.379	4.000	3.545	3.242
	M4.5		0.75	0.406	4.500	4.013	3.688
M5			0.8	0.433	5.000	4.480	4.134
M6			1	0.541	6.000	5.350	4.917
		M7	1	0.541	7.000	6.350	5.917
M8			1.25	0.677	8.000	7.188	6.647
		M9	1.25	0.677	9.000	8.188	7.647
M10			1.5	0.812	10.000	9.026	8.376
		M11	1.5	0.812	11.000	10.026	9.376
M12			1.75	0.947	12.000	10.863	10.106
	M14		2	1.083	14.000	12.701	11.835
M16			2	1.083	16.000	14.701	13.835
	M18		2.5	1.353	18.000	16.376	15.294
M20			2.5	1.353	20.000	18.376	17.294
	M22		2.5	1.353	22.000	20.376	19.294
M24			3	1.624	24.000	22.051	20.752
	M27		3	1.624	27.000	25.051	23.752
M30			3.5	1.894	30.000	27.727	26.211
	M33		3.5	1.894	33.000	30.727	29.211
M36			4	2.165	36.000	33.402	31.670
	M39		4	2.165	39.000	36.402	34.670
M42			4.5	2.436	42.000	39.077	37.129
	M45		4.5	2.436	45.000	42.077	40.129
M48			5	2.706	48.000	44.752	42.587
	M52		5	2.706	52.000	48.752	46.587
M56			5.5	2.977	56.000	52.428	50.046
	M60		5.5	2.977	60.000	56.428	54.046
M64			6	3.248	64.000	60.103	57.505
	M68		6	3.248	68.000	64.103	61.505

\*Priority should be given to Column 1. If required, select items in Column 2 and 3, in that order.



Technical Data  
Metric Fine Screw Threads

Excerpts from JIS B 0207 (1999)

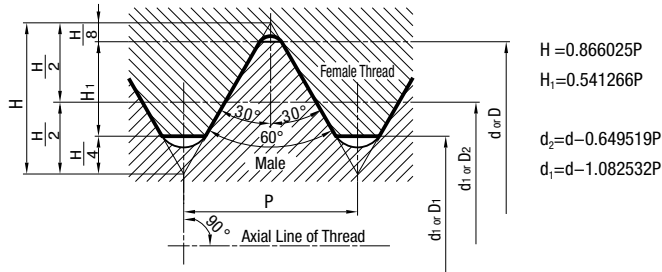

$D = d$   
 $D_2 = d_2$   
 $D_1 = d_1$

Unit: mm

Nominal of Thread	Pitch P	Height of Engagement $H_1$	Female Thread		
			Minor Dia. D	Effective Dia. $D_2$	Inner Dia. $D_1$
			Male Thread		
			Outer Dia. d	Effective Dia. $d_2$	Inner Dia. $d_1$
M 1 ×0.2	0.2	0.108	1.000	0.870	0.783
M 1.1×0.2	0.2	0.108	1.100	0.970	0.883
M 1.2×0.2	0.2	0.108	1.200	1.070	0.983
M 1.4×0.2	0.2	0.108	1.400	1.270	1.183
M 1.6×0.2	0.2	0.108	1.600	1.470	1.383
M 1.8×0.2	0.2	0.108	1.800	1.670	1.583
M 2 ×0.25	0.25	0.135	2.000	1.838	1.729
M 2.2×0.25	0.25	0.135	2.200	2.038	1.929
M 2.5×0.35	0.35	0.189	2.500	2.273	2.121
M 3 ×0.35	0.35	0.189	3.000	2.773	2.621
M 3.5×0.35	0.35	0.189	3.500	3.273	3.121
M 4 ×0.5	0.5	0.271	4.000	3.675	3.459
M 4.5×0.5	0.5	0.271	4.500	4.175	3.959
M 5 ×0.5	0.5	0.271	5.000	4.675	4.459
M 5.5×0.5	0.5	0.271	5.500	5.175	4.959
M 6 ×0.75	0.75	0.406	6.000	5.513	5.188
M 7 ×0.75	0.75	0.406	7.000	6.513	6.188
M 8 ×1	1	0.541	8.000	7.350	6.917
M 8 ×0.75	0.75	0.406	8.000	7.513	7.188
M 9 ×1	1	0.541	9.000	8.350	7.917
M 9 ×0.75	0.75	0.406	9.000	8.513	8.188
M 10 ×1.25	1.25	0.677	10.000	9.188	8.647
M 10 ×1	1	0.541	10.000	9.350	8.917
M 10 ×0.75	0.75	0.406	10.000	9.513	9.188
M 11 ×1	1	0.541	11.000	10.350	9.917
M 11 ×0.75	0.75	0.406	11.000	10.513	10.188
M 12 ×1.5	1.5	0.812	12.000	11.026	10.376
M 12 ×1.25	1.25	0.677	12.000	11.188	10.647
M 12 ×1	1	0.541	12.000	11.350	10.917
M 14 ×1.5	1.5	0.812	14.000	13.026	12.376
M 14 ×1.25	1.25	0.677	14.000	13.188	12.647
M 14 ×1	1	0.541	14.000	13.350	12.917
M 15 ×1.5	1.5	0.812	15.000	14.026	13.376
M 15 ×1	1	0.541	15.000	14.350	13.917
M 16 ×1.5	1.5	0.812	16.000	15.026	14.376
M 16 ×1	1	0.541	16.000	15.350	14.917
M 17 ×1.5	1.5	0.812	17.000	16.026	15.376
M 17 ×1	1	0.541	17.000	16.350	15.917
M 18 ×2	2	1.083	18.000	16.701	15.835
M 18 ×1.5	1.5	0.812	18.000	17.026	16.376
M 18 ×1	1	0.541	18.000	17.350	16.917
M 20 ×2	2	1.083	20.000	18.701	17.835
M 20 ×1.5	1.5	0.812	20.000	19.026	18.376
M 20 ×1	1	0.541	20.000	19.350	18.917
M 22 ×2	2	1.083	22.000	20.701	19.835
M 22 ×1.5	1.5	0.812	22.000	21.026	20.376
M 22 ×1	1	0.541	22.000	21.350	20.917
M 24 ×2	2	1.083	24.000	22.701	21.835
M 24 ×1.5	1.5	0.812	24.000	23.026	22.376
M 24 ×1	1	0.541	24.000	23.350	22.917

Nominal of Thread	Pitch P	Height of Engagement $H_1$	Female Thread		
			Minor Dia. D	Effective Dia. $D_2$	Inner Dia. $D_1$
			Male Thread		
			Outer Dia. d	Effective Dia. $d_2$	Inner Dia. $d_1$
M 25×2	2	1.083	25.000	23.701	22.835
M 25×1.5	1.5	0.812	25.000	24.026	23.376
M 25×1	1	0.541	25.000	24.350	23.917
M 26×1.5	1.5	0.812	26.000	25.026	24.376
M 27×2	2	1.083	27.000	25.701	24.835
M 27×1.5	1.5	0.812	27.000	26.026	25.376
M 27×1	1	0.541	27.000	26.350	25.917
M 28×2	2	1.083	28.000	26.701	25.835
M 28×1.5	1.5	0.812	28.000	27.026	26.376
M 28×1	1	0.541	28.000	27.350	26.917
M 30×3	3	1.624	30.000	28.051	26.752
M 30×2	2	1.083	30.000	28.701	27.835
M 30×1.5	1.5	0.812	30.000	29.026	28.376
M 30×1	1	0.541	30.000	29.350	28.917
M 32×2	2	1.082	32.000	30.701	29.835
M 32×1.5	1.5	0.812	32.000	31.026	30.376
M 33×3	3	1.624	33.000	31.051	29.752
M 33×2	2	1.083	33.000	31.701	30.835
M 33×1.5	1.5	0.812	33.000	32.026	31.376
M 35×1.5	1.5	0.812	35.000	34.026	33.376
M 36×3	3	1.624	36.000	34.051	32.752
M 36×2	2	1.083	36.000	34.701	33.835
M 36×1.5	1.5	0.812	36.000	35.026	34.376
M 38×1.5	1.5	0.812	38.000	37.026	36.376
M 39×3	3	1.624	39.000	37.051	35.752
M 39×2	2	1.083	39.000	37.701	36.835
M 39×1.5	1.5	0.812	39.000	38.026	37.376
M 40×3	3	1.624	40.000	38.051	36.752
M 40×2	2	1.083	40.000	38.701	37.835
M 40×1.5	1.5	0.812	40.000	39.026	38.376
M 42×4	4	2.165	42.000	39.402	37.670
M 42×3	3	1.624	42.000	40.051	38.752
M 42×2	2	1.083	42.000	40.701	39.835
M 42×1.5	1.5	0.812	42.000	41.026	40.376
M 45×4	4	2.165	45.000	42.402	40.670
M 45×3	3	1.624	45.000	43.051	41.752
M 45×2	2	1.083	45.000	43.701	42.835
M 45×1.5	1.5	0.812	45.000	44.026	43.376
M 48×4	4	2.165	48.000	45.402	43.670
M 48×3	3	1.624	48.000	46.051	44.752
M 48×2	2	1.083	48.000	46.701	45.835
M 48×1.5	1.5	0.812	48.000	47.026	46.376
M 50×3	3	1.624	50.000	48.051	46.752
M 50×2	2	1.083	50.000	48.701	47.835
M 50×1.5	1.5	0.812	50.000	49.026	48.376
M 52×4	4	2.165	52.000	49.402	47.670
M 52×3	3	1.624	52.000	50.051	48.752
M 52×2	2	1.083	52.000	50.701	49.835
M 52×1.5	1.5	0.812	52.000	51.026	50.376
M 55×4	4	2.165	55.000	52.402	50.670
M 55×3	3	1.624	55.000	53.051	51.752
M 55×2	2	1.083	55.000	53.701	52.835
M 55×1.5	1.5	0.812	55.000	54.026	53.376




# Technical Data

## Taper Pipe Threads

Excerpts from JIS B 0203 (1999)

### Reference Thread Shape and Reference Dimension

Reference Thread Shape and Basic Dimension for a Tapered Male/Female Thread

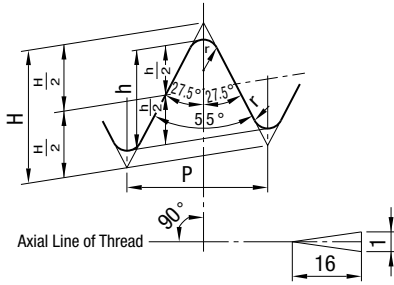

Thick Solid Lines:  
Reference Thread Shape


$$P = \frac{25.4}{n}$$

$$H = 0.960237P$$

$$h = 0.640327P$$

$$r = 0.137278P$$

Reference Thread Shape for a Parallel Female Thread



Thick Solid Lines:  
Reference Thread Shape


$$P = \frac{25.4}{n}$$

$$H' = 0.960491P$$

$$h = 0.640327P$$

$$r' = 0.137329P$$

Fitting together a tapered female thread or parallel female thread and a tapered male thread.

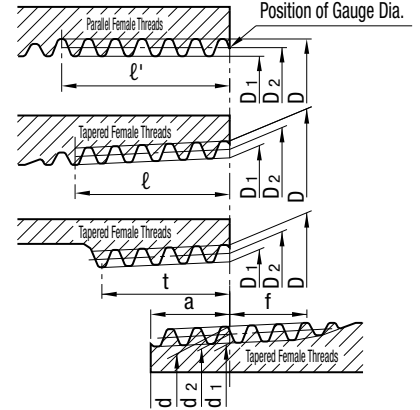

Unit: mm

Nominal of Thread <sup>(1)</sup>	Thread				Gauge Dia.			Position of Gauge Dia.			Length of Effective Thread (Min.)				Carbon Steel for Piping Size of Steel Pipe (Reference)						
	Number of Threads ( $\frac{\text{in}}{25.4 \text{ mm}}$ ) n	Pitch P (Reference)	Thread Height h	Roundness r or r'	Male Thread			Male Thread	Female Thread		From Position of Gauge Dia. Spot to Major Dia. Spot	Female Thread					Outer Diameter	Thickness			
					Outer Dia. d	Effective Dia. d <sub>2</sub>	Minor Dia. d <sub>1</sub>	From Pipe End	Pipe End	With Incomplete Threaded Portion		Without Incomplete Threaded Portion									
												Reference Length	Axial Tolerance	Axial Tolerance					Tapered Female Threads	Parallel Female Threads	Tapered Female Threads, Parallel Female Threads
																			From Position of Gauge Dia. Spot to Minor Dia. Spot ℓ	From pipe end or pipe fitting end ℓ' (Reference)	ℓ <sup>(2)</sup>
Minor Dia. D	Effective Dia. D <sub>2</sub>	Inner Dia. D <sub>1</sub>	a	b	c	f	ℓ	ℓ'	ℓ <sup>(2)</sup>												
R <sup>1</sup> / <sub>16</sub>	28	0.9071	0.581	0.12	7.723	7.142	6.561	3.97	±0.91	±1.13	±0.071	2.5	6.2	7.4	4.4	—	—				
R <sup>1</sup> / <sub>8</sub>	28	0.9071	0.581	0.12	9.728	9.147	8.566	3.97	±0.91	±1.13	±0.071	2.5	6.2	7.4	4.4	10.5	2.0				
R <sup>1</sup> / <sub>16</sub>	19	1.3368	0.856	0.18	13.157	12.301	11.445	6.01	±1.34	±1.67	±0.104	3.7	9.4	11.0	6.7	13.8	2.3				
R <sup>3</sup> / <sub>8</sub>	19	1.3368	0.856	0.18	16.662	15.806	14.950	6.35	±1.34	±1.67	±0.104	3.7	9.7	11.4	7.0	17.3	2.3				
R <sup>1</sup> / <sub>2</sub>	14	1.8143	1.162	0.25	20.955	19.793	18.631	8.16	±1.81	±2.27	±0.142	5.0	12.7	15.0	9.1	21.7	2.8				
R <sup>3</sup> / <sub>4</sub>	14	1.8143	1.162	0.25	26.441	25.279	24.117	9.53	±1.81	±2.27	±0.142	5.0	14.1	16.3	10.2	27.2	2.8				
R1	11	2.3091	1.479	0.32	33.249	31.770	30.291	10.39	±2.31	±2.89	±0.181	6.4	16.2	19.1	11.6	34	3.2				
R <sup>1</sup> / <sub>4</sub>	11	2.3091	1.479	0.32	41.910	40.431	38.952	12.70	±2.31	±2.89	±0.181	6.4	18.5	21.4	13.4	42.7	3.5				
R <sup>1</sup> / <sub>2</sub>	11	2.3091	1.479	0.32	47.803	46.324	44.845	12.70	±2.31	±2.89	±0.181	6.4	18.5	21.4	13.4	48.6	3.5				
R2	11	2.3091	1.479	0.32	59.614	58.135	56.656	15.88	±2.31	±2.89	±0.181	7.5	22.8	25.7	16.9	60.5	3.8				
R <sup>2</sup> / <sub>2</sub>	11	2.3091	1.479	0.32	75.184	73.705	72.226	17.46	±3.46	±3.46	±0.216	9.2	26.7	30.1	18.6	76.3	4.2				
R3	11	2.3091	1.479	0.32	87.884	86.405	84.926	20.64	±3.46	±3.46	±0.216	9.2	29.8	33.3	21.1	89.1	4.2				
R4	11	2.3091	1.479	0.32	113.030	111.551	110.072	25.40	±3.46	±3.46	±0.216	10.4	35.8	39.3	25.9	114.3	4.5				
R5	11	2.3091	1.479	0.32	138.430	136.951	135.472	28.58	±3.46	±3.46	±0.216	11.5	40.1	43.5	29.3	139.8	4.5				
R6	11	2.3091	1.479	0.32	163.830	162.351	160.872	28.58	±3.46	±3.46	±0.216	11.5	40.1	43.5	29.3	165.2	5.0				

Note(1): The nominal of a tapered male thread is given here. For a taper female thread or parallel female thread, R should be replaced with Rc or Rp. (Refer to\*)

(2): Tapered thread: length from position of gauge dia. spot to a minor dia. spot. /Parallel female thread: length from a pipe end or pipe fitting end.

- Reference
- The threads should be at right angles to the central axial line, and the pitch should be measured along the central axial line.
  - The length of the effective thread means the length over which threads are fully provided. A pipe or a pipe fitting may be left in place on the crests of the last few threads. A chamfered end, if any, of a pipe or a pipe fitting should be included in the length of the effective thread.
  - When the value of a, f and t does not meet the requirements, the criteria of other standard is provided.

(\*) Tapered threads type for a pipe are specified as taper male thread for a pipe, taper female thread and parallel female thread for a pipe.

The parallel female thread for a pipe should be mated with a tapered male thread for a pipe, and differs in dimension tolerances from the parallel female thread specified by JIS B 0202.




# Technical Data


## Hexagon Socket Head Cap Screws

Excerpts from JIS B 1176 (1999, 2000)


### 1. Dimensions of Sections

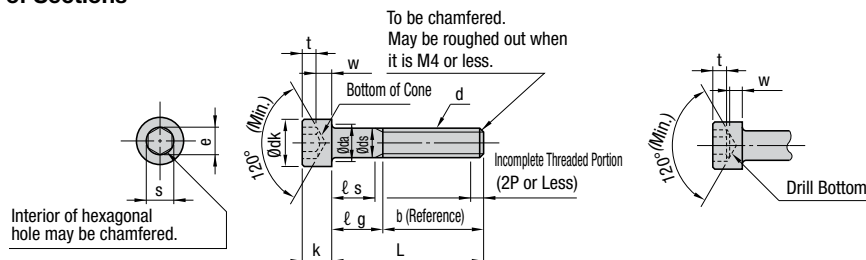

Rounded or Chamfered Head



Max. Rounding Beneath Neck



$$f \text{ (Max.)} = 1.7r \text{ (Max.)}$$

$$r \text{ (Max.)} = \frac{da \text{ (Max.)} - ds \text{ (Max.)}}{2}$$

$$r \text{ (Min.)} = \text{Value in the Attached Table}$$

Unit: mm

Nominal of Thread (d) <sup>(2)</sup>	M2	M2.5	M3	M4	M5	M6	M8	M10	M12	(M14)	M16	(M18)	M20	(M22)	M24	(M27)	M30
<b>Pitch of Thread (P)</b>	0.4	0.45	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	2.5	2.5	3	3	3.5
<b>b Reference</b>	16	17	18	20	22	24	28	32	36	40	44	48	52	56	60	66	72
<b>Max. (Basis)*</b>	3.8	4.5	5.5	7	8.5	10	13	16	18	21	24	27	30	33	36	40	45
<b>dk Max.**</b>	3.98	4.68	5.68	7.22	8.72	10.22	13.27	16.27	18.27	21.33	24.33	27.33	30.33	33.39	36.39	40.39	45.39
<b>Min.</b>	3.62	4.32	5.32	6.78	8.28	9.78	12.73	15.73	17.73	20.67	23.67	26.67	29.67	32.61	35.61	39.61	44.61
<b>da Max.</b>	2.6	3.1	3.6	4.7	5.7	6.8	9.2	11.2	13.7	15.7	17.7	20.2	22.4	24.4	26.4	30.4	33.4
<b>ds Max. (Basis)</b>	2	2.5	3	4	5	6	8	10	12	14	16	18	20	22	24	27	30
<b>Min.</b>	1.86	2.36	2.86	3.82	4.82	5.82	7.78	9.78	11.73	13.73	15.73	17.73	19.67	21.67	23.67	26.67	29.67
<b>e Min.</b>	1.73	2.30	2.87	3.44	4.58	5.72	6.86	9.15	11.43	13.72	16.00	16.00	19.44	19.44	21.73	21.73	25.15
<b>f Max.</b>	0.51	0.51	0.51	0.60	0.60	0.68	1.02	1.02	1.45	1.45	1.45	1.87	2.04	2.04	2.04	2.89	2.89
<b>k Max. (Basis)</b>	2	2.5	3	4	5	6	8	10	12	14	16	18	20	22	24	27	30
<b>Min.</b>	1.86	2.36	2.86	3.82	4.82	5.70	7.64	9.64	11.57	13.57	15.57	17.57	19.48	21.48	23.48	26.48	29.48
<b>r Min.</b>	0.1	0.1	0.1	0.2	0.2	0.25	0.4	0.4	0.6	0.6	0.6	0.6	0.8	0.8	0.8	1	1
<b>s Nominal (Basis)</b>	1.5	2	2.5	3	4	5	6	8	10	12	14	14	17	17	19	19	22
<b>Min.</b>	1.52	2.02	2.52	3.02	4.02	5.02	6.02	8.025	10.025	12.032	14.032	14.032	17.05	17.050	19.065	19.065	22.065
<b>Max.<sup>(1)</sup></b>	<b>Column 1</b>	1.560	2.060	2.580	3.080	4.095	5.140	6.140	8.175	10.175	12.212	14.212	14.212	17.230	17.230	19.275	19.275
	<b>Column 2</b>	1.545	2.045	2.560	3.080	4.095	5.095	6.095	8.115	10.115	12.142	14.142	14.142	17.230	17.230	19.275	19.275
<b>t Min.</b>	1	1.1	1.3	2	2.5	3	4	5	6	7	8	9	10	11	12	13.5	15.5
<b>v Max.</b>	0.2	0.25	0.3	0.4	0.5	0.6	0.8	1	1.2	1.4	1.6	1.8	2	2.2	2.4	2.7	3
<b>dw Min.</b>	3.40	4.18	5.07	6.53	8.03	9.38	12.33	15.33	17.23	20.17	23.17	25.87	28.87	31.81	34.81	38.61	43.61
<b>w Min.</b>	0.55	0.85	1.15	1.4	1.9	2.3	3.3	4	4.8	5.8	6.8	7.7	8.6	9.5	10.4	12.1	13.1

Note <sup>(1)</sup>: Column 1 for s (max.) is applicable to strength class 8.8, 10.9, A 2-50 and A 2-70; Column 2 should be applied to strength class 12.9.

Column 1 may be applicable to strength class 12.9 in accordance with an agreement made between the delivering and receiving sides.

When the nominal of thread is M20 or larger, s (max.) should be applied to all strength classes.

Note <sup>(2)</sup>: Nominal of thread in brackets should not be used unless it is absolutely necessary.

Reference 1. A side of the head should be knurled into a straight line or crisscross pattern [ refer to JIS B 0951 (knurling pattern) ]. dk(max.) should be the value marked with\*\*.

If no knurled pattern is needed, purchasers can indicate that. However, dk(max.) should be the value marked with\*.

2. Recommended nominal lengths (L) for individual nominal of thread are shown within the bold lines.

If L is shorter than the dotted line, the thread should be fully threaded, and the incompletely threaded part length beneath the neck should be approximately 3P.

3. lg (max.) and lg (min.) for a screw, whose length (L) exceeds the dotted line, are obtained by the equations below:

$$lg(\text{Max}) = \text{Nominal Length}(L) - b$$


$$lg(\text{Min}) = lg(\text{Max}) - 5P$$

2. L, s and g of Hexagon Socket Head Cap Screws

Unit: mm

Nominal of Thread (d)		M2	M2.5	M3	M4	M5	M6	M8	M10	M12	M14	M16	(M18)	M20	(M22)	M24	(M27)	M30																			
L		ℓs min and ℓg max																																			
Nominal Length	min	max	ℓs min	ℓg max	ℓs min	ℓg max	ℓs min	ℓg max	ℓs min	ℓg max	ℓs min	ℓg max	ℓs min	ℓg max	ℓs min	ℓg max	ℓs min	ℓg max	ℓs min	ℓg max	ℓs min	ℓg max	ℓs min	ℓg max	ℓs min	ℓg max	ℓs min	ℓg max	ℓs min	ℓg max							
5	4.76	5.24																																			
6	5.76	6.24																																			
8	7.71	8.29																																			
10	9.71	10.29																																			
12	11.65	12.35																																			
16	15.65	16.35																																			
20	19.58	20.42	2	4																																	
25	24.58	25.42		5.75	8	4.5	7																														
30	29.58	30.42			9.5	12	6.5	10	4	8																											
35	34.5	35.5				11.5	15	9	13	6	11																										
40	39.5	40.5				16.5	20	14	18	11	16	5.75	12																								
45	44.5	45.5						19	23	16	21	10.75	17	5.5	13																						
50	49.5	50.5						24	28	21	26	15.75	22	10.5	18																						
55	54.4	55.6							26	31	31	20.75	27	15.5	23	10.25	19																				
60	59.4	60.6							31	36	36	25.75	32	20.5	28	15.25	24	10	20																		
65	64.4	65.6								30.75	37	30.75	37	25.5	33	20.25	29	15	25	11	21	4.5	17														
70	69.4	70.6								35.75	42	30.5	38	30.5	38	25.25	34	20	30	16	26	9.5	22														
80	79.4	80.6								45.75	52	40.5	48	35.25	44	30	40	26	36	19.5	32	15.5	28	11.5	24												
90	89.3	90.7								50.5	58	45.25	54	40	50	36	46	29.5	42	25.5	38	21.5	34	15	30	9	24										
100	99.3	100.7								60.5	68	55.25	64	50	60	46	56	39.5	52	35.5	48	31.5	44	25	40	19	34										
110	109.3	110.7								66.25	74	60	70	56	66	49.5	62	45.5	58	41.5	54	35	50	29	44	20.5	38										
120	119.3	120.7								75.25	84	70	80	66	76	59.5	72	55.5	68	51.5	64	45	60	39	54	30.5	48										
130	129.2	130.8									80	90	76	86	69.5	82	65.5	78	61.5	74	55	70	49	64	40.5	58											
140	139.2	140.8										90	100	86	96	79.5	92	75.5	88	71.5	84	65	80	59	74	50.5	68										
150	149.2	150.8											96	106	89.5	102	85.5	98	81.5	94	75	90	69	84	60.5	78											
160	159.2	160.8											106	116	99.5	112	95.5	108	91.5	104	85	100	79	94	70.5	88											
180	179.2	180.8												119.5	132	115.5	128	111.5	124	105	120	99	114	90.5	108												
200	199.05	200.95													135.5	148	131.5	144	125	140	119	134	110.5	128													
220	219.05	220.95																						139	154	130.5	148										
240	239.05	240.95																							159	174	150.5	168									
260	258.95	261.05																								179	194	170.5	188								
280	278.95	281.05																									199	214	190.5	208							
300	298.95	301.05																									219	234	210.5	228							

Reference: Dimensions of Counterboring and Bolt Hole for the Hexagon Socket Head Cap Screws

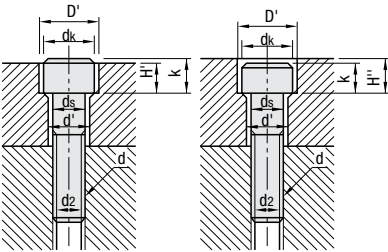

Nominal of Thread (d)	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22	M24	M27	M30
ds	3	4	5	6	8	10	12	14	16	18	20	22	24	27	30
d'	3.4	4.5	5.5	6.6	9	11	14	16	18	20	22	24	26	30	33
dk	5.5	7	8.5	10	13	16	18	21	24	27	30	33	36	40	45
D'	6.5	8	9.5	11	14	17.5	20	23	26	29	32	35	39	43	48
k	3	4	5	6	8	10	12	14	16	18	20	22	24	27	30
H'	2.7	3.6	4.6	5.5	7.4	9.2	11	12.8	14.5	16.5	18.5	20.5	22.5	25	28
H''	3.3	4.4	5.4	6.5	8.6	10.8	13	15.2	17.5	19.5	21.5	23.5	25.5	29	32
d2	2.6	3.4	4.3	5.1	6.9	8.6	10.4	12.2	14.2	15.7	17.7	19.7	21.2	24.2	26.7



# Technical Data

## Proper Bolt Axial Tightening Force and Proper Tightening Torque

### ■ Axial Tightening Force for Bolt and Fatigue Limit

- The proper axial tightening force for a bolt should be calculated within an elasticity range up to 70% of the rated yield strength when the torque method is used.
- The fatigue strength of bolt under repeated load should not exceed the specified tolerance.
- Do not let the seat of a bolt or nut dent the contact area.
- Do not break the tightened piece by tightening.

A bolt is tightened by torque, torque inclination, rotating angle, stretch measurement and other methods. The torque method is widely used due to its simplicity and convenience.

### ■ Calculation of Axial Tightening Force and Tightening Torque

The relation between the axial tightening force and Ff is represented by Equation (1) below:

$$Ff = 0.7 \times \sigma_y \times A_s \dots (1)$$

Tightening torque T<sub>ts</sub> can be obtained by using the following formula(2).

$$T_{ts} = 0.35k(1+1/Q)\sigma_y \cdot A_s \cdot d \dots (2)$$

k : Torque Coefficient

d : Nominal Diameter of Bolt [cm]

Q : Tightening Coefficient

σ<sub>y</sub> : Tensile strength (When the strength class is 12.9, it is 112kgf/mm<sup>2</sup>)

A<sub>s</sub> : Effective Sectional Area of the Bolt [mm<sup>2</sup>]

### ■ Calculation Example

Proper torque and axial force for Mild steel pieces tightened together by means of a hexagon socket head cap screw, M6 (strength class 12.9), with the pieces lubricated with oil can be calculated.

- Proper Torque, by using Equation (2)

$$T_{ts} = 0.35k(1+1/Q)\sigma_y \cdot A_s \cdot d$$

$$= 0.35 \cdot 0.17(1+1/1.4) 1098 \cdot 20.1 \cdot 0.6$$

$$= 1351 [N \cdot cm] \{138 [kgf \cdot cm]\}$$

- Axial Force Ff, by using Equation(1)


$$Ff = 0.7 \times \sigma_y \times A_s$$

$$= 0.7 \times 1098 \times 20.1$$

$$= 15449 [N] \{1576 [kgf]\}$$

### ■ Surface Treatment for Bolt and Torque Coefficient Dependent on the Combination of Material for Area to be Fastened and Material of Female Thread

Bolt Surface Treatment Lubrication	Torque Coefficient k	Combination of material for area to be fastened and material for female thread					
		(a)	(b)	(a)	(b)	(a)	(b)
Steel Bolt Black Oxided Film Oil Lubrication	0.145	SCM-FC	FC-FC	SUS-FC			
	0.155	S10C-FC	SCM-S10C	SCM-SCM	FC-S10C	FC-SCM	
	0.165	SCM-SUS	FC-SUS	AL-FC	SUS-S10C	SUS-SCM	SUS-SUS
	0.175	S10C-S10C	S10C-SCM	S10C-SUS	AL-S10C	AL-SCM	
	0.185	SCM-AL	FC-AL	AL-SUS			
	0.195	S10C-AL	SUS-AL				
Steel Bolt Black Oxided Film Unlubricated	0.215	AL-AL					
	0.25	S10C-FC	SCM-FC	FC-FC			
	0.35	S10C-SCM	SCM-SCM	FC-S10C	FC-SCM	AL-FC	
	0.45	S10C-S10C	SCM-S10C	AL-S10C	AL-SCM		
0.55	SCM-AL	FC-AL	AL-AL				



S10C: Mild steel not thermally refined  
FC: Cast Iron(FC200)  
SCM: Thermally Refined Steel(35HRC)  
AL: Aluminum  
SUS: Stainless Steel

### ■ Standard Value of Tightening Coefficient Q

Tightening Coefficient Q	Tightening Method	Surface Condition		Lubrication
		Bolts	Nuts	
1.25	Torque Wrench	Manganese Phosphate		
1.4	Torque Wrench	Not treated or Treated with Phosphate.	Not treated or Treated with Phosphate.	Lubricated with oil or MoS <sub>2</sub> paste
	Limited-Torque Wrench			
1.6	Impact Wrench			
1.8	Torque Wrench	Not treated or Treated with Phosphate.	No Treatment	Unlubricated
	Limited-Torque Wrench			

Strength Class

Ex. 12.9

└─ Tensile Strength (Yield Stress): 90% of the minimum value of tensile strength  
└─ The minimum value of tensile strength is 1220N/mm<sup>2</sup> { 124kgf/mm<sup>2</sup> }

10.9

└─ Tensile Strength (Yield Stress): 90% of the minimum value of tensile strength  
└─ The minimum value of tensile strength is 1040N/mm<sup>2</sup> { 106kgf/mm<sup>2</sup> }

### ■ Initial Tightening Force and Tightening Torque

Nominal of Thread	Effective Sectional Area A <sub>s</sub> mm <sup>2</sup>	Strength Class								
		12.9			10.9			8.8		
		Yield Load	Initial Tightening Force	Tightening Torque	Yield Load	Initial Tightening Force	Tightening Torque	Yield Load	Initial Tightening Force	Tightening Torque
		N {kgf}	N {kgf}	N · cm {kgf · cm}	N {kgf}	N {kgf}	N · cm {kgf · cm}	N {kgf}	N {kgf}	N · cm {kgf · cm}
M 3×0.5	5.03	5517 { 563 }	3861 { 394 }	167 { 17 }	4724 { 482 }	3312 { 338 }	147 { 15 }	3214 { 328 }	2254 { 230 }	98 { 10 }
M 4×0.7	8.78	9633 { 983 }	6742 { 688 }	392 { 40 }	8252 { 842 }	5772 { 589 }	333 { 34 }	5615 { 573 }	3930 { 401 }	225 { 23 }
M 5×0.8	14.2	15582 { 1590 }	10907 { 1113 }	794 { 81 }	13348 { 1362 }	9339 { 953 }	676 { 69 }	9085 { 927 }	6360 { 649 }	461 { 47 }
M 6×1	20.1	22060 { 2251 }	15445 { 1576 }	1352 { 138 }	18894 { 1928 }	13220 { 1349 }	1156 { 118 }	12867 { 1313 }	9006 { 919 }	784 { 80 }
M 8×1.25	36.6	40170 { 4099 }	28116 { 2869 }	3273 { 334 }	34398 { 3510 }	24079 { 2457 }	2803 { 286 }	23422 { 2390 }	16395 { 1673 }	1911 { 195 }
M10×1.5	58	63661 { 6496 }	44561 { 4547 }	6497 { 663 }	54508 { 5562 }	38161 { 3894 }	5557 { 567 }	37113 { 3787 }	25980 { 2651 }	3783 { 386 }
M12×1.75	84.3	92532 { 9442 }	64768 { 6609 }	11368 { 1160 }	79223 { 8084 }	55458 { 5659 }	9702 { 990 }	53949 { 5505 }	37759 { 3853 }	6605 { 674 }
M14×2	115	126224 { 12880 }	88357 { 9016 }	18032 { 1840 }	108084 { 11029 }	75656 { 7720 }	15484 { 1580 }	73598 { 7510 }	51519 { 5257 }	10486 { 1070 }
M16×2	157	172323 { 17584 }	117982 { 12039 }	28126 { 2870 }	147549 { 15056 }	103282 { 10539 }	24108 { 2460 }	100470 { 10252 }	70325 { 7176 }	16366 { 1670 }
M18×2.5	192	210739 { 21504 }	147519 { 15053 }	38710 { 3950 }	180447 { 18413 }	126312 { 12889 }	33124 { 3380 }	126636 { 12922 }	88641 { 9045 }	23226 { 2370 }
M20×2.5	245	268912 { 27440 }	188238 { 19208 }	54880 { 5600 }	230261 { 23496 }	161181 { 16447 }	46942 { 4790 }	161592 { 16489 }	113112 { 11542 }	32928 { 3360 }
M22×2.5	303	332573 { 33936 }	232799 { 23755 }	74676 { 7620 }	284768 { 29058 }	199332 { 20340 }	63896 { 6520 }	199842 { 20392 }	139885 { 14274 }	44884 { 4580 }
M24×3	353	387453 { 39536 }	271215 { 27675 }	94864 { 9680 }	331759 { 33853 }	232231 { 23697 }	81242 { 8290 }	232819 { 23757 }	162974 { 16630 }	57036 { 5820 }

(Note) • Tightening Conditions: Use of a torque wrench (Lubricated with Oil, Torque Coefficient k=0.17, Tightening Coefficient Q=1.4) • The torque coefficient varies with the conditions of use. Values in this table should be used as rough referential values. • The table is an excerpt from a catalog of Kyokuto Seisakusho Co., Ltd.



# Technical Data

## Strength of Bolts, Screw Plugs and Dowel Pins

### ■ Strength of Bolt

1) Tensile Load Bolt

$$P = \sigma t \times A_s \dots \dots \dots (1)$$

$$= \pi d^2 \sigma t / 4 \dots \dots \dots (2)$$

Pt : Tensile Load in the Axial Direction [N]  
 $\sigma b$  : Yield Stress of the Bolt [N/mm<sup>2</sup>]  
 $\sigma t$  : Allowable Stress of the Bolt [N/mm<sup>2</sup>]  
 ( $\sigma t = \sigma b / \text{Safety Factor} \alpha$ )  
 $A_s$  : Effective Sectional Area of the Bolt [mm<sup>2</sup>]  
 $A_s = \pi d^2 / 4$   
 $d$  : Effective Dia. of the Bolt (Core Dia.) [mm]


(Ex.) The proper size of a hexagon socket head cap screws, which is to bear a repeated tensile load (pulsating) at  $P=1960\text{N}$  {200 kgf}, should be determined. (The hexagon socket head cap screws are 4137 Alloy Steel, 38 to 43 HRC, strength class 12.9)

(1) Using Equation

$$A_s = P / \sigma t$$

$$= 1960 / 219.6$$

$$= 8.9 \text{ [mm}^2\text{]}$$



∴ By finding a value greater than the result of the equation in the Effective Sectional Area column in the table on the right, M5, 14.2[mm<sup>2</sup>], should be selected.

M6, allowable load of 2087N {213 kgf}, should be selected from the column for strength class 12.9, with the fatigue strength taken into account.

2) If the bolt, like a stripper bolt, is to bear a tensile impact load, the right size should be selected from the fatigue strength column. (Under a load of 1960N {200kgf}, stripper bolt made of 4137 Alloy Steel, 33 to 38 HRC, strength class 10.9)

By finding a value greater than the allowable load of 1960N {200 kgf} in the Strength Class 10.9 column in the table on right, M8, 3116[N] {318[kgf]}, should be selected. Hence, MSB10 with the M8 threaded portion and an axial diameter of 10 mm should be selected. If it is to bear a shearing load, a dowel pin should also be used.

### ■ Strength of Screw Plug

When screw plug MSW30 is to bear an impact load, allowable load P should be determined. (The materials of MSW30 are 1045 Carbon Steel, 34 to 43 HRC, tensile strength  $\sigma t$  637N/mm<sup>2</sup> {65kgf/mm<sup>2</sup>})

If M S W is shorn at a spot within the root diameter section and is broken, allowable load P can be calculated as shown below.

$$\text{Allowable Load } P = \tau t \times A$$

$$= 3.9 \times 107.4$$

$$= 40812 \text{ [N] } \{ 4164 \text{ [kgf]} \}$$

Find the allowable shearing force base on the core diameter of female thread if a tap is made of soft material.

Area A=Root Diameter  $d_1 \times \pi \times L$   
 (Root Diameter  $d_1 = M - P$ )  
 $A = (M - P) \pi L = (30 - 1.5) \pi \times 12$   
 $= 1074 \text{ [mm}^2\text{]}$   
 Yield Stress =  $0.9 \times$  Tensile Strength  $\sigma$   
 $b = 0.9 \times 637 = 573 \text{ [N/mm}^2\text{]}$   
 Shearing Stress =  $0.8 \times$  Yield Stress  
 $= 459 \text{ [N/mm}^2\text{]}$   
 Allowable Shearing Stress  
 $\tau t = \text{Shearing Stress} / \text{Safety Factor } 12$   
 $= 459 / 12 = 38 \text{ [N/mm}^2\text{]} \{ 3.9 \text{ [kgf/mm}^2\text{]} \}$

### ■ Strength of Dowel Pins

The proper size of a dowel pin under repeated shearing load of 7840N {800 kgf} (Pulsating) should be determined.

(The material of Dowel Pins is 52100 Bearing Steel. Hardness 58HRC-)

$$P = A \times \tau$$

$$= \pi D^2 \tau / 4$$

$$D = \sqrt{(4P) / (\pi \tau)}$$

$$= \sqrt{(4 \times 7840) / (3.14 \times 188)}$$

$$\approx 7.3$$

∴ D8 or a larger size should be selected for MS.

If the dowel pins are of a roughly uniform size, the number of the necessary tools and extra pins can be reduced.

Yield Stress for 52100 Bearing Steel  
 $\sigma b = 1176 \text{ [N/mm}^2\text{]} \{ 120 \text{ [kgf/mm}^2\text{]} \}$   
 Allowable Shearing Strength  
 $\tau = \sigma b \times 0.8 / \text{Safety Factor } \alpha$   
 $= 1176 \times 0.8 / 5$   
 $= 188 \text{ [N/mm}^2\text{]} \{ 19.2 \text{ [kgf/mm}^2\text{]} \}$

### ■ Safety Factor $\alpha$ of Unwin Based on Tensile Strength

Materials	Static Load	Repeated Load		Impact Load
		Pulsating	Reversed	
Steel	3	5	8	12
Cast Iron	4	6	10	15
Copper, Soft Metal	5	5	9	15



Allowable Stress =  $\frac{\text{Reference Strength}}{\text{Safety Factor } \alpha}$       Reference Strength: Yield Stress for Ductile Material  
 Fracture Stress for Fragile Material

The yield stress, strength class 12.9, is  $\sigma b = 1098 \text{ [N/mm}^2\text{]} \{ 112 \text{ [kgf/mm}^2\text{]} \}$ .  
 Allowable Stress  $\sigma t = \sigma b / \text{Safety Factor}$  (from the above table Safety Factor 5)  
 $= 1098 / 5$   
 $= 219.6 \text{ [N/mm}^2\text{]} \{ 22.4 \text{ [kgf/mm}^2\text{]} \}$

### ■ Fatigue Strength of Bolt (Thread: Fatigue Strength is 2 million times)

Nominal of Thread	Effective Sectional Area as mm <sup>2</sup>	Strength Class			
		12.9		10.9	
		Fatigue Strength <sup>1</sup> [kgf/mm <sup>2</sup> ]	Allowable Load N (kgf)	Fatigue Strength <sup>1</sup> [kgf/mm <sup>2</sup> ]	Allowable Load N (kgf)
M 4	8.78	128 { 13.1 }	1117 { 114 }	89 { 9.1 }	774 { 79 }
M 5	14.2	111 { 11.3 }	1568 { 160 }	76 { 7.8 }	1088 { 111 }
M 6	20.1	104 { 10.6 }	2087 { 213 }	73 { 7.4 }	1460 { 149 }
M 8	36.6	87 { 8.9 }	3195 { 326 }	85 { 8.7 }	3116 { 318 }
M10	58	73 { 7.4 }	4204 { 429 }	72 { 7.3 }	4145 { 423 }
M12	84.3	66 { 6.7 }	5537 { 565 }	64 { 6.5 }	5370 { 548 }
M14	115	60 { 6.1 }	6880 { 702 }	59 { 6 }	6762 { 690 }
M16	157	57 { 5.8 }	8928 { 911 }	56 { 5.7 }	8771 { 895 }
M20	245	51 { 5.2 }	12485 { 1274 }	50 { 5.1 }	12250 { 1250 }
M24	353	46 { 4.7 }	16258 { 1659 }	46 { 4.7 }	16258 { 1659 }

Fatigue strength<sup>1</sup> is a revision of an excerpt from "Estimated Fatigue Limits of Small Screws, Bolts and Metric Screws for Nuts" (Yamamoto).

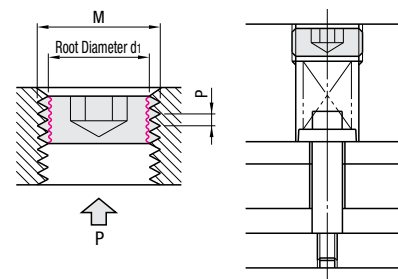

The dowel pin must not be loaded.


Typical strength calculations are presented here. In practice, further conditions including hole-to-hole pitch precision, hole perpendicularity, surface roughness, circularity, plate material, parallelism, quenching or non-quenching, precision of the press, product output, wear of tools should be considered. Hence the values in these examples are typical but not guaranteed values.



# Technical Data

## Hexagon Socket Set Screws (Flat Type)

### 1. Shape and Dimension of Hexagon Socket Set Screws and Its Flat End (JIS B 1177-1997).

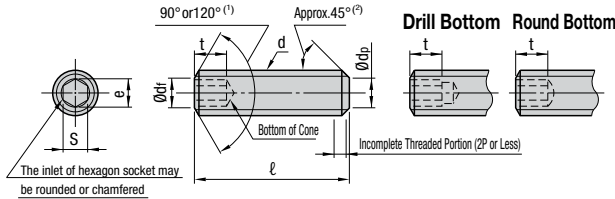

Note (1): Should be chamfered to 120° if l falls short of the dotted line, which forms stairs, in the table.  
 (2): 45° Slanted portion below the trough diameter line of the male thread.

Nominal of Thread(d)		M2	M3	M4	M5	M6	M8	M10	M12	M16	M20	M24	
Pitch (P)		0.4	0.5	0.7	0.8	1.0	1.25	1.5	1.75	2.0	2.5	3.0	
d <sub>p</sub>	Max. (Reference Dimension)	1.0	2.0	2.5	3.5	4.0	5.5	7.0	8.5	12.0	15.0	18.0	
	Min.	0.75	1.75	2.25	3.2	3.7	5.2	6.64	8.14	11.57	14.57	17.57	
d <sub>f</sub>	Approx.	Thread Bottom Diameter of Male Thread											
e	Min. <sup>(3)</sup>	1.003	1.73	2.30	2.87	3.44	4.58	5.72	6.86	9.15	11.43	13.72	
s	Nominal (Reference Dimension)	0.9	1.5	2.0	2.5	3.0	4.0	5.0	6.0	8.0	10.0	12.0	
	Max.	0.902	1.545	2.045	2.560	3.080	4.095	5.095	6.095	8.115	10.115	12.142	
	Min.	0.889	1.520	2.020	2.520	3.020	4.020	5.020	6.020	8.025	10.025	12.032	
t	Min. <sup>(4)</sup>	Column 1	0.8	1.2	1.5	2.0	2.0	3.0	4.0	4.8	6.4	8.0	10.0
		Column 2	1.7	2.0	2.5	3.0	3.5	5.0	6.0	8.0	10.0	12.0	15.0
ℓ(5)		Approx. Mass Per 1000 Units											
Nominal Length (Reference Dimension)	Min.	Unit:kg (Density:7.85kg/dm <sup>3</sup> )											
	Max.												
2	1.8	2.2	0.029	0.059									
2.5	2.3	2.7	0.037	0.08	0.099								
3	2.8	3.2	0.044	0.1	0.14	0.2							
4	3.7	4.3	0.059	0.14	0.22	0.32	0.41						
5	4.7	5.3	0.074	0.18	0.3	0.44	0.585	0.945					
6	5.7	6.3	0.089	0.22	0.38	0.56	0.76	1.26	1.77				
8	7.7	8.3	0.119	0.3	0.54	0.8	1.11	1.89	2.78	4			
10	9.7	10.3	0.148	0.38	0.7	1.04	1.46	2.52	3.78	5.4	8.5		
12	11.6	12.4		0.46	0.86	1.28	1.81	3.15	4.78	6.8	11.1	15.8	
16	15.6	16.4		0.62	1.18	1.76	2.51	4.41	6.78	9.6	16.3	24.1	30
20	19.6	20.4			1.49	2.24	3.21	5.67	8.76	12.4	21.5	32.3	42
25	24.6	25.4				2.84	4.09	7.25	11.2	15.9	28	42.6	57
30	29.6	30.4					4.97	8.82	13.7	19.4	34.6	52.9	72
35	34.5	35.5						10.4	16.2	22.9	41.1	63.2	87
40	39.5	40.5						12	18.7	26.4	47.7	73.5	102
45	44.5	45.5							21.2	29.9	54.2	83.8	117
50	49.5	50.5							23.7	33.4	60.7	94.1	132
55	54.4	55.6								36.8	67.3	104	147
60	59.4	60.6								40.3	73.7	115	162

Note (3): when e min.=1.14×s(min.) Excluding nominal of thread M25 or less for screws.

(4): The values in Column 1 for t min. are applicable to the nominal lengths (l) falling short of the dotted border, and the values in Column 2 to the nominal lengths beyond the border.

(5): Min.rand max. are based on JIS B 1021. They are rounded to the first digit below zero.

Reference 1. Recommended nominal lengths (l) for individual nominal of thread are enclosed by thick lines.

If the required l-value is not given in the table, it should be specified by the ordering side.

2. The shape and dimensions of the flat end of the screw are based on JIS B 1003 (shape and dimensions of the end of the screw).

3. The shape of the hexagon socket bottom may be a conical, drill or round bottom.

The shape and dimensions indicated in the reference table are based on ISO 4026-1977.






# Technical Data

## Hexagon Bolts

Excerpts from JIS B 1180 (1999)

### 1. Shape and Dimensions of Hexagon Bolt (Parts Grade A)

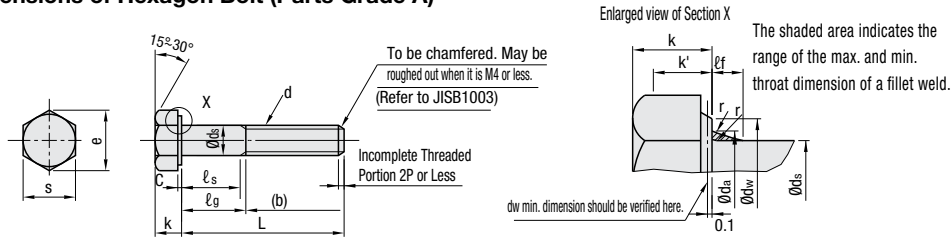

Unit: mm

Nominal of Thread d	Coarse Thread Column I	M2	M3	M4	M5	M6	M8	M10	M12	—	M16	M20	M24
	Coarse Thread Column II	—	—	—	—	—	—	—	—	M14	—	—	—
	Coarse Thread Pitch P	0.4	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2	2.5	3
	Fine Thread Column I	—	—	—	—	—	M8×1	M10×1	M12×1.5	—	M16×1.5	M20×1.5	M24×2
Fine Thread Column II	—	—	—	—	—	—	M10×1.25	M12×1.25	M14×1.5	—	M20×2	—	
b (Reference)	L ≤ 125mm 125 < L ≤ 150mm	10	12	14	16	18	22	26	30	34	38	46	54
c	Min.	0.1	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.2	0.2	0.2
	Max.	0.25	0.4	0.4	0.5	0.5	0.6	0.6	0.6	0.6	0.8	0.8	0.8
da	Max.	2.6	3.6	4.7	5.7	6.8	9.2	11.2	13.7	15.7	17.7	22.4	26.4
ds	Reference Dimension=Max.	2	3	4	5	6	8	10	12	14	16	20	24
	Min.	1.86	2.86	3.82	4.82	5.82	7.78	9.78	11.73	13.73	15.73	19.67	23.67
dw	Min.	3.07	4.57	5.88	6.88	8.88	11.63	14.63	16.63	*19.64	22.49	28.19	33.61
e	Min.	4.32	6.01	7.66	8.79	11.05	14.38	17.77	20.03	23.36	26.75	33.53	39.98
ℓf	Max.	0.8	1	1.2	1.2	1.4	2	2	3	3	3	4	4
k	Reference Dimension=Nominal	1.4	2	2.8	3.5	4	5.3	6.4	7.5	8.8	10	12.5	15
	Min.	1.275	1.875	2.675	3.35	3.85	5.15	6.22	7.32	8.62	9.82	12.285	14.785
	Max.	1.525	2.125	2.925	3.65	4.15	5.45	6.58	7.68	8.98	10.18	12.715	15.215
k'	Min.	0.89	1.31	1.87	2.35	2.7	3.61	4.35	5.12	6.03	6.87	8.6	10.35
r	Min.	0.1	0.1	0.2	0.2	0.25	0.4	0.4	0.6	0.6	0.6	0.8	0.8
s	Reference Dimension=Max.	4	5.5	7	8	10	13	16	18	21	24	30	36
	Min.	3.82	5.32	6.78	7.78	9.78	12.73	15.73	17.73	20.67	23.67	29.67	35.38

Length of Bolt L			ℓs and ℓg																												
Nominal Length (Reference Dimension)	Min.	Max.	ℓs		ℓg		ℓs		ℓg		ℓs		ℓg		ℓs		ℓg		ℓs		ℓg		ℓs		ℓg		ℓs		ℓg		
			Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	
16	15.65	16.35	4	6																											
20	19.58	20.42	8	10																											
25	24.58	25.42			5.5	8																									
30	29.58	30.42			10.5	13	7.5	11	5	9																					
35	34.5	35.5			15.5	18	12.5	16	10	14	7	12																			
40	39.5	40.5					17.5	21	15	19	12	17																			
45	44.5	45.5					22.5	26	20	24	17	22	11.75	18																	
50	49.5	50.5						25	29	22	27	16.75	23	11.5	19																
55	54.4	55.6						30	34	27	32	21.75	28	16.5	24	11.25	20														
60	59.4	60.6							32	37	26.75	33	21.5	29	16.25	25															
65	64.4	65.6							37	42	31.75	38	26.5	34	21.25	30	16	26													
70	69.4	70.6											36.75	43	31.5	39	26.25	35	21	31	17	27									
80	79.4	80.6											41.75	48	36.5	44	31.25	40	26	36	22	32									
90	89.3	90.7											51.75	58	46.5	54	41.25	50	36	46	32	42	21.5	34							
100	99.3	100.7													56.5	64	51.25	60	46	56	42	52	31.5	44	21	36					
110	109.3	110.7													66.5	74	61.25	70	56	66	52	62	41.5	54	31	46					
120	119.3	120.7															71.25	80	66	76	62	72	51.5	64	41	56					
130	129.2	130.8															81.25	90	76	86	72	82	61.5	74	51	66					
140	139.2	140.8																	80	90	76	86	65.5	78	55	70					
150	149.2	150.8																	90	100	86	96	75.5	88	65	80					
																				96	106	85.5	98	75	90						

- Reference
- Priority should be given to the nominal of thread in Column I. The screw size codes are based on JIS B 0123.
  - Recommended nominal lengths(L) for individual nominal of thread are enclosed by thick lines.
  - When the thread part length (b) of a bolt exceeds the max. nominal value given within the thick lines, the tolerance of the thread part length should be agreed upon by the delivering and receiving sides, corresponding to JIS B 1021.
  - Max. value ℓg and Min. value ℓs as follows: ℓg max Nominal Length(L)-b, ℓs min.=ℓg max-5P(P=Coarse Thread Pitch)
  - da and r in this table are based on JIS B 1005.
  - "Chamfered" and "Unpointed", the shape of the end screw should be decided according to JIS B 1003.
  - The asterisked figures in the table are values after correction with the relevant international standard.

\*With some of the hexagon bolts and hexagon nuts for M10 and M12 distributed at present, the opposite side S is based on JIS prior to the revision.




# Technical Data

## Hexagon Nuts / Cotter Pins

Excerpts from JIS B 1181 (1995)  
Excerpts from JIS B 1351 (1987)


### 1. Shape and Dimensions of Hexagon Nuts Style I (Parts Grade A)

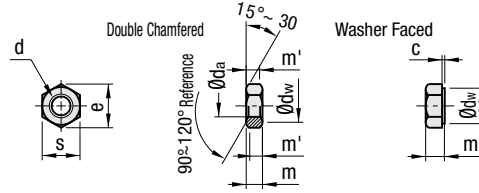

Unit: mm

Nominal of Thread d	M2	M3	M4	M5	M6	M8	M10	M12	(M14)	M16
Pitch P	0.4	0.5	0.7	0.8	1	1.25	1.5	1.75	2	2
c	Max.	0.2	0.4	0.4	0.5	0.6	0.6	0.6	0.6	0.8
	Min.	0.1	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.2
d <sub>s</sub>	Min.(Reference Dimension)	2	3	4	5	6	8	10	12	16
	Max.	2.3	3.45	4.6	5.75	6.75	8.75	10.8	13	17.3
d <sub>w</sub>	Min.	3.07	4.6	5.9	6.9	8.9	11.6	14.6	16.6	22.5
	Min.	4.32	6.01	7.66	8.79	11.05	14.38	17.77	20.03	26.75
e	Max.(Reference Dimension)	1.6	2.4	3.2	4.7	5.2	6.8	8.4	10.8	14.8
	Min.	1.35	2.15	2.9	4.4	4.9	6.44	8.04	10.37	14.1
m'	Min.	1.08	1.72	2.32	3.52	3.92	5.15	6.43	8.3	9.68
	Max.(Reference Dimension)	4	5.5	7	8	10	13	16	18	24
s	Min.	3.82	5.32	6.78	7.78	9.78	12.73	15.73	17.73	23.67
	Max.	4	5.5	7	8	10	13	16	18	24

### 2. Shape and Dimensions of Hexagon Nuts Style II (Parts Grade A)

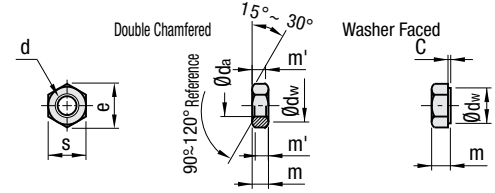

Unit: mm

Nominal of Thread d	M5	M6	M8	M10	M12	(M14)	M16
Pitch P	0.8	1	1.25	1.5	1.75	2	2
c	Max.	0.5	0.5	0.6	0.6	0.6	0.8
	Min.	0.15	0.15	0.15	0.15	0.15	0.2
d <sub>s</sub>	Min.(Reference Dimension)	5	6	8	10	12	16
	Max.	5.75	6.75	8.75	10.8	13	17.3
d <sub>w</sub>	Min.	6.9	8.9	11.6	14.6	16.6	22.5
	Min.	8.79	11.05	14.38	17.77	20.03	26.75
e	Max.(Reference Dimension)	5.1	5.7	7.5	9.3	12	16.4
	Min.	4.8	5.4	7.14	8.94	11.57	15.7
m'	Min.	3.84	4.32	5.71	7.15	9.26	12.6
	Max.(Reference Dimension)	8	10	13	16	18	24
s	Min.	7.78	9.78	12.73	15.73	17.73	23.67
	Max.	8	10	13	16	18	24


Reference 1. Nominal of thread in brackets should not be used unless it is absolutely necessary.

2. The shape of nuts, unless otherwise designated, shall be "double chamfered", and the "washer faced" shall be as designated by the purchaser.

Chamfering for the "washer faced" threads shall be based on the chamfered dimensions for "double chamfered".


\*With some of the hexagon bolts and hexagon nuts for M10 and M12 distributed at present, the opposite side S is based on JIS prior to the revision.

### 3. Shape and Dimensions of Cotter Pins



Unit: mm

Nominal Diameter	0.6	0.8	1	1.2	1.6	2	2.5	3.2	4	5	6.3	8	10	13	16	20	
d	Reference Dimension	0.5	0.7	0.9	1	1.4	1.8	2.3	2.9	3.7	4.6	5.9	7.5	9.5	12.4	15.4	19.3
	Tolerance			0	-0.1						0	-0.2				0	-0.3
c	Reference Dimension	1	1.4	1.8	2	2.8	3.6	4.6	5.8	7.4	9.2	11.8	15	19	24.8	30.8	38.6
	Tolerance	0	-0.1	0	-0.3	0	-0.4	0	-0.6	0	-0.9	0	-1.5	-1.9	-2.4	-3.1	-3.8
b	Approx.	2	2.4	3	3	3.2	4	5	6.4	8	10	12.6	16	20	26	32	40
	Approx.	1.6	1.6	1.6	2.5	2.5	2.5	3.2	4	4	4	4	6.3	6.3	6.3	6.3	
a	Over than or Less	-	2.5	3.5	4.5	5.5	7	9	11	14	20	27	39	56	80	120	170
	Over than or Less	-	2	3	4	5	6	8	9	12	17	23	29	44	69	110	160
Di. of Pin Hole (Reference)	0.6	0.8	1	1.2	1.6	2	2.5	3.2	4	5	6.3	8	10	13	16	20	

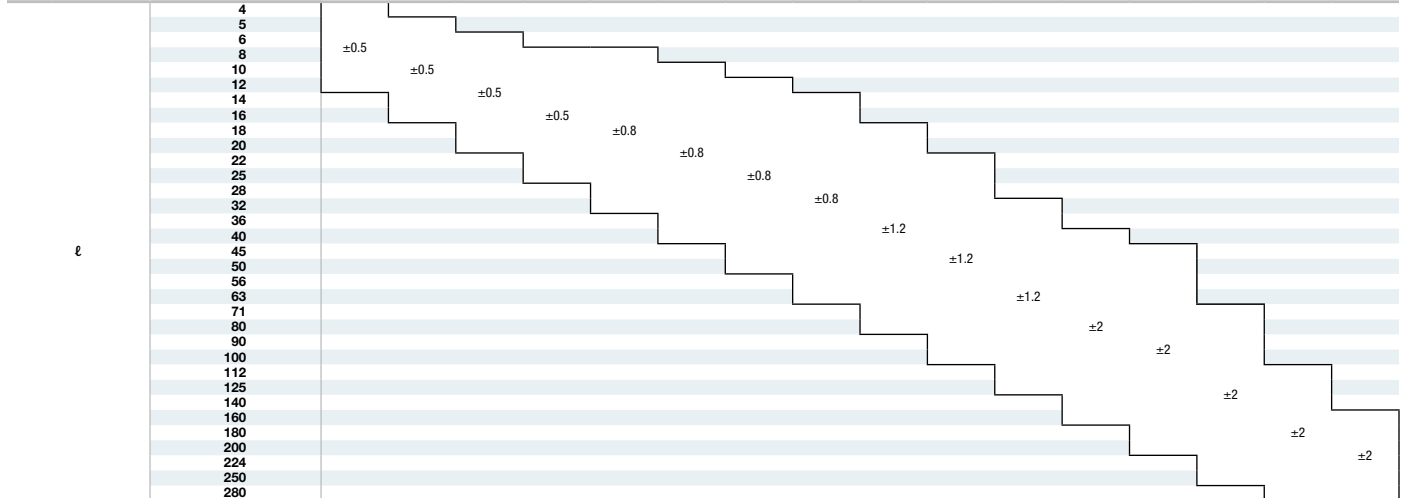

- Reference
1. The nominal diameter is dependent on the diameter of the pin hole.
  2. d is a value for a spot somewhere between the end and the l/2 spot.
  3. The end may be pointed or flat. If a pointed end or a flat one is needed, it should be specified.
  4. The length (l) should be one enclosed by thick lines. The value in an enclosed area is a tolerance. If the required r-value is not given in the table, it should be specified by the ordering side.
  5. The head must not tilt excessively from the axial center.




# Technical Data

## Spring Pins / Retaining Rings (E Type)

Excerpts from JIS B 2808 (1995)  
Excerpts from JIS B 2805 (1978)

### Shape and Dimensions of Spring Pins

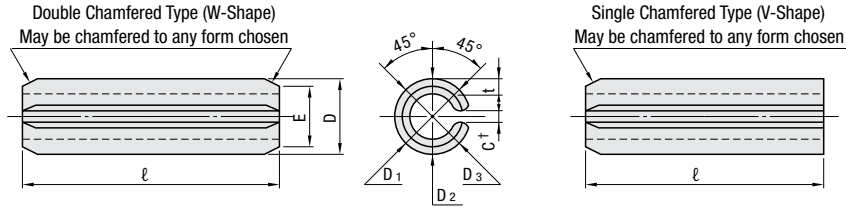


\*The size of Gap C should be able to avoid the contact between the spring pin and the hole in which the pin is to be inserted.

Nominal Diameter		1	1.2	1.4	1.5	1.6	2	2.5	3	4	5	6	8	10	13		
Spring Pins	D(t)	Max.	1.2	1.4	1.6	1.7	1.8	2.25	2.75	3.25	4.4	5.4	6.4	8.6	10.6	13.7	
		Min.	1.1	1.3	1.5	1.6	1.7	2.15	2.65	3.15	4.2	5.2	6.2	8.3	10.3	13.4	
	t (Reference)	For General Use	0.2	0.25	0.28	0.3	0.3	0.4	0.5	0.6	0.8	1	1.2	1.6	2	2.5	
		Light Load	0.1	0.12	0.15	0.15	0.15	0.2	0.25	0.3	0.4	0.5	0.6	—	—	—	
E		(Max.)	0.9	1.1	1.3	1.4	1.5	1.9	2.4	2.9	3.9	4.8	5.8	7.8	9.8	12.7	
	Double Shearing Load kN(kgf)	For General Use	0.69	1.02	1.35	1.55	1.68	2.76	4.31	6.20	10.80	17.25	24.83	44.13	68.94	112.78	
	Minimum Value	Light Load	{70}	{104}	{138}	{158}	{171}	{281}	{440}	{633}	{1130}	{1760}	{2532}	{4500}	{7030}	{11500}	
Applicable Holes	Diameter	0.38	0.56	0.80	0.87	0.93	1.55	2.42	3.49	6.21	9.70	13.96	—	—	—	—	
	Dimensional Tolerance	{39}	{57}	{82}	{89}	{95}	{158}	{247}	{356}	{633}	{989}	{1424}	—	—	—	—	
			+0.08						+0.09			+0.12			+0.15		
			0						0			0			0		
ℓ	Dimensional Tolerance	Nominal Diameter															
		1	1.2	1.4	1.5	1.6	2	2.5	3	4	5	6	8	10	13		
4	+0.5 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
5		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
6		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
8		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
10		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
12	+1.0 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
14		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
16		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
18		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
20		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
22		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
25		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
28		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
32		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
36		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
40	+1.5 0	0	0	0	0	0	0	0	0	0	0	0	0	0	0		
45		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
50		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
56		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
63		0	0	0	0	0	0	0	0	0	0	0	0	0	0		
70	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
80	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
90	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
100	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
110	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
125	0	0	0	0	0	0	0	0	0	0	0	0	0	0			
140	0	0	0	0	0	0	0	0	0	0	0	0	0	0			

Note(1): Maximum value for D is the maximum value on the pin's circumference, and the minimum value for D is the average of D1, D2 and D3.

Reference: t is in accordance with JSMA (Japan Spring Manufacturers Association Standard) No.6.

### Shape and Dimensions of Retaining Ring-E Type

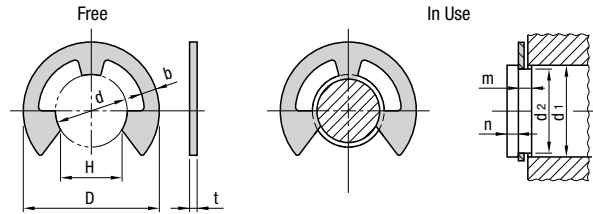

Reference: Typical shape is shown.

Nominal	d(t)		D		H		t		b	Classification of d <sub>i</sub>		Applicable Shaft (Reference)		m	n
	Reference Dimension	Tolerance	Reference Dimension	Tolerance	Reference Dimension	Tolerance	Reference Dimension	Tolerance		More than	or Less	Reference Dimension	Tolerance		
0.8	0.8	0 -0.08	2		0.7		0.2	±0.02	0.3	1	1.4	0.8	+0.05 0	0.3	0.4
1.2	1.2		3	±0.1	1		0.3	±0.025	0.4	1.4	2	1.2		0.4	0.6
1.5	1.5		4		1.3	0 -0.25	0.4		0.6	2	2.5	1.5		0.8	
2	2	0 -0.09	5		1.7		0.4		0.7	2.5	3.2	2	+0.06 0	0.5	1
2.5	2.5		6		2.1		0.4		0.8	3.2	4	2.5			
3	3		7		2.6		0.6		0.9	4	5	3			
4	4		9		3.5	0	0.6		1.1	5	7	4		0.7	
5	5	0 -0.12	11	±0.2	4.3	0 -0.3	0.6		1.2	6	8	5	+0.075 0		1.2
6	6		12		5.2		0.8	±0.04	1.4	7	9	6			
7	7		14		6.1		0.8		1.6	8	11	7			1.5
8	8	0	16		6.9	0	0.8		1.8	9	12	8	+0.09 0		1.8
9	9	-0.15	18		7.8	0 -0.35	0.8		2.0	10	14	9		0.9	
10	10		20		8.7		1.0		2.2	11	15	10			2
12	12	0	23		10.4		1.0	±0.05	2.4	13	18	12		1.15	
15	15	-0.18	29	±0.3	13	0	1.6 <sup>②</sup>		2.8	16	24	15	+0.11 0		2.5
19	19	0	37		16.5	-0.45	1.6 <sup>②</sup>	±0.06	4.0	20	31	19	+0.13 0	1.75 <sup>②</sup>	3
24	24	-0.21	44		20.8	-0.5	2.0	±0.07	5.0	25	38	24		+0.14 0	3.5
														2.2	4

Note(1): d should be measured with a limit plug gauge.

Note(2): thickness(t)=1.6mm, may be kept at 1.5mm for the time being. m should be 1.65mm.

Reference: The recommended dimensions of the applicable shaft are given here for reference.




# Technical Data


## Retaining Rings (C Type)

Excerpts from JIS B 2804(2001)

### 1. Retaining Rings-C Type-External



The hole with diameter  $d_0$  should be positioned to protrude out of the groove when the retaining ring is inserted in the shaft.



$d_5$  is the max. outer diameter when the retaining ring is fitted onto the shaft.

### Retaining Rings-C Type-External

Unit: mm

Nominal <sup>(1)</sup>	Retaining Rings							Applicable Shaft (Reference)									
	d3		t		b	a	d <sub>0</sub>	d <sub>5</sub>	d <sub>1</sub>	d <sub>2</sub>		m		n			
	Reference Dimension	Tolerance	Reference Dimension	Tolerance	(Approx.)	(Approx.)	(Min.)			Reference Dimension	Tolerance	Reference Dimension	Tolerance	(Min.)			
10	9.3	±0.15	1	±0.05	1.6	3	1.2	17	10	09.6	0	1.15					
(11)	10.2				1.8	3.1		18	11	10.5							
12	11.1	1.8			3.2	19		12	11.5								
(13)	12.0	±0.18			1.5	1.8	3.3	1.5	20	13	12.4				0		
14	12.9					2	3.4		22	14	13.4						
15	13.8	2.1			3.5	23	15	14.3	-0.11								
16	14.7	2.2			3.6	24	16	15.2									
17	15.7	2.2			3.7	25	17	16.2	0								
18	16.5	2.6			3.8	26	18	17									
(19)	17.5	2.7			3.8	27	19	18									
20	18.5	2.7	3.9	28	20	19	-0.21										
(21)	19.5	±0.2	1.2	2.7	4	30		21		20							
22	20.5			2.7	4.1	31	22	21									
(24)	22.2	±0.25	1.6 <sup>(2)</sup>	±0.06	3.1	4.2	2	33		24	22.9	0	1.35				
25	23.2				3.1	4.3		34		25	23.9						
(26)	24.2				3.1	4.4	35	26		24.9							
28	25.9				3.1	4.6	38	28		26.6							
(29)	26.9				3.5	4.7	39	29	27.6								
30	27.9				3.5	4.8	40	30	28.6								
32	29.6				3.5	5	43	32	30.3								
(34)	31.5				±0.25	1.8	±0.07	4	5.3	2.5	45			34	32.3	0	1.75
35	32.2							4	5.4		46			35	33		
(36)	33.2				±0.4	1.8	±0.07	4	5.4	47	36			34	-0.25	1.95	
(38)	35.2	4.5	5.6	50				38	36								
40	37.0	4.5	5.8	53				40	38								
(42)	38.5	4.5	6.2	55				42	39.5								
45	41.5	4.8	6.3	58				45	42.5								
(48)	44.5	4.8	6.5	62				48	45.5								
50	45.8	5	6.7	64				50	47								
(52)	47.8	5	6.8	66				52	49								
55	50.8	5	7	70				55	52								
(56)	51.8	±0.45	2	±0.08				5	7	71	56	53	0	2.2			
(58)	53.8				5.5	7.1	73	58	55								
60	55.8				5.5	7.2	75	60	57								
(62)	57.8				5.5	7.2	77	62	59								
(63)	58.8				5.5	7.3	78	63	60								
65	60.8				6.4	7.4	81	65	62								
(68)	63.5				6.4	7.8	84	68	65								
70	65.5				6.4	7.8	86	70	67								
(72)	67.5				7	7.9	88	72	69								
75	70.5				7	7.9	92	75	72								
(78)	73.5	7.4	8.1	95	78	75	0	2.7									
80	74.5	7.4	8.2	97	80	76.5											

Note<sup>(1)</sup>: Priority should be given to values not in ( ). A value in ( ) may be used if necessary.

Note<sup>(2)</sup>: Thickness(t)=1.6mm, may be kept at 1.5mm for the time being. m should be 1.65mm.

Reference: 1. The minimum width of the ring of the retaining ring should be less than the plate thickness t.


2. The recommended dimensions of the applicable shaft are given here for reference.

3.  $d_0$  (mm) should preferably be equal to  $d_4=d_3+(1.4-1.5)b$ .


Reference: The thickness t, conforms to the Japan Spring Manufacturers Association Standard, JSMA No. 6-1976 (steel belt for a spring).



2. Retaining Rings-C Type-Internal



The hole with diameter  $d_0$  should be positioned to protrude out of the groove when the retaining ring is inserted in the hole.



$d_5$  is the minimum diameter of the internal circumference when the retaining ring is fitted.

Unit: mm

Retaining Rings-C Type-Internal

Nominal <sup>(1)</sup>	Retaining Rings						Applicable Shaft (Reference)							
	$d_3$		t		b	a	$d_0$	$d_5$	$d_1$	$d_2$		m		n
	Reference Dimension	Tolerance	Reference Dimension	Tolerance	(Approx.)	(Approx.)	(Min.)			Reference Dimension	Tolerance	Reference Dimension	Tolerance	(Min.)
10	10.7	±0.18	1	±0.05	1.8	3.1	1.2	3	10	10.4	+0.11 0	1.15		
11	11.8				1.8	3.2		4	11	11.4				
12	13				1.8	3.3		5	12	12.5				
(13)	14.1				1.8	3.5	1.5	6	13	13.6				
14	15.1				2	3.6		7	14	14.6				
15	16.2				2	3.6	1.7	8	15	15.7				
16	17.3				2	3.7		8	16	16.8				
(17)	18.3				2	3.8		9	17	17.8				
18	19.5				2.5	4	2	10	18	19				
19	20.5				2.5	4		11	19	20				
20	21.5	2.5	4	12	20	21								
(21)	22.5	2.5	4.1	1.2	12	21		22						
22	23.5	2.5	4.1		13	22		23						
(24)	25.9	2.5	4.3	±0.06	15	24		25.2						
25	26.9	3	4.4		16	25		26.2						
(26)	27.9	3	4.6	1.6 <sup>(2)</sup>	16	26		27.2						
28	30.1	3	4.6		18	28		29.4						
30	32.1	3	4.7		20	30		31.4						
32	34.4	3.5	5.2		±0.25	21	32	33.7						
(34)	36.5	3.5	5.2			23	34	35.7						
35	37.8	3.5	5.2			24	35	37						
(36)	38.8	3.5	5.2			±0.21 0	25	36	38					
37	39.8	3.5	5.2				26	37	39					
(38)	40.8	4	5.3			±0.4	27	38	40					
40	43.5	4	5.7				28	40	42.5					
42	45.5	4	5.8	30			42	44.5						
45	48.5	4.5	5.9	1.8			33	45	47.5					
47	50.5	4.5	6.1				34	47	49.5					
(48)	51.5	4.5	6.2	±0.07	35		48	50.5						
50	54.2	4.5	6.5		37		50	53						
52	56.2	5.1	6.5		2		39	52	55					
55	59.2	5.1	6.5				41	55	58					
(56)	60.2	5.1	6.6				±0.25 0	42	56	59				
(58)	62.2	5.1	6.8			44		58	61					
60	64.2	5.5	6.8			±0.45	46	60	63					
62	66.2	5.5	6.9				48	62	65					
(63)	67.2	5.5	6.9				+0.3 0	49	63	66				
(65)	69.2	5.5	7					50	65	68				
68	72.5	6	7.4	2.5			53	68	71					
(70)	74.5	6	7.4				55	70	73					
72	76.5	6.6	7.4		57		72	75						
75	79.5	6.6	7.8		60		75	78						
(78)	82.5	6.6	8		+0.35 0		62	78	81					
80	85.5	7	8				64	80	83.5					

Note<sup>(1)</sup>: Priority should be given to values not in ( ). A value in ( ) may be used if necessary.

Note<sup>(2)</sup>: Thickness(t)=1.6mm, may be kept at 1.5mm for the time being. m should be 1.65mm.

Reference: 1. The minimum width of the ring of the retaining ring should be less than the plate thickness t.

2. The recommended dimensions of the applicable shaft are given here for reference.

3.  $d_1$ (mm) should preferably be equal to  $d_4 - d_3 - (1.4 - 1.5)b$ .

Reference: The thickness t, conforms to the Japan Spring Manufacturers Association Standard, JSMA No. 6-1976 (steel belt for a spring).




# Technical Data

## Machine Keys and Key Grooves

Excerpts from JIS B 1301 (1996)

### 1. Parallel Keys and Key Grooves

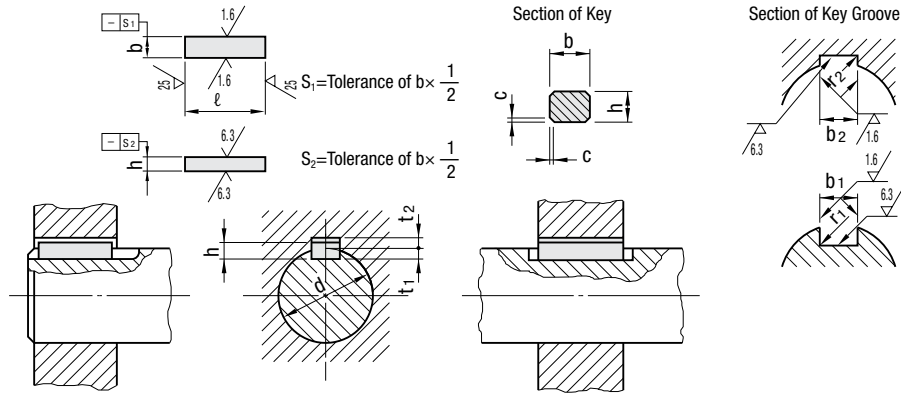

Unit: mm


Key Nominal Dimension b×h	Reference Dimension of b <sub>1</sub> , b <sub>2</sub>	Dimension of Key Groove					r <sub>1</sub> and r <sub>2</sub>	Reference Dimension of t <sub>1</sub>	Reference Dimension of t <sub>2</sub>	Reference Dimension of t <sub>2</sub> , t <sub>1</sub>	Reference Applicable Shaft Dia. <sup>(1)</sup> d
		(Sliding Type)		Standard		Precision Class					
		b <sub>1</sub> Tolerance (H9)	b <sub>2</sub> Tolerance (D10)	b <sub>1</sub> Tolerance (N9)	b <sub>2</sub> Tolerance (Js9)	b <sub>1</sub> and b <sub>2</sub> Tolerance (P9)					
2×2	2	+0.025	+0.060	-0.004		-0.006	0.08~0.16	1.2	1.0	+0.1 0	6~800
3×3	3	0	+0.020	-0.029	±0.0125	-0.031		1.8	1.4		8~100
4×4	4	+0.030 0	+0.078 +0.030	0 -0.030	±0.0150	-0.012 -0.042	0.16~0.25	2.5	1.8	+0.1 0	10~120
5×5	5							3.0	2.3		12~170
6×6	6	+0.036 0	+0.098 +0.040	0 -0.036	±0.0180	-0.015 -0.051	0.16~0.25	3.5	2.8	+0.1 0	17~220
(7×7)	7							4.0	3.0		20~250
8×7	8	+0.043 0	+0.120 +0.050	0 -0.043	±0.0215	-0.018 -0.061	0.25~0.40	4.0	3.3	+0.1 0	22~300
10×8	10							5.0	3.3		30~380
12×8	12	+0.052 0	+0.149 +0.065	0 -0.052	±0.0260	-0.022 -0.074	0.40~0.60	5.0	3.3	+0.2 0	38~440
14×9	14							5.5	3.8		44~500
(15×10)	15	+0.062 0	+0.180 +0.080	0 -0.062	±0.0310	-0.026 -0.088	0.70~1.00	5.0	5.0	+0.2 0	50~550
16×10	16							6.0	4.3		50~580
18×11	18	+0.074 0	+0.220 +0.100	0 -0.074	±0.0370	-0.032 -0.106	0.40~0.60	7.0	4.4	+0.2 0	58~650
20×12	20							7.5	4.9		65~750
22×14	22	+0.087 0	+0.260 +0.120	0 -0.087	±0.0435	-0.037 -0.124	0.40~0.60	9.0	5.4	+0.3 0	75~850
(24×16)	24							8.0	8.0		80~900
25×14	25	+0.074 0	+0.220 +0.100	0 -0.074	±0.0370	-0.032 -0.106	0.70~1.00	9.0	5.4	+0.3 0	85~950
28×16	28							10.0	6.4		95~110
32×18	32	+0.087 0	+0.260 +0.120	0 -0.087	±0.0435	-0.037 -0.124	1.20~1.60	11.0	7.4	+0.3 0	110~130
(35×22)	35							11.0	11.0		125~140
36×20	36	+0.087 0	+0.260 +0.120	0 -0.087	±0.0435	-0.037 -0.124	1.20~1.60	12.0	8.4	+0.3 0	130~150
(38×24)	38							12.0	12.0		140~160
40×22	40	+0.087 0	+0.260 +0.120	0 -0.087	±0.0435	-0.037 -0.124	2.00~2.50	13.0	9.4	+0.3 0	150~170
(42×26)	42							13.0	13.0		160~180
45×25	45	+0.087 0	+0.260 +0.120	0 -0.087	±0.0435	-0.037 -0.124	2.00~2.50	15.0	10.4	+0.3 0	170~200
50×28	50							17.0	11.4		200~230
56×32	56	+0.087 0	+0.260 +0.120	0 -0.087	±0.0435	-0.037 -0.124	2.00~2.50	20.0	12.4	+0.3 0	230~260
63×32	63							20.0	12.4		260~290
70×36	70	+0.087 0	+0.260 +0.120	0 -0.087	±0.0435	-0.037 -0.124	2.00~2.50	22.0	14.4	+0.3 0	290~330
80×40	80							25.0	15.4		330~380
90×45	90	+0.087 0	+0.260 +0.120	0 -0.087	±0.0435	-0.037 -0.124	2.00~2.50	28.0	17.4	+0.3 0	380~440
100×50	100							31.0	19.5		440~500

Note<sup>(1)</sup> The applicable shaft diameter is calculated from the torque corresponding to the strength of the key, for presentation as referential data for general-purpose use. When the key is of an appropriate size relative to the torque to be transmitted, a shaft thicker than the applicable shaft diameter may be used. In some cases, t<sub>1</sub> and t<sub>2</sub> should be adjusted so that a side of the key will come into uniform contact with the shaft and the hub. A shaft narrower than the applicable shaft diameter should not be used.

Reference The nominal sizes given in ( ) do not conform to the relevant international standard and must not be used in new design.



## 2. Slope Key, Gib Head Key and Key Groove

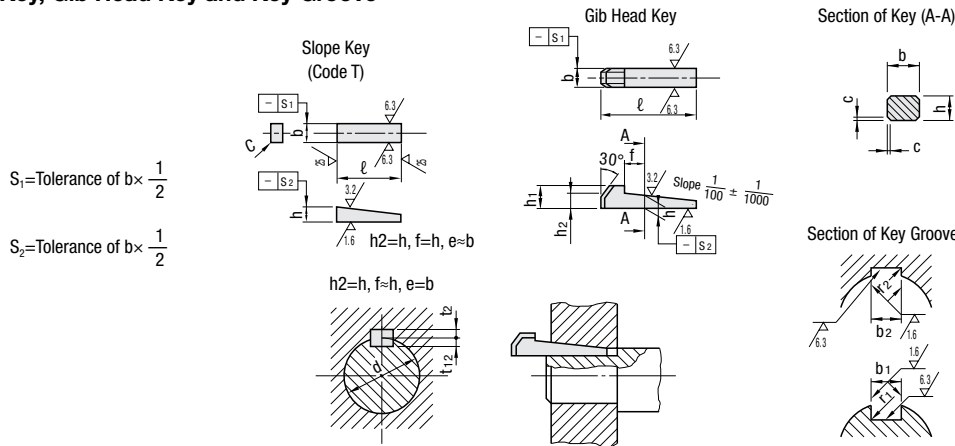

Unit: mm

Key Nominal Dimension b×h	Dimension of Key Groove						Dimension of Key Groove						Reference Shaft Dia. <sup>(2)</sup> d		
	b		h		h1	c	ℓ <sup>(1)</sup>	b <sub>1</sub> and b <sub>2</sub>		r <sub>1</sub> and r <sub>2</sub>	Reference Dimension of t <sub>1</sub>	Reference Dimension of t <sub>2</sub>		Reference Dimension of t <sub>2</sub> , t <sub>1</sub>	
	Reference Dimension	Tolerance (h9)	Reference Dimension	Tolerance				Reference Dimension	Tolerance (D10)						Reference Dimension of t <sub>1</sub>
2×2	2	0	2	0	—	—	6~30	2	+0.060	0.08 ~0.16	1.2	0.5	+0.05	6~80	
3×3	3	-0.025	3	-0.025	—	0.16 ~0.25	6~36	3	+0.020		1.8	0.9	0	8~100	
4×4	4	-0.030	4	0	7	—	8~45	4	+0.078		2.5	1.2	+0.1 0	10~120	
5×5	5		5	-0.030			h9	8	10~56	5	+0.030	3.0		1.7	12~170
6×6	6		6	0			10	14~70	6	+0.098	3.5	2.2		17~220	
(7×7)	7	-0.036	7.2	-0.036	10	0.25 ~0.40	16~80	7	+0.040	4.0	3.0	20~250			
8×7	8		7	0	11	18~90	8	+0.120 +0.050	4.0	2.4	22~300				
10×8	10		8	-0.090	h11	12	22~110		10	5.0	2.4	+0.2 0	30~380		
12×8	12	8	0	12	28~140	12	0.40 ~0.60		5.0	2.4	38~440				
14×9	14	9	-0.090	14	36~160	14		5.5	2.9	44~500					
(15×10)	15	-0.043	10.2	0	15	0.40 ~0.60		40~180	15	+0.149	5.0	5.0	+0.1 0	50~550	
16×10	16		10	-0.070	16	45~180	16	+0.065	6.0	3.4	50~580				
18×11	18		11	0	h11	18	50~200	18	0.40 ~0.60	7.0	3.4	+0.2 0	58~650		
20×12	20	12	-0.110	20	56~220	20	+0.180 +0.080	7.5		3.9	65~750				
22×14	22	14	0	22	63~250	22		9.0		4.4	75~850				
(24×16)	24	-0.052	16.2	0	24	0.60 ~0.80		70~280	24	0.70 ~1.00	8.0	8.0	+0.1 0	80~900	
25×14	25		14	-0.070	h10	22	70~280	25	9.0		4.4	85~950			
28×16	28		16	0	h11	25	80~320	28	10.0		5.4	+0.2 0	95~110		
32×18	32	-0.062	18	-0.110	28	1.00 ~1.20	90~360	32	+0.220 +0.100	11.0	6.4	+0.3 0	110~130		
(35×22)	35		22.3	0	h10		32	100~400		35	11.0	11.0	+0.15 0	125~140	
36×20	36		20	-0.084	h11		32	—		36	12.0	7.1	+0.3 0	130~150	
(38×24)	38	-0.062	24.3	0	36	1.00 ~1.20	—	38	+0.180 +0.080	12.0	12.0	+0.15 0	140~160		
40×22	40		22	-0.084	h10		36	—		40	13.0	8.1	+0.3 0	150~170	
(42×26)	42		26.3	0	h10		40	—		42	13.0	13.0	+0.15 0	160~180	
45×25	45	-0.074	25	0	40	1.60 ~2.00	—	45	+0.220 +0.100	15.0	9.1	+0.3 0	170~200		
50×28	50		28	-0.130	45		—	50		17.0	10.1		200~230		
56×32	56		32	0	h11		50	—		56	20.0		11.1	230~260	
63×32	63	-0.087	32	0	50	1.60 ~2.00	—	63	+0.220 +0.100	20.0	11.1	+0.3 0	260~290		
70×36	70		36	-0.160	56	—	70	22.0		13.1	290~330				
80×40	80		40	0	63	—	80	25.0		14.1	330~380				
90×45	90	-0.087	45	0	70	2.50 ~3.00	—	90	+0.260 +0.120	28.0	16.1	380~440			
100×50	100		50	-0.160	80	—	100	31.0		18.1	440~500				

Note<sup>1)</sup>: From the values for ℓ given below, which are in the appropriate range in the table, one should be selected.

The tolerance for ℓ should be h12 under JIS B0401 (dimension tolerance and fitting), in principle.

6,8,10,12,14,16,18,20,22,25,28,32,36,40,45,50,56,63,70,80,90,100,110,125,140,160,180,200,220,250,280,320,360,400

Note<sup>2)</sup>: The appropriate shaft diameter should be matched with the torque corresponding to the strength of the key.

Reference: The nominal sizes given in ( ) should not be used unless they are absolutely necessary.

The groove for the boss should be slanted to 1/100, in principle.



# Materials

## Varieties and Applications 1

### 1. General Steel Materials

Type	Material Code	Applications	Comment	JIS	Flat Bar	Square Bar	Hexagonal Bar	Round Bar	Steel Plate	Section Steel
Rolled Steel for General Structure	1018 Carbon Steel	General Machine Parts	Fine Workability and Weldability	JIS G 3101	0	0		0	0	0
Polished Steel Bar (Cold-Drawn)	JIS-SS400D	General Machine Parts	Excellent Precision and Surface Roughness. Ready for use directly after slight cutting.	-	0	0	0	0		
Carbon Steel for Machine Structural Use	1045 Carbon Steel	General Machine Parts	Fit for Hardening Tensile Strength 58kgf/mm <sup>2</sup>	JIS G 4051	0	0	0	0	0	
	1049 Carbon Steel		Fit for Hardening Tensile Strength 66kgf/mm <sup>2</sup>							
Carbon Tool Steel	W1-9 Tool Steel	Shafts, Pins, etc.	For Drill Rod (Round Bar) SK4 surface-finished after cold drawing. Class 7(-DG7)=h7 Class 8(-DG8)=h8 Class 9(-DG9)=h9.	JIS G 4401	0			0		
	W1-8 Tool Steel									
Alloy Tool Steel	JIS-SKS93	Hardening Parts	Deformation caused by Hardening is much less than that of SK material.	JIS G 4404	0	0		0		
	01 Tool Steel									
Chrome Molybdenum Steel	4137 Alloy Steel	General Machine Parts requiring strength Screws, etc.	Tensile Strength 70kgf/mm <sup>2</sup> , Tensile Strength after Hardening & tempering: 95 kgf/mm <sup>2</sup> or more. Hardness: HB270 or more. Hardening: HRC50 or more.	JIS G 4105	0	0	0	0	0	
	SCM415 Alloy Steel									
	JIS-SCM420									
Sulfuric and Sulfur Compound Free Cutting Steel	1212 Carbon Steel	General Machine Parts (Free-Cutting steel)	Made of carbon steel plus sulfur to enhance machinability.	JIS G 4804		0	0	0		
	12L13 Carbon Steel		Free-Cutting Steel containing sulfur and lead.							
	12L14 Carbon Steel									
High Carbon Chrome Bearing Steel	52100 Bearing Steel	Roller Bearings, etc.	Bearing Steel	JIS G 4805				0		
Cold-Rolled Steel Plate	Low Carbon Steel	Covers, Cases, etc.	Rolled at an almost ambient temperature. High dimensional precision and fair texture. Fine machinability. Easy to bend, wring and cut. Fine Weldability.	JIS G 3141					0	
Hot-Rolled Steel Plate	Low Carbon Steel	General Machine Structural Parts	Plates for general use are 6 mm or less in thickness.	JIS G 3131					0	

### 2. Stainless Steel Materials

Type	Material Code	Applications	Comment	Magnetism	JIS	Flat Bar	Square Bar	Hexagonal Bar	Round Bar	Steel Plate	Section Steel
Austenite	303 Stainless Steel	Machine parts requiring antirusting	18-8 Free-Cutting Stainless Steel, Non-Magnetic. More Machinable than SUS304	None*	JIS G 4303~	Good			Good		
Austenite	304 Stainless Steel	Machine parts requiring antirusting	Most Versatile Antirusting and Heat-Resisting Steel for General Use	None*		Good	Good	Good	Good	Good	Good
Austenite	316 Stainless Steel	Machine parts requiring antirusting	More resisting to seawater and other media than SUS304.	None*		Good			Good	Good	
Martensite	440C Stainless Steel	Machine parts requiring antirusting (Less corrosion resistant than austenite.)	Fit for Hardening.	Available					Good		
Martensite	410 Stainless Steel	Machine parts requiring antirusting (Less corrosion resistant than austenite.)	Fit for Hardening. Fine Machinability.	Available					Good		

\*Martensite exhibits magnetic properties. Machining of Austenite may cause magnetic properties.

#### <Reference: Corrosion Resistance of Stainless Steel>


Testing Method

Conforms to the JIS H 8502 Cycle Test Method as a complex corrosion test

Test Conditions

- (1) Salt water spray test (5%NaCl. 35°C) 2 hr
  - (2) Drying (60°C) 4 hr
  - (3) Wetting (95%RH. 35°C) 2 hr
- One cycle takes 8 hr

Appearance of test piece 48 hr, 168 hr before test.

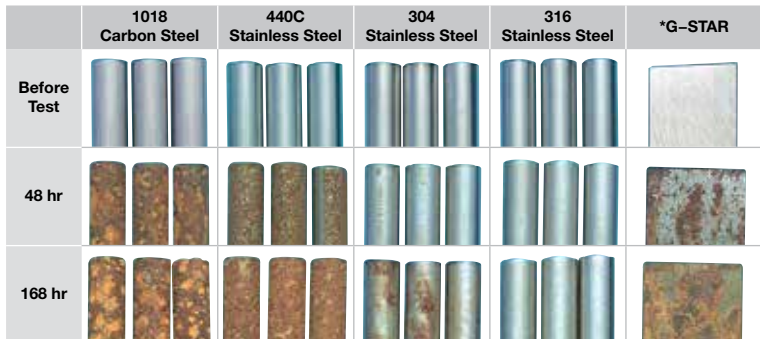

\*G-STAR is martensite stainless steel (pre-hardened steel) manufactured by the Daido Special Steel Co., Ltd.



**3. Aluminum Alloy Materials**

Type	Material Code	Applications	Comment	JIS	Flat Bar	Square Bar	Hexagonal Bar	Round Bar	Section Steel
Al-Cu Alloy	A2011	General-Use Strength Materials	Free-Cutting Alloy. It excels in machinability but has worse corrosion resistance.	JIS H 4000			Good		
Al-Cu Alloy	A2017	General-Use Strength Materials	High Strength and Machinability Duralumin		Good		Good	Good	
Al-Mg Alloy	A5052	General Machine Parts Covers, cases, etc.	Most typical aluminum alloy with medium strength. With high fatigue strength in comparison with its strength and high corrosion resistance to seawater.		Good			Good	
Al-Mg Alloy	A5056	General Machine Parts	It has fine machined surface and high corrosion resistance to seawater. It has fine machined surface and high corrosion resistance to seawater.				Good		
Al-Mg-Si Alloy	A6061	General Machine Parts	Heat-treated corrosion resisting alloy. High durability owing to T6 treatment.		Good		Good		
Al-Mg-Si Alloy	A6063	General Machine Parts and Structural Material	Weaker than 6061, but more extrudable. Applicable to complex cross-sections shapes. Good corrosion resistance and surface treatment.		Good	Good			Good
Al-Zn-Mg Alloy	A7075	Jigs and Dies	It is one of the strongest aluminum alloys but has worse corrosion resistance. Extra Super Duralumin		Good				

**JIS Acronyms for Non-Ferrous Metal**

P	Plate, Strip, Disk	TE	Seamless Extruded Tube	BR	Riveted Bar
PC	Laminate	TD	Seamless Drawn Tube	FD	Die-Forged Part
BE	Extruded Bar	TW	Welded Tube	FH	Free-Forged Part
BD	Drawn Bar	TWA	Arc-Welded Tube		
W	Drawn Wire	S	Extruded Section		

**Quality Codes for Aluminum and Aluminum Alloys**

Code	Definition	Description
F	Plain Manufactured Material	Completed as a product, without any order for thermal refining. Extruded or forged material, not thermally refined.
H112	Wrought material, for which certain mechanical properties are guaranteed without the need of hardening.	
O	Brought into the softest state by annealing.	Completely re-crystallized by annealing. A thermally treated alloy should be cooled at a temperature below the annealing temperature to prevent the effect of annealing completely.
H	H1n	Hardened by cold working.
	H2n	Hardened and then properly softened by heat.
	H3n	Stabilized after cold working.
T	T1	Cooled after high-temperature working and then allowed to age naturally.
	T3	Allowed to age naturally after solution treatment and cold working.
	T351	Allowed to age naturally after solution treatment and cold working.
	T4	Natural aging after solution treatment
	T5	Hardened through artificial aging after high-temperature processing and quenching
	T6	Hardened through artificial aging after solution treatment.
	T61	Wrought Materials: Hardened through artificial aging after solution treatment by quenching with lukewarm water. Casting: Tempered after hardening
	T7	Stabilized after solution treatment
	T73	Overaging after solution treatment.
T7352	Overaging after removal of residual stress after solution treatment.	
T8	Hardened through artificial aging after cold working subsequent to solution treatment.	
T9	Cold working after hardening through artificial aging subsequent to solution treatment.	



## Materials

### Hardening and Hardness Test Methods

#### ■ Heat Treatment for Steel Materials

Name	Vickers Hardness (HV)	Hardening Depth (mm)	Strain	Applicable Materials	Typical Material	Reference
Through Hardening	750 or Less	Full Depth	Varies according to materials	High Carbon Steel C>0.45%	01 Tool Steel JIS-SKS21 52100 Bearing Steel M2 Tool Steel JIS-SKS93 W1-9 Tool Steel 1045 Carbon Steel	<ul style="list-style-type: none"> <li>– Operation of heating copper to an appropriate temperature over transformation point and quickly cooling it in an appropriate medium in order to increase hardness or improve strength.</li> <li>– Not applicable to long or precision parts, such as spindles, etc.</li> </ul>
Carburization	500 or Less	Standard 0.5 Up to 2	Moderate	Low Carbon Steel C<0.3%	SCM415 Alloy Steel JIS-SNCM220	<ul style="list-style-type: none"> <li>– Applicable to partial hardening</li> <li>– Hardening depth should be specified on drawings</li> <li>– Applicable to precision parts</li> </ul>
Induction Hardening	750 or Less	1~2	High	Medium Carbon Steel C 0.3~0.5%	1045 Carbon Steel	<ul style="list-style-type: none"> <li>– A surface hardening method that uses high frequency induction current to quickly heat and cool the steel surface</li> <li>– Applicable to partial hardening</li> <li>– Expensive in small-volume lots</li> <li>– High fatigue resistance</li> </ul>
Nitriding	900~1000	0.1~0.2	Low	Nitriding Steel	JIS-SCM645	<ul style="list-style-type: none"> <li>– A surface hardening method that forms hardening layer of hard nitride compounds on the steel surface</li> <li>– Obtains highest degree of hardness among all hardening techniques</li> <li>– Fit for mass production</li> <li>– Applicable to spindles for sliding bearing</li> </ul>
TUFFTRIDE is the trademark of Durferrit GmbH, Germany (salt bath process)	Carbon Steel 500 Stainless Steel 1000	0.01~0.02	Low	Steel Material	1045 Carbon Steel SCM415 Alloy Steel W1-10 Tool Steel Stainless Steel	<ul style="list-style-type: none"> <li>– Tufftride is one of the nitriding methods called soft-nitriding (salt bath process)</li> <li>– High fatigue resistance and abrasion resistance</li> <li>– Same corrosion resistance as zinc plating</li> <li>– Not applicable to precision parts because of incapability of polishing after heat treatment</li> <li>– Applicable to oil free bearings.</li> </ul>
Bluing	—	—	—	Wire Rod	JIS-SWP-B	<ul style="list-style-type: none"> <li>– Low temperature annealing</li> <li>– Removes internal stress during forming to enhance elasticity</li> </ul>

#### ■ Hardness Test Methods and Applicable Parts

Testing Method	Principle	Applicable Heat-Treated Parts	Features	Reference
Brinell Hardness	– A (steel or super hard alloy) ball indenter is used to indent the test surface. Hardness is given as a quotient divided by the surface area of the dent, computed from the diameter.	<ul style="list-style-type: none"> <li>– Annealing</li> <li>– Normalized parts</li> <li>– Anchored materials</li> </ul>	<ul style="list-style-type: none"> <li>– Applicable to uneven materials and forged products because indent is large</li> <li>– Not applicable to small or thin specimens</li> </ul>	JIS Z2243
Rockwell Hardness	– This standard or test load is applied via a diamond or ball indenter. Hardness is read on a tester.	<ul style="list-style-type: none"> <li>– Hardening tempered parts</li> <li>– Carburized surfaces</li> <li>– Nitrided parts</li> <li>– Thin sheets such as copper, brass, bronze, etc.</li> </ul>	<ul style="list-style-type: none"> <li>– Hardness value obtained quickly</li> <li>– Applicable to intermediate testing of actual products</li> <li>– Caution is required as there are 30 types</li> </ul>	JIS Z2245
Shore Hardness	– The specimen is set on a table. A hammer is dropped from a uniform height. Hardness is based on how height the hammer bounces.	<ul style="list-style-type: none"> <li>– Hardening tempered parts</li> <li>– Nitrided parts</li> <li>– Large carburized parts, etc.</li> </ul>	<ul style="list-style-type: none"> <li>– Extremely easy to operate and data can be obtained quickly</li> <li>– Applicable to large parts</li> <li>– Indent is kept shallow, therefore is applicable to actual products</li> <li>– Portable, as being compact and light weight</li> </ul>	JIS Z2246
Vickers Hardness	– Uses a diamond 136°square pyramid indenter. Hardness value is obtained from the surface area of the dent, computed from the experimental load and the length of the diagonal lines of the dent. (Automatically calculated)	<ul style="list-style-type: none"> <li>– This hardening layers by induction hardening, carburizing, nitriding, electrolytic plating, ceramic coating, etc.</li> <li>– Hardening layer depth in carburized and nitrided parts</li> </ul>	<ul style="list-style-type: none"> <li>– Applicable to small and thin specimens</li> <li>– Applicable to all materials because of diamond indenter</li> </ul>	JIS Z2244



# Materials

## Standard Material Sizes 1

### ■ General Steel Materials

Type	Material Code	Shapes	Unit	Standard Dimensions
Rolled Steel for General Structure	1018 Carbon Steel	Flat Bar	t	6, 9, 12, 13, 14, 16, 19, 22, 25, 28, 30, 32, 35, 38, 40, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100, 105
		Square Bar	—	9, 13, 16, 19, 22, 25, 32, 38, 44, 50, 65, 75, 90, 100
Polished Steel Bar (Cold-Drawn)	JIS SS400D	Flat and Square Steel Bar	t	Width W
			2	6, 8, 10, 12, 16, 20
			3	6, 8, 9, 10, 12, 13, 16, 19, 22, 25, 32, 38, 50
			4	10, 13, 16, 19, 20, 22, 25, 32
			4.5	11, 13, 16, 19, 22, 25, 32, 38, 50
			5	8, 10, 13, 16, 19, 20, 22, 25, 30, 32, 38, 50
			6	9, 10, 13, 16, 19, 20, 22, 25, 32, 38, 44, 50, 60, 65, 75, 90, 100, 125
			8	10, 12, 13, 16, 19, 22, 25, 30, 32, 38
			9	12, 13, 16, 19, 22, 25, 32, 38, 44, 50, 60, 65, 75, 90, 100, 125
			10	13, 15, 16, 20, 22, 25, 30, 32, 38, 40, 50, 60, 65, 100
			12	16, 19, 22, 32, 38, 44, 45, 50, 60, 65, 75, 90, 100, 125
			16	19, 22, 25, 32, 38, 44, 50, 60, 65, 75, 90, 100, 125
			19	22, 25, 32, 38, 44, 50, 60, 65, 75, 90, 100, 125
			22	25, 32, 38, 44, 50, 60, 65, 75, 90, 100, 125
			25	32, 38, 44, 50, 60, 65, 75, 90, 100, 125
			30	50, 65, 75, 100, 125
			32	50, 65, 75, 100, 125
			38	50, 65, 75, 100, 125
		Square Bar	—	2.5, 3, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 25, 28, 30, 32, 34, 35, 36, 38, 40, 42, 44, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90, 100, 110, 120, 130
		Hexagonal Bar	Opposite Side H	3, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 22, 23, 24, 26, 27, 29, 30, 32, 35, 36, 38, 41, 46, 50, 54, 55, 58, 60, 63, 65, 67, 70, 71, 75, 77, 80, 85, 90, 95, 100, 115
		Round Bar	D	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 40, 42, 43, 44, 45, 46, 48, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100, 105, 110, 115, 120, 130, 140, 150, 160, 170, 180, 190, 200
Cold-Rolled Steel Plate	Low Carbon Steel	Steel Plate	t	0.4, 0.5, 0.6, 0.7, 0.8, 1, 1.2, 1.6, 2, 2.3, 3.2
Hot-Rolled Steel Plate	Low Carbon Steel	Steel Plate	t	(1.2), 1.6, 2.3, 2.6, 3.2, 4.5
Carbon Steel for Machine Structural Use	1045 Carbon Steel (Polished)	Round Bar	D	2, 2.5, 3, 3.5, 4, 4.5, 6, 7, 8, 9, 9.5, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 35, 36, 38, 40, 42, 44, 45, 46, 48, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100, 105, 110, 115, 120, 125, 130
	1049 Carbon Steel	Flat Bar	t	6, 9.5, 12.7, 13, 16, 19, 22, 25, 27, 32, 38, 45, 50, 55, 65, 75, 85, 95, 105, 115, 125, 135, 145, 155, (165), (175), (185), (205)
		Square Bar	—	12.7, 13, 16, 19, 25, 28, 32, 38, 44, 50, 55, 65, 75, 90, 100, 110, 120, 130, 155
Carbon Tool Steel	JIS-SKS93	Flat Bar	t	2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 16, 19, 22, 25, 27, 32, 38, 43, 50, 53, 65, 75, 90, 105, 130, 155
	JIS-SKS93	Square Bar	—	10, 13, 16, 19, 22, 25, 28, 32, 38, 45, 50, 55, 65, 75, 90, 105, 130, (155), (210)
	W1-9 Tool Steel -DG8	Round Bar	D	2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 22, 23, 24, 25, 26, 28, 30, 32, 36, 38, 40, 42, 45, 48, 50, 55, 60, 65, 70, 75, 80
Alloy Tool Steel	01 Tool Steel	Flat Bar	t	2, 3, 4, 5, 6, 7, 8, 9, 10, 12, 13, 16, 19, 22, 25, 27, 32, 38, 43, 50, 53, 65, 75, 90, 105, 130, 155, (160)
		Square Bar	—	10, 13, 16, 19, 22, 25, 28, 32, 36, 38, 45, 50, 55, 65, 75, 90, 105, 130, (155), (210)
		Round Bar	D	13, 16, 19, 22, 25, 28, 32, 38, 42, 46, 50, 55, 60, 65, 70, 80, 85, 90, 100, 110, 120, 130, 150, 160, 180
Chrome Molybdenum Steel	4137 Alloy Steel	Hexagonal Bar	Opposite Side H	6, 7, 8, 9, 10, 11, 12, 13, 14, 17, 19, 21, 22, 23, 24, 26, 27, 30, 32, 35, 36, 38, 41, 46, 50, 54, 55
		Round Bar	D	4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 30, 32, 34, 35, 36, 38, 40, 42, 45, 46, 48, 50
Sulfuric and Sulfur Compound Free Cutting Steel	12L14 Carbon Steel	Round Bar	D	3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 20, 22, 23, 24, 25, 26, 28, 30, 32, 34, 35, 36, 38, 40
High Carbon Chrome Bearing Steel	52100 Bearing Steel	Round Bar	D	13, 16, 19, 22, 25, 28, (30), 32, (34), 36, 38, 42, (44), 46, (48), 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100, 110, 120, 130, 140, 150, (160), (170), (180), (190), (200), (210), (220), (230), (240), (250)



# Materials

## Standard Material Sizes 2

### ■ Stainless Steel Materials

Type	Material Code	Shapes	Unit	Standard Dimensions
Austenite	303 Stainless Steel	Round Bar	D	3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 25, 26, 28, 30
Austenite	304 Stainless Steel	Flat Bar	t	3, 4, 5, 6, 8, 9, 10, 12, 14, 15, 16, 19, 20, 22, 25, 28, 30, 35, 40, 45, 50, 55, 60, 70
		Square Bar	—	5, 6, 7, 8, 9, 10, 12, 13, 14, 15, 16, 19, 20, 22, 25, 28, 30, 32, 36, 38, 40, 45, 50, 60
		Hexagonal Bar	Opposite side H	8, 10, 14, 17, 19, 21, 22, 23, 24, 26, 29, 30, 32, 35, 36, 38, 41, 46
		Round Bar	D	3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 28, 30, 32, 34, 35, 36, 38, 40, 42, 45, 46, 48, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100, 110, 120, 130, 140, 150, 160, 170, 180, 190, 200, 210, 220, 230
		Steel Plate	t	0.3, 0.4, 0.5, 0.6, 0.8, 1, 1.2, 1.5, 2, 2.5, 3, 4, 5, 6, 7, 8, 9, 10, 12, 15, 20

### ■ Copper Alloy Materials

Type	Material Code	Shapes	Unit	Standard Dimensions
Brass Plate	C28000 Brass	Steel Plate	t	0.1, 0.15, 0.2, 0.3, 0.4, 0.5, 0.8, 1, 1.2, 1.5, 1.6, 2, 2.3, 2.5, 3, 3.5, 4, 5, 6, 7, 8, 9, 10, 12, 15, 20, 25, 30, 40, 50
Free-Cutting Brass (Extruded Bar)	C3604 BD Brass (JIS)	Square Bar	—	3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 28, 30, 32, 35, 36, 38, 40, 42, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100
		Hexagonal Bar	Opposite Side H	5, 5.5, 6, 7, 8, 9.5, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 34, 35, 36, 38, 40, 41, 42, 44, 45, 46, 50, 54, 55, 58, 60, 65, 70, 75, 80
		Round Bar	D	3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 35, 36, 38, 40, 42, 45, 46, 47, 48, 50, 51, 52, 53, 54, 55, 56, 57, 58, 60, 65, 70, 75, 80, 85, 90, 95, 100, 105, 110, 115, 120, 125, 130, 135, 140, 145, 150, 160, 170, 180, 190, 200, 210, 220, 230, 240, 250, 270, 280, 300, 320, 350

### ■ Aluminum Alloy Materials

Type	Material Code	Shapes	Unit	Standard Dimensions
Al-Cu Alloy	2017 Aluminum Alloy	Flat Bar	t	0.5, 0.6, 0.8, 1, 1.2, 1.5, 1.6, 2, 2.5, 3, 4, 5, 6, 8, 10, 12, 15, 20, 25, 30, 40, 45, 50, 60, 70, 80, 90, 100
		Round Bar	D	5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 70, 75, 80, 85, 90, 95, 100, 105, 110, 115, 120, 125, 130, 135, 140, 150, 160, 170, 180, 190, 200, 210, 220, 230, 240, 250, 260, 280, 300
Al-Mg Alloy	5052 Aluminum Alloy	Flat Bar	t	0.4, 0.5, 0.6, 0.7, 0.8, 1, 1.2, 1.5, 1.6, 2, 3, 3.2, 4, 5, 6, 7, 8, 10, 12, 15, 16, 18, 20, 22, 25, 30, 35, 40, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100, 105, 110, 120, 130, 150, 160, 170, 180, 200
Al-Mg Alloy	5056 Aluminum Alloy	Round Bar	D	5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 70, 75, 80, 85, 90, 95, 100, 105, 110, 115, 120, 125, 130, 135, 140, 150, 160, 170, 180, 190, 200, 210, 220, 230, 240, 250, 260, 270, 280, 290, 300, 310, 320, 330, 340, 350, 360, 370, 380, 390, 400, 420
Al-Mg-Si Alloy	6063 Aluminum Alloy	Square Bar	—	6, 8, 10, 12, 14, 15, 16, 18, 19, 20, 22, 25, 30, 32, 35, 40, 45, 50, 60, 70, 80, 100

### ■ Resin Type Materials

Type	Material Code	Shapes	Unit	Standard Dimensions
Laminated Sheet	Bakelite	Plate	t	(0.5), (0.6), 0.8, 1, 1.2, 1.5, 1.6, 2, 2.5, 3, 4, 5, 6, 8, 10, 12, 15, 16, 20, 25, 30, 35, 40, 50 Sizes in ( ) for cloth base only.
Polyamide Resin	Nylon 6, 66	Plate	t	5, 10, 15, 20, 25, 30, 40, 50
		Bar	D	6, 8, 10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60, 65, 70, 75, 80, 90, 100, 120, 140, 160, 180, 200
(MC Nylon)	MC Nylon	Plate	t	5, 7, 10, 12, 15, 20, 25, 30, 35, 40, 45, 50, 60, 70, 80, 90, 100, 110, 120
		Bar	D	20, 25, 30, 35, 40, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100, 110, 120, 130, 140, 150, 160, 170, 180, 190, 200, 225, 250, 275, 300, 325, 350, 375, 400, 450, 500, 600
Acetal Resin	Polyacetal	Plate	t	5, 6, 8, 10, 12, 15, 20, 25, 30, 35, 40, 50, 60, 70, 80, 90, 100
		Bar	D	4, 5, 6, 7, 8, 9, 10, 12, 12.5, 13, 15, 16, 17.5, 20, 22.5, 25, 30, 35, 40, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90, 100, 110, 120, (130), (140), 150, (160), (180), 200
General Methacrylic Resin Plate	Acrylic	Plate	t	0.8, 1, 1.5, 2, 3, 4, 5, 6, 8, 10, 15, 20, 25, 30



# Materials Data

## Comparisons of Materials Between JIS and Foreign Standards 1

### Carbon Steel for Machine Structural Use, Alloy Steel

Japan Industrial Standards		Steel Type Related to Foreign Standards					
Standard Number Name	Symbol	ISO 683/1,10,115)	AISI SAE	BS 970 Part1,3 BS EN 10083-1,2	DIN EN 10084 DIN EN 10083-1,2	NF A35-551 NF EN 10083-1,2	ГОСТ 4543
JIS G 4051 Carbon Steel for Machine Structural Use	S10C	C10	1010	040A10 045A10 045M10	C10E C10R	XC10	—
	S12C	—	1012	040A12	—	XC12	—
	S15C	C15E4 C15M2	1015	055M15	C15E C15R	—	—
	S17C	—	1017	—	—	XC18	—
	S20C	—	1020	070M20 C22 C22E C22R	C22 C22E C22R	C22 C22E C22R	—
	S22C	—	1023	—	—	—	—
	S25C	C25 C25E4 C25M2	1025	C25 C25E C25R	C25 C25E C25R	C25 C25E C25R	—
	S28C	—	1029	—	—	—	25Г
	S30C	C30 C30E4 C30M2	1030	080A30 080M30 C30 C30E C30R	C30 C30E C30R	C30 C30E C30R	30Г
	S33C	—	—	—	—	—	30Г
	S35C	C35 C35E4 C35M2	1035	C35 C35E C35R	C35 C35E C35R	C35 C35E C35R	35Г
	S38C	—	1038	—	—	—	35Г
	S40C	C40 C40E4 C40M2	1039 1040	080M40 C40 C40E C40R	C40 C40E C40R	C40 C40E C40R	40Г
S43C	—	1042 1043	080A42	—	—	40Г	
S45C	C45 C45E4 C45M2	1045 1046	C45 C45E C45R	C45 C45E C45R	C45 C45E C45R	45Г	
S48C	—	—	080A47	—	—	45Г	
S50C	C50 C50E4 C50M2	1049	080M50 C50 C50E C50R	C50 C50E C50R	C50 C50E C50R	50Г	
S53C	—	1050 1053	—	—	—	50Г	
S55C	C55 C55E4 C55M2	1055	070M55 C55 C55E C55R	C55 C55E C55R	C55 C55E C55R	—	
S58C	C60 C60E4 C60M2	1059 1060	C60 C60E C60R	C60 C60E C60R	C60 C60E C60R	60Г	
S09CK	—	—	045A10 045M10	C10E	XC10	—	
S15CK	—	—	—	C15E	XC12	—	
S20CK	—	—	—	—	XC18	—	
JIS G 4106 Manganese Steel and Chrome-Manganese Steel for Machine Structural Use	SMn420	22Mn6	1522	150M19	—	—	30Г 2 35Г 2
	SMn433	—	1534	150M36	—	—	35Г 2 40Г 2
	SMn438	36Mn6	1541	150M36	—	—	40Г 2 45Г 2
	SMn443	42Mn6	1541	—	—	—	—
SMnC420	—	—	—	—	—	—	
SMnC443	—	—	—	—	—	—	
JIS G 4202 Aluminum Chrome Molybdenum Steel	SACM645	41CrAlMo74	—	—	—	—	—
JIS G 4052 Structural Steel with Guaranteed Hardenability (H Steel)	SMn420H	22Mn6	1522H	—	—	—	—
	SMn433H	—	—	—	—	—	—
	SMn438H	36Mn6	1541H	—	—	—	—
	SMn443H	42Mn6	1541H	—	—	—	—
	SMnC420H	—	—	—	—	—	—
	SMnC443H	—	—	—	—	—	—
	SCr415H	—	—	—	17Cr3 17CrS3	—	15X
	SCr420H	20Cr4 20CrS4	5120H	—	—	—	20X
	SCr430H	34Cr4 34CrS4	5130H 5132H	34Cr4 34CrS4	34Cr4 34CrS4	34Cr4 34CrS4	30X
	SCr435H	34Cr4 34CrS4 37Cr4 37CrS4	5135H	37Cr4 37CrS4	37Cr4 37CrS4	37Cr4 37CrS4	35X
	SCr440H	37Cr4 37CrS4 41Cr4 41CrS4	5140H	41Cr4 41CrS4	41Cr4 41CrS4	41Cr4 41CrS4	40X
	SCM415H	—	—	—	—	—	—
	SCM418H	18CrMo4 18CrMoS4	—	—	18CrMo4 18CrMoS4	—	—
	SCM420H	—	—	—	—	—	—
	SCM435H	34CrMo4 34CrMoS4	4135H 4137H	34CrMo4 34CrMoS4	34CrMo4 34CrMoS4	34CrMo4 34CrMoS4	—
	SCM440H	42CrMo4 42CrMoS4	4140H 4142H	42CrMo4 42CrMoS4	42CrMo4 42CrMoS4	42CrMo4 42CrMoS4	—
	SCM445H	—	4145H 4147H	—	—	—	—
	SCM822H	—	—	—	—	—	—
	SNC415H	—	—	—	—	—	—
	SNC631H	—	—	—	—	—	—
	SNC815H	15NiCr13	—	655H13	15NiCr13	—	—
	SNCM220H	20NiCrMo2 20NiCrMoS2	8617H 8620H 8622H	805H17 805H20 805H22	—	—	20NCD2
	SNCM420H	—	4320H	—	—	—	—

Japan Industrial Standards		Steel Type Related to Foreign Standards					
Standard Number Name	Symbol	ISO 683/1,10,115)	AISI SAE	BS 970 Part1,3 BS EN 10083-1,2	DIN EN 10084 DIN EN 10083-1,2	NF A35-551 NF EN 10083-1,2	ГОСТ 4543
JIS G 4102 Nickel-Chromium Steel	SNC236	—	—	—	—	—	40XH
	SNC415	—	—	—	—	—	—
	SNC631	—	—	—	—	—	30XH3A
	SNC815	15NiCr13	—	655M13	15NiCr13	—	—
	SNC836	—	—	—	—	—	—
JIS G 4103 Nickel Chrome Molybdenum Steel	SNCM220	20NiCrMo2 20NiCrMoS2	8615 8617 8620 805A22 805M22	805A20 805M20 805A22 805M22	20NiCrMo2 20NiCrMoS2	20NCD2	—
	SNCM240	41CrNiMo2 41CrNiMoS2	8637 8640	—	—	—	—
	SNCM415	—	—	—	—	—	—
	SNCM420	—	4320	—	—	—	20XH2M(20XHMM)
	SNCM431	—	—	—	—	—	—
	SNCM439	—	4340	—	—	—	—
	SNCM447	—	—	—	—	—	—
	SNCM4616	—	—	—	—	—	—
	SNCM625	—	—	—	—	—	—
	SNCM630	—	—	—	—	—	—
SNCM815	—	—	—	—	—	—	
JIS G 4104 Chrome Steel	SCr415	—	—	—	17Cr3 17CrS3	—	15X 15XA
	SCr420	20Cr4 20CrS4	5120	—	—	—	20X
	SCr430	34Cr4 34CrS4	5130 5132	34Cr4 34CrS4	34Cr4 34CrS4	34Cr4 34CrS4	30X
	SCr435	34Cr4 37Cr4 37CrS4	5132	37Cr4 37CrS4	37Cr4 37CrS4	37Cr4 37CrS4	35X
	SCr440	37Cr4 37CrS4 41Cr4 41CrS4	5140	530M40 41Cr4 41CrS4	41Cr4 41CrS4	41Cr4 41CrS4	40X
	SCr445	—	—	—	—	—	45X
	SCM415	—	—	—	—	—	—
	SCM418	18CrMo4 18CrMoS4	—	—	18CrMo4 18CrMoS4	—	20XM
SCM420	—	—	708M20	—	—	20XM	
SCM421	—	—	—	—	—	—	
SCM430	—	4131	—	—	—	30XM 30XMA	
SCM432	—	—	—	—	—	—	
SCM435	34CrMo4 34CrMoS4	4137	34CrMo4 34CrMoS4	34CrMo4 34CrMoS4	34CrMo4 34CrMoS4	35XM	
SCM440	42CrMo4 42CrMoS4	4140 4142	709M40 42CrMo4 42CrMoS4	42CrMo4 42CrMoS4	42CrMo4 42CrMoS4	—	
SCM445	—	4145 4147	—	—	—	—	
SCM822	—	—	—	—	—	—	
JIS G 4107 High Temperature Alloy Steel for Bolts	SNB5	—	501	708M40 4140 4142	42CrMo42	42CrMo44	—
	SNB7	42CrMo4 42CrMoS4	4140 4142 4145	709M40 42CrMo41	—	—	—
	SNB16	—	—	40CrMoV4—61	40CrMoV473	40CrMoV4—64	—
JIS G 4108 Steel Bar for Special-Purpose Alloy Bolts	SNB21—1-5	—	—	40CrMoV4—61	40CrMoV473	40CrMoV4—64	—
	SNB22—1-5	42CrMo4 42CrMoS4	4142H	—	42CrMo42	—	—
	SNB23—1-5	—	E4340H	—	—	—	—
	SNB24—1-5	—	4340	—	—	—	—

**Cautions**

- 1) BS EN 10259
- 2) DIN 1654 Part 4
- 3) DIN 17240
- 4) NF EN 10259
- 5) ISO683-1, 10 and 11 have been translated into JIS as JIS G 7501, G 7502 and G 7503.

ISO: International Organization for Standardization

AISI: American Iron and Steel Institute

SAE: Society of Automotive Engineers

BS: British Standards

DIN: Deutsches Institut für Normung

EN: European Standards

NF: Norme Francaise

ГОСТ: National Standards of Former USSR

**Names of Tool Steels**

- Roller Steel for General Structure SS400 . . . . . Steel, Structure, 400N/mm<sup>2</sup>
- Carbon Steel for Mechanical Structure S45C . . . . . Steel, 0.45%C
- Chrome Molybdenum Steel SCM435 . . . . . Steel, Cr, Mo 435
- Nickel Chrome Molybdenum Steel SNCM220 . . . . . Steel, Ni, Cr, Mo 220
- Carbon Tool Steel SK105 . . . . . Steel, Tool (Kogu, in Japanese), Type105 (Old SK3)
- Alloy Tool Steel SKS3 . . . . . Steel, Tool (Kogu, in Japanese), Special, Type 3
- Alloy Tool Steel SKD11 . . . . . Steel, Tool (Kogu, in Japanese), Dies, Type 11
- High-Speed Tool Steel SKH51 . . . . . Steel, Tool (Kogu, in Japanese), High Speed, Type 51
- High Carbon Chrome Bearing Steel SUJ2 . . . . . Steel, Use, Bearing, Type 2
- Stainless Steel SUS304 . . . . . Steel, Use, Stainless, Type 304
- Gray Cast Iron FC250 . . . . . Ferrum (Iron), Cast, 250N/mm<sup>2</sup>



# Materials Data

## Comparisons of Materials Between JIS and Foreign Standards 2

### Stainless Steel, Heat-Resisting Steel

Japan Industrial Standards	International Standard	Foreign Standards							European Standard	
		US		UK	Germany	France	Russia (Former USSR)	EN	Type	No.
		UNS	AISI	BS	DIN	NF	Г OCT	Type		
JIS G 4303-4305	SUS 201	12	S20100	201			Z12CrNi17-07Az		X12CrNi17-7-5	1.4372
Bar	SUS 202		S20200	202	28AS16		X12CrNi17-7	12X17 G 9AHH	X12CrNi18-9-5	1.4373
Hot-Rolled Plate and Band	SUS 301	5	S30100	301	301S21		X12CrNi18-7	07X16H6	X2CrNi18-7	1.4318
Cold-Rolled Plate and Band	SUS 301L	4					X2CrNi18-7			
JIS G 4306-4309	SUS 301J1						X12CrNi17-7			
Wire Rod	SUS 302		S30200	302	302S25		Z12CrNi18-09	12X18H9		
Wire	SUS 302B		S30215	302B			X10CrNiSi18-9	Z80NF18-09	X8CrNiSi18-9	1.4305
JIS G 4313-4315	SUS 303	13	S30300	303	303S21		X2CrNi19-11	12X18H10E		
Band for Spring	SUS 304	6	S30400	304	304S31		X2CrNi19-11	03X18H11	X2CrNi19-11	1.4307
Wire for Cold Forging	SUS 304L	1	S30403	304L	304S11		X2CrNi19-11			
JIS G 4317-4320	SUS 304N1	2	S30451	304N			Z6CrNi19-09Az		X2CrNi18-9	1.4306
Hot-Rolled Equal-Leg Angle	SUS 304N2		S30452							
Cold-Finished Bar	SUS 304LN	3	S30453	304LN			X2CrNi18-10	Z30CrNi18-10Az	X2CrNi18-10	1.4311
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									
Hot-Rolled Equal-Leg Angle	SUS 304J2									
Cold-Finished Bar	SUS 304J2									
Steel Piece for Forged Article	SUS 304J2									



# Materials Data

## Steel Brand Comparative Table / Hardness of Materials and Corresponding Tools

### ■ Steel Brand Comparative Table

Type	Steel Types Related to the Foreign Standards				Hitachi Metals, Ltd.	Aichi Steel Works, Ltd.	Kobe Steel Co., Ltd.	Sanyo Special Steel Co., Ltd.	Daido Steel Co., Ltd.	Nippon Koshuha Steel Co., Ltd.	Nachifujikoshi	Riken Steel	Uddeholm (Sweden)	Bohler (Germany)
	JIS	AISI	DIN	ISO										
Carbon Tool Steel	SK105(Old SK3)	W1-10		TC105	YC3	SK3		OK3	YK3	K3				K990
	SKS33				YCS3	SK301		OKSM	YK30	K3M	SK3M			K460
	SKS3				SGT	SKS3		OKS3	G0A	KS3	SKS3	RS3	ARNE	K107
	SKD1	D3		X210C12	CRD	SKD1		OC1	DC1	KD1			SVERKER3	K105
	SKD11	D2	X210C12	X210C12W12	SLD	SKD11		OC11	DC11	KD11	CD511	RD11	SVERKER21	K110
	SKD11(Modification)				SLD8	AUD15		OCM8	DC53	KD11S	MD59		SLEIPNER	K340
	Matrix Group CrSKD				SLD10	AUD15		OCM10	DC53	KD11S	MD59		SLEIPNER	K340
	SKD12			X100CrMoV5	ARK1	SXACE		OCM7	DCX					
	Pre-Hardened 40HRC	A2			SCD	SKD12			DC12	KD12			RIGOR	K305
	Pre-Hardened 50HRC or more				HPM2T				G040F	KAP65			IMPAX	
Alloy Tool Steel	Flame-Hardened Steel				PRE2			CM1	PC55					
	Low Temperature Air Cooled Steel				HMD5	SK105V	OF3	G05	FH5				FERNO	
	Shock Resistance Steel				HMD1	SK4		G04	KSM					
					ACD37	AKS3		G04	KSM					
					YSM	AKS4	OF1	G55	KTV5	SRS6			PREGA COMPAX	K630
													CALMAX VRING	
													ELMAX	
													WANADIS4	
													WANADIS5	
													WANADIS10	
High-Speed Tool Steel	SKH51	M2	H6.5.2	HS6-5-2	YXM1		QH51	MH51	H51	SKH9	RHM1		S600	
	SKH55 Group		S6.2.5	HS6-5-2-5	YXM4			MH55	HMS5	HM35	RHM5		S705	
	SKH57 Group		S10-4-3-10	HS10-4-3-10	XVC5			MH8	MV10	HS3M	RHM7		S700	
										HS9R				
										HS9M				
P/M High Speed Tool Steel	SKH40			HS6-5-3-8	HAP40	KHA30		DEX40			FAX38	ASP30	S590	
	Matrix Group				HAP5R	KHA3VN		DEX-M1					S690	
					HAP10			DEX-M3					S790	
													S390	

Reference:"Special Steel", Nov. 2001

Matrix Group: This is a type of tool steels that has enhanced machinability and toughness by decreasing the large-size carbide responsible for expedited tool abrasion during a cutting process and flexibility reduction.

Machining Method			Equipment		Required Tool		Material															
Machining	Machining Method	Equipment	Required Tool	Tool Material	Parts Material	For Press Die	Machined Material															
							Non-Ferrous Metal	Untreated		Thermal Refined		Hardening/Tempered										
							(Al)	(Al-alloy)	SKD11	(Be-Cu)		DC53(Carbide)										
								S45C	S50C	DC53	HPM2T	SCM435	S45C	SKD11	SKS3	SKH51	SUJ2					
							CU	STAVAX ESR	SKD61	HPM7	NAK55	(Electroforming-Outside)		(Electroforming-Inside)								
							BsBM2	RIGOR(SKD12 Group)		HPM1	NAK80	ORAVAR SUPREME										
										HPM38	FDAC	(Age-Hardened)MAS1C										
										STAVAX ESR	DH2F	HPM38	S-STAR	RIGOR	SKD12 Group							
								HRC	10	20	30	40	50	60	70							
Machining	Hole Machining on Side and Bottom	General Purpose Milling Cutter HC Milling Cutter Machining Center	Drills Reamer End Mills Cutting Tools	Drills	High-Speed Steel	SKH-																
				Reamer	Carbide	Wn-Co																
				Tapped	High-Speed Steel	SKH-																
Machining	Hole Machining	Drilling Machine Drill Press Boring Machine Jig Borer	Drills Tapped Reamer Cutting Tools	Drills	High-Speed Steel	SKH-																
				Reamer	Carbide	Wn-Co																
				End Mills	High-Speed Steel	SKH-																
Machining	Cylinders	General Purpose Lathe HC Lathe Turning Center	Drills Reamer Tapped Reamer Cutting Tools	Drills	High-Speed Steel	SKH-																
				Reamer	Carbide	Wn-Co																
				Cutting Tools	Boron	CBN																
Grinding		Surface Grinder Cylindrical Grinder Jig Grinder Profile Grinder Forming Grinder	Grindstone	Grindstone	White Fused Alumina	WA																
					Brown Fused Alumina	A																
					Pink Fused Alumina	PA																
					Green Silicon Carbide	GC																
					Black Silicon Carbide	C																
					Electrodeposited Boron	CBN																
					Electrodeposited Diamond	D																
				Electric Discharging	EDM	Electrode Master	Wire	Electrode Master	Electrolytic Copper, Brass	CU-												
	Copper Tungsten, Silver Tungsten	-Wn																				
	Brass	CU-Zn																				
	WEDM			Wire	Tungsten	Wn																



# Index

## A

- Absorbers, Shock . . . . . 73
- Accessories, Idlers . . . . . 39
- Actuators
  - Linear . . . . . 20
  - Positioning . . . . . 20
- Adaptors, Hydraulic Hoses . . . . . 104-105
- Adjusting Screws . . . . . 49-51
- Adjustment Units, Simplified . . . . . 58
- Air Grippers . . . . . 116
- Aluminum Extrusion . . . . . 79-80
- Angle
  - Brackets . . . . . 86
  - Plates . . . . . 63
- Antistatic Materials . . . . . 75
- Antivibration . . . . . 74
- Automotive Inspection Components . . . . . 54-56

## B

- Ball
  - Guides . . . . . 16-17
  - Screw . . . . . 24-25
  - Splines . . . . . 17
- Bases, Hinge . . . . . 119-120
- Bearings . . . . . 31
  - Accessories . . . . . 31
  - Rod End . . . . . 119
  - Spherical . . . . . 119
  - with Housings . . . . . 31
- Belts
  - Conveyors . . . . . 35-37
  - Timing . . . . . 39
- Blocks, Stopper . . . . . 48-49
  - Threaded . . . . . 49-51
- Blowers . . . . . 116
- Bolts . . . . . 66, 119-120
- Boxes, Metal . . . . . 63
- Brackets
  - Angle . . . . . 86
  - Mounting . . . . . 125-124, 127
- Brushes, Industrial . . . . . 75
- Bushings
  - Linear . . . . . 15-16
  - Locating . . . . . 43-48
  - Oil-Free . . . . . 18-19

## C

- Cable Carriers . . . . . 23
- Cables, Link . . . . . 119
- Cams, Sensor . . . . . 121
- Cantilever Shafts . . . . . 29
- Casters . . . . . 83-85
- Catches . . . . . 92
- Ceramics . . . . . 81
- Chain Conveyors, Plastic . . . . . 35-37
- Chains . . . . . 41-42, 69
  - Plastic . . . . . 42
  - Conveyors . . . . . 35-37
- Clamps
  - Toggle . . . . . 54
  - Workpiece . . . . . 51-52, 54
- Collars . . . . . 64-65
  - Shaft . . . . . 14
- Components
  - Guide . . . . . 51
  - Locating . . . . . 51
  - Suction . . . . . 113-114
- Compressors . . . . . 116

- Connecting
  - Components, Cylinder . . . . . 116-118
  - Bars . . . . . 119
- Contact Probe . . . . . 56-57
- Conveyors
  - Belt . . . . . 35-37
  - Chain . . . . . 42
    - Plastic . . . . . 35-37
  - Timing Belts . . . . . 39
- Cooling Related Products . . . . . 122-123
- Copper Pipes . . . . . 95
- Cotter Pins . . . . . 68-69
- Couplers . . . . . 100-101
- Couplings . . . . . 32-33
  - One-Touch . . . . . 100-101
  - Shaft . . . . . 32-33
- Covers, Transparent Plastic . . . . . 82
- Crank Handles . . . . . 87-88
- Cross Roller . . . . . 22
- Cups, Suction . . . . . 113-114
- Cylinders . . . . . 116
  - Connecting Components . . . . . 116-118

## D

- DIN Rails . . . . . 60, 61
- Door Stays . . . . . 93
- Dowel Pins . . . . . 68
- Draw Latches . . . . . 93
- Drive Shafts . . . . . 28
- Duct
  - Hoses . . . . . 103
  - Plumbing Components . . . . . 103

## E

- Ejectors, Vacuum . . . . . 111

## F

- Fasteners . . . . . 93
- Feet, Rubber . . . . . 85-86
- Fences . . . . . 80-81
- Felt . . . . . 76-77
- Filters . . . . . 112-113
  - Vacuum . . . . . 111
- Fitting Parts, Vacuum . . . . . 107
- Fittings
  - Grease . . . . . 69
  - Metal . . . . . 69
  - Pneumatic Pipe . . . . . 108-111
  - Screw . . . . . 96-99
- Flags, Sensor . . . . . 121
- Flat Belts, Pulleys . . . . . 38
- Flexible Hoses . . . . . 104
- Flow Rate
  - Controllers . . . . . 118-119
  - Sensors . . . . . 112
- Fulcrum Pins . . . . . 30

## G

- Gas Springs . . . . . 74
- Gauges, Vacuum . . . . . 112
- Gears . . . . . 40-41
- Generators
  - Hot Air . . . . . 122
  - Vacuum . . . . . 111
- Glass . . . . . 81
- Grease Fittings . . . . . 69
- Guide
  - Components . . . . . 51

- Rails, Oil-Free . . . . . 19
- Guides, Linear . . . . . 21-22
- Gussets . . . . . 63

## H

- Hand Wheels . . . . . 87-88
- Handles . . . . . 87
  - Crank . . . . . 87-88
  - Latch . . . . . 93
  - Pull . . . . . 89-91
  - Rotation . . . . . 87-88
- Hanger Hooks . . . . . 89
- Heaters . . . . . 122
- Heat Insulating Plates . . . . . 122
- Hinges . . . . . 91-92
  - Bases . . . . . 119-120
  - Pins . . . . . 30
- Hooks . . . . . 66
  - Hanger . . . . . 89
- Hoses
  - Duct . . . . . 103
  - Flexible . . . . . 104
  - Resins . . . . . 103
- Hot Air Generators . . . . . 122
- Hydraulic
  - Adaptors . . . . . 104-105
  - Hoses . . . . . 104-105
  - Valves . . . . . 104

## I

- Idlers Accessories . . . . . 39
- Index Plungers . . . . . 52-53
- Industrial Brushes . . . . . 75
- Insert . . . . . 69

## J

- Joint Plates . . . . . 119-120

## K

- Keys . . . . . 93
  - Machine . . . . . 68
- Knobs . . . . . 88-89

## L

- Latch Handles . . . . . 93
- Latches, Draw . . . . . 93
- Lead Screws . . . . . 26-27
- Lenses, Optical . . . . . 60
- Leveling Mounts . . . . . 85-86
- Levers . . . . . 86-87
- Linear
  - Actuators . . . . . 20
  - Bushings . . . . . 15, 16
  - Guides . . . . . 21-22
  - Rails . . . . . 22, 23
  - Shafts . . . . . 10-12
- Links . . . . . 120
  - Cables . . . . . 119
- Locating
  - Bushings . . . . . 43-48
  - Components . . . . . 51
  - Pins . . . . . 43-48
  - Units . . . . . 51
- Locks . . . . . 93
- Lubricators . . . . . 112-113





# Index

## M

- Machine Keys . . . . . 68
- Magnets . . . . . 70
- Mag Tran . . . . . 41
- Manifolds . . . . . 93–95
- Manual
  - Stages . . . . . 58–59
  - Valves . . . . . 112
- Materials
  - Metal . . . . . 71
  - Plastic . . . . . 72
  - Safety Protection . . . . . 74–75
- Mechanical Valves . . . . . 112
- Mesh . . . . . 81
- Metal
  - Boxes . . . . . 63
  - Fittings . . . . . 69
  - Materials . . . . . 71
- Metals, Perforated . . . . . 80–81
- Mirror . . . . . 81
- Motorized Stages . . . . . 59
- Mounting
  - Brackets . . . . . 125–127
  - Plates . . . . . 125–127
- Mounts, Leveling . . . . . 85–86

## N

- Nets . . . . . 80–81
- Nozzles . . . . . 114–116
- Nuts . . . . . 67

## O

- Oil-Free
  - Bushings, Washers . . . . . 18–19
  - Plates, Guide Rails . . . . . 19
- Optical Lenses . . . . . 60

## P

- Packs, Slide . . . . . 22–23
- Panels . . . . . 80–81
- Parts . . . . . 70
- Perforated Metals . . . . . 80–81
- Pieces, Small Work . . . . . 70
- Pins
  - Cotter . . . . . 68–69
  - Dowel . . . . . 68
  - Hinge . . . . . 30
  - Locating . . . . . 43–48
  - Spring . . . . . 68
  - Stepped . . . . . 68
  - Stop . . . . . 48–49
- Pipes
  - Copper . . . . . 95
  - Frames . . . . . 80
  - Pneumatic Fittings . . . . . 108–111
  - Sanitary . . . . . 105–106
  - Stainless Steel . . . . . 95
  - Steel . . . . . 95
  - Supports . . . . . 103
- Plastic
  - Chain Conveyors . . . . . 35–37
  - Chains . . . . . 42
  - Covers, Transparent . . . . . 82
  - Materials . . . . . 72
- Plates . . . . . 69–70
  - Joint . . . . . 119–120
  - Mounting . . . . . 125–27

- Oil-Free . . . . . 19
- Plugs, Screw . . . . . 68
- Plumbing Components, Duct . . . . . 103
- Plungers . . . . . 52–53
  - Index . . . . . 52–53
- Pneumatic Pipe Fittings . . . . . 108–111
- Positioning Actuators . . . . . 20
- Posts . . . . . 62–63
- Pressure Sensors . . . . . 112
- Pull Handles . . . . . 89–91
- Pulleys . . . . . 39
  - Round Belts . . . . . 38

## R

- Rails
  - DIN . . . . . 60–61
  - Guides, Oil-Free . . . . . 19
  - Linear . . . . . 22–23
  - Sensor . . . . . 60–61
  - Telescopic Slide . . . . . 22
- Regulators . . . . . 112–113
- Resins Hoses . . . . . 103
- Retaining Rings . . . . . 69
- Rings, Retaining . . . . . 69
- Rod Ends . . . . . 119
- Rollers . . . . . 34
  - Cross . . . . . 22
- Rotary Shafts . . . . . 28
- Rotation Handles . . . . . 87–88
- Round Belts, Pulleys . . . . . 38
- Rubber
  - Feet . . . . . 85–86
  - Urethane . . . . . 76–77

## S

- Safety Protection Materials . . . . . 74–75
- Sanitary Pipes . . . . . 105–106
- Screw
  - Fittings . . . . . 96–99
  - Plugs . . . . . 68
  - Washers . . . . . 67
- Screws . . . . . 66, 88–89
  - Adjusting . . . . . 49–51
  - Lead . . . . . 26–27
  - Slide . . . . . 26–27
- Sensors
  - Accessories . . . . . 60
  - Cams . . . . . 121
  - Flags . . . . . 121
  - Flow Rate . . . . . 112
  - Pressure . . . . . 112
  - Rails . . . . . 60–61
  - Temperature . . . . . 123
- Shackles . . . . . 66
- Shafts
  - Cantilever . . . . . 29
  - Collars . . . . . 14
  - Couplings . . . . . 32–33
  - Linear . . . . . 10–12
    - Drive . . . . . 28
  - Rotary . . . . . 28
  - Supports . . . . . 12–13
- Shims . . . . . 65–66
- Shock Absorbers . . . . . 73
- Silencers . . . . . 113
- Simplified Adjustment Units . . . . . 58
- Slide
  - Packs . . . . . 22–23
  - Rails, Telescopic . . . . . 22

- Screws . . . . . 26–27
- Small Work Pieces . . . . . 69–70
- Sound Proofing . . . . . 74
- Spherical Bearings . . . . . 119
- Sponge . . . . . 76–77
- Spring Pins . . . . . 68
- Springs . . . . . 72–73
  - Gas . . . . . 74
- Sprockets . . . . . 41–42
- Conveyor . . . . . 42
- Stages
  - Manual . . . . . 58–59
  - Motorized . . . . . 59
- Stainless Steel Pipes . . . . . 95
- Standoffs, Welded . . . . . 63
- Stands . . . . . 62–63
- Steel Pipes . . . . . 95
- Stepped Pins . . . . . 68
- Stickers . . . . . 69–70
- Stop Pins . . . . . 48–49
- Stopper Blocks . . . . . 48–49
  - Threaded . . . . . 49–51
- Strut Clamps . . . . . 62–63
- Suction
  - Cups . . . . . 113–114
  - Components . . . . . 113–114
- Support Units . . . . . 25
- Supports, Shaft . . . . . 12–13
- Switches . . . . . 61–62

## T

- Tanks . . . . . 106–107
- Telescopic Slide Rails . . . . . 22
- Temperature Sensors . . . . . 123
- Tensioners . . . . . 42
- Threaded Stopper Blocks . . . . . 49–51
- Timing Belts . . . . . 39
- Toggle Clamps . . . . . 54
- Transparent Plastic Covers . . . . . 82
- Tubes . . . . . 107–108

## U

- Urethane, Rubber . . . . . 76–77

## V

- Vacuum
  - Ejectors . . . . . 111
  - Filters . . . . . 111
  - Fitting Parts . . . . . 107
  - Gauges . . . . . 112
  - Generators . . . . . 111
- Valves . . . . . 101–102
  - Hydraulic . . . . . 104
  - Manual . . . . . 112
  - Mechanical . . . . . 112
- V Guides . . . . . 22–23

## W

- Washers . . . . . 64–65
  - Oil-Free . . . . . 18–19
  - Screw . . . . . 67
- Welded Standoffs . . . . . 63
- Wheels . . . . . 85
  - Hand . . . . . 87–88
- Wires . . . . . 69, 119
- Workpiece Clamps . . . . . 51–52, 54



**NOTE:** The complete Terms and Conditions applicable to the products and purchases from this catalog are found at: <http://us.misumi-ec.com/contents/terms/>.

## Express Limited Warranty (Annex-B)

---

MISUMI USA, Inc. (the "Company") has a Mechanical Components for Assembly Automation Catalog (the "Catalog") that lists products for sale (the "Products") which are subject to the Terms and Conditions of Catalog Use (the "Terms and Conditions"). The Company provides an Express Limited Warranty (the "Limited Warranty") for Products that is further set forth in this Annex A. Customer, through their purchase of Products, agrees to be bound by this Limited Warranty. A manufacturer guarantee certificate or warranty may also apply to certain Products, which shall supersede and void this Limited Warranty as to such Product(s).

### A. Scope of Limited Warranty

1. Company warrants that the Products shall be free of defects in material and workmanship. During the Warranty Period, the Company at its sole discretion may repair or replace a Product with a defect attributable to the Company ("Defect") free of charge on condition that the customer provides the Company with written notice describing the alleged defect, within the warranty period (defined in the Limited Warranty), and the Company deems the alleged defect covered under this Limited Warranty. Minor flaws such as scratches, marks, dents or discoloration that do not affect the function of the Product do not constitute a Defect, unless the Company, in its sole discretion, deems such flaw to be a Defect.

### 2. EXCLUSIONS

This Limited Warranty does not cover damages or defects to Products resulting from or in any way contributed to:

- (1) Use in devices that transport humans such as automobiles, vehicles, or ships; medical equipment with the purpose of curing or diagnosing humans; or general household consumer goods such as electronic and electric equipment.
- (2) Use in aerospace equipment, nuclear energy equipment, or military-related products such as weapons or arms.
- (3) Customer's reckless, negligent or abusive handling or use of the Product.
- (4) Natural disasters including, but not limited to, earthquakes, fires and floods.
- (5) Failure to comply with Product specifications, intended uses, Terms and Conditions, drawings; or documentation shipped with the Product or accessory.
- (6) Any repair, modification, processing or disassembly of the Product.
- (7) Damage to equipment other than the Product itself.
- (8) Use outside of the country where the Company originally shipped the Product at the time of purchase.

### B. Warranty Period

This Limited Warranty is valid for a period of one (1) year from the date Company ships Product to original purchaser.

### C. Inspection and Notification

Within one (1) week of receipt of Product, customer should confirm the name, quantity and specifications of the Product(s) and check for any Defect. The customer must provide written notice to the Company within one (1) week of receipt of Product, or the Company may deem that the Product(s) are free from Defect.

### D. Uncovered Products

The customer will be charged for all replacements and repairs of Product not covered by this Limited Warranty.

### E. LIMITATION OF LIABILITY

IN NO EVENT SHALL COMPANY BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES, INCLUDING BUT NOT LIMITED TO, ANY CLAIMS OF PROPERTY DAMAGE, BASED UPON BREACH OF WARRANTY, BREACH OF CONTRACT, TORT, OR ANY OTHER LEGAL THEORY. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you.

### F. LIMITATION OF WARRANTY

THIS LIMITED WARRANTY IS THE EXCLUSIVE WARRANTY FOR THE PRODUCT. COMPANY DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR PARTICULAR PURPOSE OR OTHERWISE. PRODUCTS ARE SOLD BUSINESS TO BUSINESS AND NOT TO CONSUMERS, RENDERING ANY CONSUMER LAW INAPPLICABLE. IN NO EVENT SHALL COMPANY'S LIABILITY WITH REGARD TO THE SALE OF PRODUCT EXCEED THE ORIGINAL PURCHASE PRICE PAID BY CUSTOMER.

### G. ENTIRE AGREEMENT

This Limited Warranty contains and represents the only warranty extended by Company for the Product. No employee or agent of Company or any other party is authorized to make any other warranty in addition to those made in this Limited Warranty. This Limited Warranty gives you specific legal rights and you may also have other rights which vary from state to state.

### H. MODIFICATION OR DISCONTINUATION OF PRODUCTS.

Company reserves the right to discontinue or modify the Product at any time without notice. In the event that repair or replacement of the Product pursuant to this Limited Warranty is not possible, Company will fulfill any repair or replacement obligation under this Limited Warranty with a product of equal or greater value.

# MISUMI Global Network

**MISUMIUSA.COM**  
FIND IT AND CONFIGURE ON THE WEB

Enter Web Code (ex. #SFJ)



★ Head Quarters MISUMI Corporation

Company Name	Phone & Fax	Address	Area
<b>A</b> MISUMI USA, INC.	TEL: +1-847-843-9105 FAX: +1-847-843-9107	1717 Penny Lane, Suite 200, Schaumburg, IL 60173, U.S.A.	North America Central America South America
<b>B</b> MISUMI EUROPA GMBH	TEL: +49-6196-7746-0 FAX: +49-6196-7746-360	Katharina-Paulus-Strasse 6, 65824 Schwalbach, Germany	Europe Turkey Africa
<b>C</b> MISUMI (CHINA) PRECISION MACHINERY TRADING CO., LTD.	TEL: +86-21-6391-7080 FAX: +86-21-6391-7602	11th Floor, Raffles City Shanghai, 268 Xizang Middle Road, Shanghai 200001	China
<b>D</b> MISUMI E.A. HK LTD.	TEL: +852-8303-2781 FAX: +852-8303-2782	3/F., Malaysia Building, 50 Gloucester Road, Wanchai, Hong Kong	Hong Kong
<b>E</b> MISUMI KOREA CORP.	TEL: +82-2-551-3611 FAX: +82-2-551-4811	3804 World Trade Center, 159-1, Samsung-dong, Kangnam-gu, Seoul 135-729, Korea	Korea
<b>F</b> MISUMI TAIWAN CORP.	TEL: +886-2-2570-3766 FAX: +886-2-2570-3767	9F-1, No. 126 Nanjing East Road Sec. 4 Taipei 10595 Taiwan R.O.C	Taiwan
<b>G</b> MISUMI (THAILAND) CO., LTD.	TEL: +66-38-959-200 FAX: +66-38-959-202	300/24 Moo 1, Eastern Seaboard Industrial Estate Soi 5, Tambol Tasith, Amphur Pluakdaeng, Rayong Province 21140, Thailand	Thailand
<b>H</b> MISUMI SOUTH EAST ASIA PTE. LTD.	TEL: +65-6733-7211 FAX: +65-6733-0211	331 North Bridge Road, #05-03 Odeon Towers, Singapore 188720	Southeast Asia (excluding Malaysia, Thailand, Indonesia) Australia
<b>I</b> MISUMI MALAYSIA SDN. BHD.	TEL: +60-3-7960-8499 FAX: +60-3-7960-7499	Unit 1206, 12th Floor Menara Amcorp No.18, Jalan Persiaran Barat 46050 Petaling Jaya, Selengor, Malaysia	Malaysia
<b>J</b> MISUMI INDIA PVT. LTD.	TEL: +91-12-4468-8800 FAX: +91-12-4468-8811	Plot #241, Udyog Vihar, Phase-I, Sector 20, Gurgaon, Haryana-122001 India	India
<b>K</b> PT. MISUMI INDONESIA	TEL: +62-21-5789-5837 FAX: +62-21-5789-5836	Menara Karya, Lt. 28. Jl. H.R. Rasuna Said Kav 1-2, Kuningan Jakarta, Selatan 12950, Indonesia	Indonesia



**MISUMI USA, INC.**

**USA CORPORATE HEADQUARTERS**

1717 PENNY LANE SUITE 200  
SCHAUMBURG, IL 60173

TEL: 800.681.7475  
FAX: 800.681.7402  
WWW.MISUMIUSA.COM

**DISTRIBUTION CENTER LOCATIONS**

**CHICAGO DISTRIBUTION CENTER**

2400 LUNT AVENUE  
ELK GROVE VILLAGE, IL 60007

**LOS ANGELES DISTRIBUTION CENTER**

19701 MAGELLAN DRIVE  
TORRANCE, CA 90502