

Agricultural Bearings





Our Commitment

Our commitment to the future of PEER is built on fulfilling your needs. Your satisfaction as a customer is the foundation of PEER and is supported by...


- First class customer service
- On-time scheduled delivery
- Continuous product innovation
- Production to customized specifications
- In-depth inventory
- Technical and engineering support
- In-house and independent test facilities
- Strong complimentary bearing & chain products
- QS9000 / ISO/TS 16949 : 2002 certified manufacturing plants
- Superior quality in features and appearance



| | |
|--|--------------|
| Flanged Disc Units | 2 |
| Disc Harrow Bearings | |
| Round Bore Non-Relubricable | 3 |
| Round Bore Relubricable | 4 |
| Square Bore Non-Relubricable | 5 |
| Square Bore Relubricable | 6 |
| Hex Bore Series... | 7 |
| 200 Series..... | 8 |
| Special Bearings & Assemblies..... | 9-15 |
| Engineering Section | |
| Ag Bearing Components, Seals | 16 |
| Grease and Grease Properties | 17 |
| Radial Internal Clearance | 18 |
| Load Rating and Basic Rating Life..... | 19, 20 |
| Housing Fit Selection for Ball Bearings with Cylindrical Outside Diameters..... | 21-23 |
| Interchange | 24-26 |
| Notes..... | 27 |


HOUSED UNITS ALSO AVAILABLE:

PEER is able to install bearings with beveled O.D. into cast iron, ductile, or pressed steel housings. See examples below. Consult with your PEER salesperson for other available sizes.

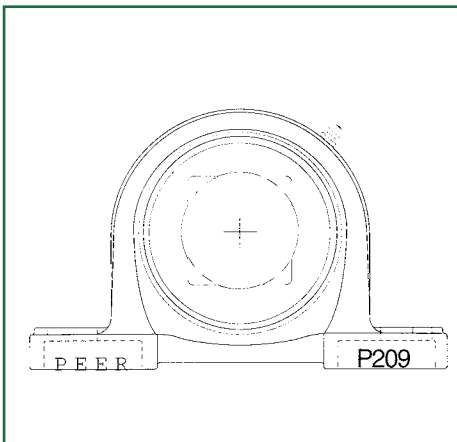


GW209PPB5-P

Consists of GW209PPB5 disc bearing installed in P-209-HA cast iron pillow block.

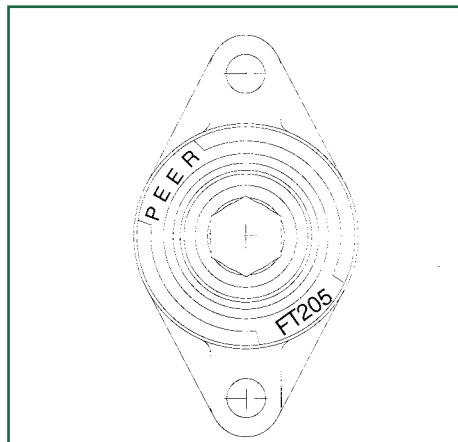

205KRRB2-FT

Consists of 205KRRB2 hex bearing installed in FT-205-H cast iron 2-bolt housing.

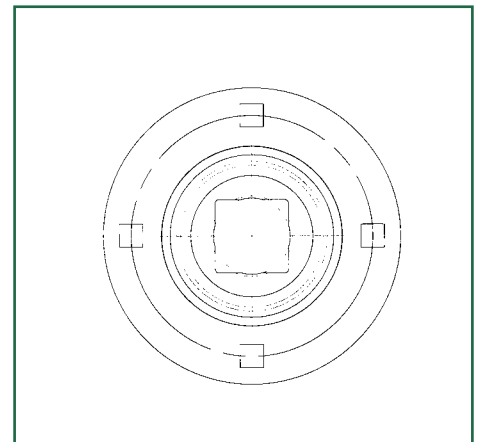



W208PPB12-PFFZ

Consists of W208PPB12 disc bearing installed into PFF-87mm 4-bolt pressed steel housing.



FLANGED DISC UNIT

PEER's Flanged Disc series incorporates a bearing with two, one-piece triple lip shroud seals and two rubber "O" rings. It is encased in two heavy gauge stamped steel housings which are riveted together. Relubricable.

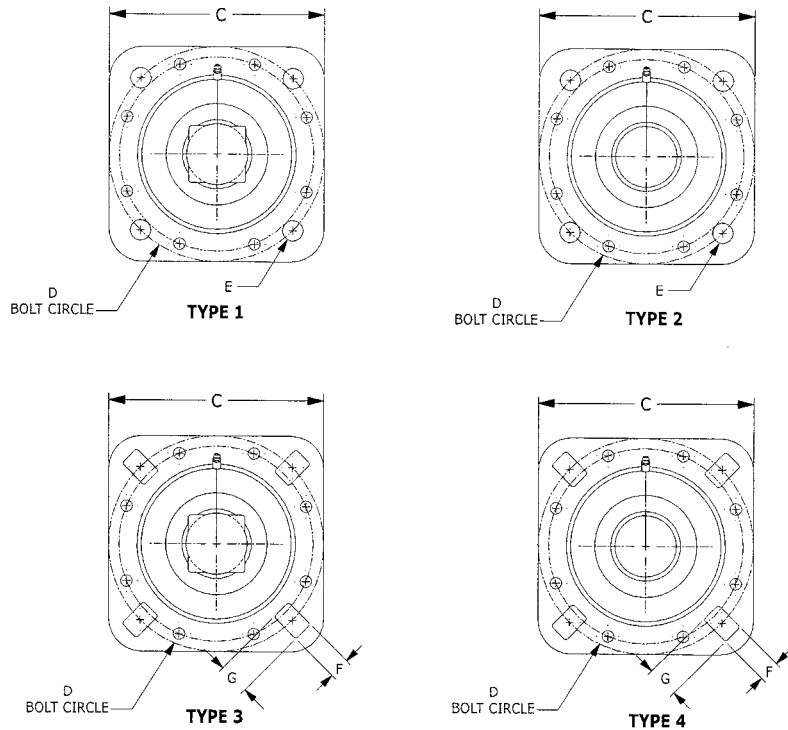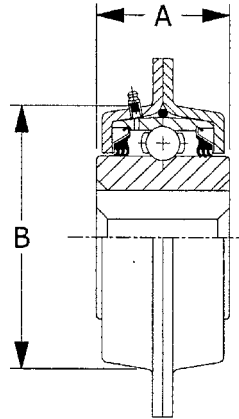

| PEER UNIT NUMBER | TYPE | SHAFT DIAMETER | A | B Min. Frame Opening | C | D | E | F | G |
|-------------------|------|----------------|-------|-------------------------------|-------|-------|-------|-------|-------|
| ST491A | 2 | 1 3/4 RD | 1.687 | 4.000 | 5.000 | 5.000 | 0.531 | | |
| ST491B | 4 | 1 1/2 RD | 1.687 | 4.000 | 5.000 | 5.000 | | 0.531 | 0.687 |
| FD209-1 1/8SQ | 3 | 1 1/8 SQ | 1.687 | 4.000 | 5.000 | 5.000 | | 0.531 | 0.687 |
| FD209-1 1/4SQ | 3 | 1 1/4 SQ | 1.687 | 4.000 | 5.000 | 5.000 | | 0.531 | 0.687 |
| FD211-1 1/2SQ | 3 | 1 1/2 SQ | 2.000 | 4.500 | 5.500 | 5.500 | | 0.531 | 0.687 |
| FD211-1 3/4RD | 2 | 1 3/4 RD | 2.187 | 4.500 | 5.500 | 5.500 | 0.531 | | |
| FD211-1 3/4HX | | 1 3/4 HX | 2.188 | 4.500 | 5.500 | 5.500 | 0.531 | | |
| FD211-1 15/16RD | 2 | 1 15/16 RD | 2.187 | 4.500 | 5.500 | 5.500 | 0.531 | | |
| FD211-1 15/16RDC* | | 1 15/16 RD | 2.125 | 4.500 | 5.500 | 5.500 | 0.531 | | |
| FD211-2 3/16RD | 2 | 2 3/16 RD | 2.187 | 4.500 | 5.500 | 5.500 | 0.531 | | |

* CAN BE USED WITH LOCKING CAM

RD-ROUND SQ-SQUARE HX-HEX

Metric bores also available upon request



Flanged Disc Interchange Chart

| PEER UNIT NUMBER | FAFNIR | BCA |
|------------------|-----------------|------------|
| ST491A | 491A | FD-209-RA |
| ST491B | DHU 1 1/2R-209 | FD-209-RB |
| FD209-1 1/8SQ | DHU 1 1/8S-209 | FD-209-RM |
| FD209-1 1/4SQ | DHU 1 1/4S-209 | FD-209-RK |
| FD211-1 1/2SQ | DHU 1 1/2S-211 | FD-211-RM |
| FD211-1 3/4RD | DHU 1 3/4R-211 | FD-211-RE |
| FD211-1 3/4HX | | FD-211-RKB |
| FD211-1 15/16RD | | FD-211-RK |
| FD211-1 15/16RDC | | FD-211-RJA |
| FD211-2 3/16RD | DHU 2 3/16R-211 | FD-211-RB |

ROUND BORE NON-RELUBRICABLE



Heavy Duty Disc Harrow Bearings are made with triple lip seals to protect from corrosive environments. This seal is a one piece shroud cover with three molded contact seals. This series is lubricated for life.

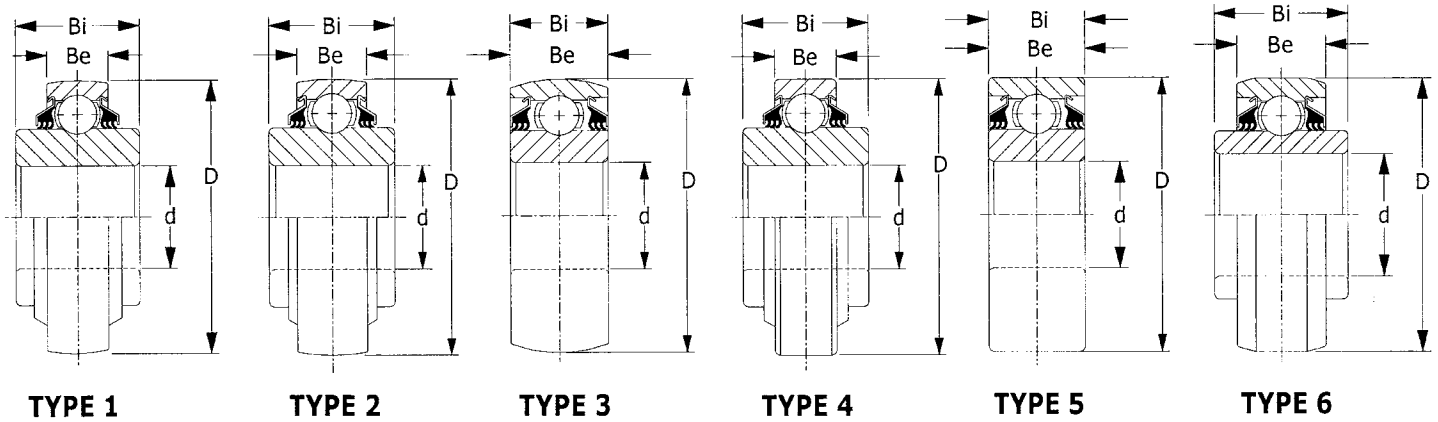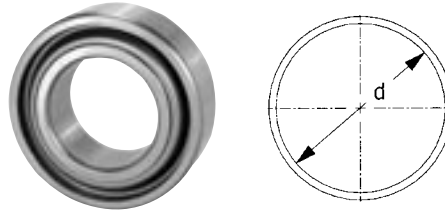


| PEER UNIT NUMBER | TYPE | d | | D | | Be | | Bi | | Load Ratings | | Wt. Lbs. |
|------------------|------|---------|------------------------------|---------|------------------------------|---------|------------------------------|---------|------------------------------|--------------|--------|----------|
| | | nominal | TOL.+0/ to minus shown | nominal | TOL.+0/ to minus shown | nominal | TOL.+0/ to minus shown | nominal | TOL.+0/ to minus shown | Dynamic | Static | |
| W208PPB2 | 1 | 1.5005 | .0005 | 3.1496 | .0005 | .7090 | .0050 | 1.6880 | .0050 | 7,340 | 3,650 | 1.59 |
| | | 38.113 | .013 | 80.000 | .013 | 18.000 | .127 | 42.875 | .127 | | | |
| W208PPB7 | 2 | 1.1880 | .0005 | 3.1496 | .0005 | .7090 | .0050 | 1.1880 | .0050 | 7,340 | 3,650 | 1.41 |
| | | 30.175 | .013 | 80.000 | .013 | 18.000 | .127 | 30.175 | .127 | | | |
| W208PP10 | 4 | 1.5005 | .0005 | 3.1496 | .0005 | .8270 | .0050 | 1.6880 | .0050 | 7,340 | 3,650 | 1.50 |
| | | 38.113 | .013 | 80.000 | .013 | 21.000 | .127 | 42.875 | .127 | | | |
| W208PPB10 | 1 | 1.5005 | .0005 | 3.1496 | .0005 | .8270 | .0050 | 1.6880 | .0050 | 7,340 | 3,650 | 1.59 |
| | | 38.113 | .013 | 80.000 | .013 | 21.000 | .127 | 42.875 | .127 | | | |
| W208PPB23 | 2 | 1.5005 | .0005 | 3.1496 | .0005 | 1.1880 | .0050 | 1.6880 | .0050 | 7,340 | 3,650 | 1.50 |
| | | 38.113 | .013 | 80.000 | .013 | 30.175 | .127 | 42.875 | .127 | | | |
| W209PPB2 | 3 | 1.7717 | .0005 | 3.3460 | .0006 | 1.1880 | .0050 | 1.1880 | .0050 | 7,350 | 4,150 | 1.45 |
| | | 45.000 | .013 | 85.000 | .015 | 30.175 | .127 | 30.175 | .127 | | | |
| W209PPB4 | 3 | 1.5350 | .0100 | 3.3460 | .0060 | 1.1880 | .0050 | 1.1880 | .0050 | 7,350 | 4,150 | 1.65 |
| | | 39.000 | .254 | 85.000 | .015 | 30.175 | .127 | 30.175 | .127 | | | |
| W210PP2 | 5 | 1.9380 | .0005 | 3.5433 | .0006 | 1.1880 | .0050 | 1.1880 | .0050 | 7,880 | 4,650 | 1.69 |
| | | 49.225 | .013 | 90.000 | .015 | 30.175 | .127 | 30.175 | .127 | | | |
| W210PPB2 | 3 | 1.9380 | .0005 | 3.5430 | .0006 | 1.1880 | .0050 | 1.1880 | .0050 | 7,880 | 4,650 | 1.56 |
| | | 49.225 | .013 | 90.000 | .015 | 30.175 | .127 | 30.175 | .127 | | | |
| W210PPB5 | 3 | 1.7850 | .0100 | 3.5430 | .0006 | 1.1880 | .0050 | 1.1880 | .0050 | 7,880 | 4,650 | 1.75 |
| | | 45.339 | .254 | 90.000 | .015 | 30.175 | .127 | 30.175 | .127 | | | |
| W210PP8 | 5 | 1.5300 | .0100 | 3.5433 | .0006 | 1.1880 | .0050 | 1.1880 | .0050 | 7,880 | 4,650 | 1.97 |
| | | 38.862 | .254 | 90.000 | .015 | 30.175 | .127 | 30.175 | .127 | | | |
| W210PPB9 | 2 | 1.9448 | .0070 | 3.5433 | .0006 | .9055 | .0050 | 1.4382 | .0050 | 7,880 | 4,650 | 1.91 |
| | | 49.400 | .178 | 90.000 | .015 | 23.000 | .127 | 36.530 | .127 | | | |
| W211PP2 | 5 | 2.1880 | .0006 | 3.9370 | .0006 | 1.3120 | .0060 | 1.3120 | .0060 | 9,740 | 5,850 | 2.33 |
| | | 55.575 | .015 | 100.000 | .015 | 33.325 | .152 | 33.325 | .152 | | | |
| W211PPB2 | 3 | 2.1880 | .0006 | 3.9370 | .0006 | 1.3120 | .0060 | 1.3120 | .0060 | 9,740 | 5,850 | 3.00 |
| | | 55.575 | .015 | 100.000 | .015 | 33.325 | .152 | 33.325 | .152 | | | |
| W211PPB4 | 6 | 2.1880 | .0006 | 3.9370 | .0006 | 1.3120 | .0060 | 2.1870 | .0060 | 9,740 | 5,850 | 3.63 |
| | | 55.575 | .015 | 100.000 | .015 | 33.325 | .152 | 55.500 | .152 | | | |
| W214PP2 | 5 | 2.7559 | .0006 | 4.9213 | .0008 | 1.5620 | .0060 | 1.5620 | .0060 | 14,000 | 8,800 | 4.19 |
| | | 70.000 | .015 | 125.000 | .020 | 39.675 | .152 | 39.675 | .152 | | | |
| W214PPB2 | 3 | 2.7559 | .0006 | 4.9213 | .0008 | 1.5620 | .0060 | 1.5620 | .0060 | 14,000 | 8,800 | 3.96 |
| | | 70.000 | .015 | 125.000 | .020 | 39.675 | .152 | 39.675 | .152 | | | |
| W214PPB9 | 3 | 2.7660 | .0010 | 4.9213 | .0008 | 1.1020 | .0060 | 1.7500 | .0060 | 14,000 | 8,800 | 3.96 |
| | | 70.256 | .025 | 125.000 | .020 | 28.000 | .152 | 44.450 | .152 | | | |



ROUND BORE RELUBRICABLE

Heavy Duty Disc Harrow Bearings are made with triple lip seals to protect from corrosive environments. This seal is a one piece shroud cover with three molded contact seals. Standard relubrication feature is a drilled hole in groove.


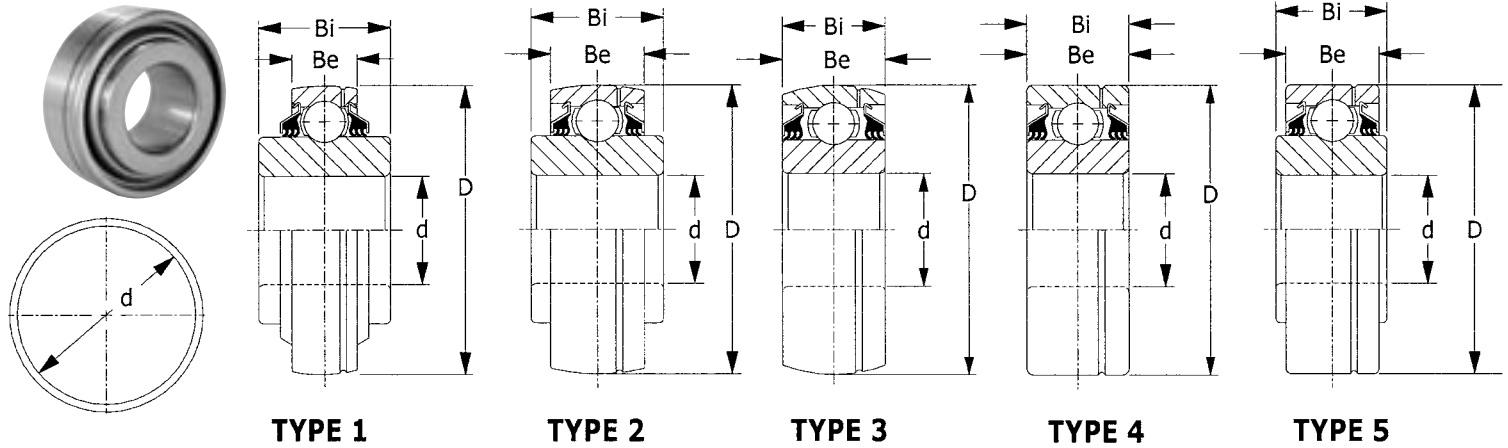


| PEER UNIT NUMBER | TYPE | d | | D | | Be | | Bi | | Load Ratings | | Wt. Lbs. |
|------------------|------|---------|------------------------------|---------|------------------------------|---------|------------------------------|---------|------------------------------|--------------|--------|----------|
| | | nominal | TOL.+0/ to minus shown | nominal | TOL.+0/ to minus shown | nominal | TOL.+0/ to minus shown | nominal | TOL.+0/ to minus shown | Dynamic | Static | |
| GW209PPB2 | 3 | 1.7717 | .0005 | 3.3465 | .0006 | 1.1880 | .0050 | 1.1880 | .0050 | 7,350 | 4,150 | 1.44 |
| | | 45.000 | .013 | 85.000 | .015 | 30.175 | .127 | 30.175 | .127 | | | |
| GW209PPB4 | 3 | 1.5350 | .0100 | 3.3465 | .0006 | 1.1880 | .0050 | 1.1880 | .0050 | 7,350 | 4,150 | 1.65 |
| | | 39.000 | .254 | 85.000 | .015 | 30.175 | .127 | 30.175 | .127 | | | |
| GW209PPB11 | 1 | 1.7810 | .0100 | 3.3465 | .0006 | .8660 | .0050 | 1.4380 | .0050 | 7,350 | 4,150 | 1.37 |
| | | 45.237 | .254 | 85.000 | .015 | 22.000 | .127 | 36.525 | .127 | | | |
| GW210PPB2 | 3 | 1.9380 | .0005 | 3.5433 | .0006 | 1.1880 | .0050 | 1.1880 | .0050 | 7,880 | 4,650 | 1.50 |
| | | 49.225 | .013 | 90.000 | .015 | 30.175 | .127 | 30.175 | .127 | | | |
| GW210PPB5 | 3 | 1.7850 | .0100 | 3.5433 | .0006 | 1.1880 | .0050 | 1.1880 | .0050 | 7,880 | 4,650 | 1.8 |
| | | 45.339 | .254 | 90.000 | .015 | 30.175 | .127 | 30.175 | .127 | | | |
| GW210PP9 | 5 | 1.9450 | .0070 | 3.5433 | .0006 | .9060 | .0050 | 1.4380 | .0050 | 7,880 | 4,650 | 1.75 |
| | | 49.403 | .178 | 90.000 | .015 | 23.000 | .127 | 36.525 | .127 | | | |
| GW211PP2 | 4 | 2.1880 | .0006 | 3.9370 | .0006 | 1.3120 | .0060 | 1.3120 | .0060 | 9,740 | 5,850 | 3.00 |
| | | 55.575 | .015 | 100.000 | .015 | 33.325 | .152 | 33.325 | .152 | | | |
| GW211PPB2 | 3 | 2.1880 | .0006 | 3.9370 | .0006 | 1.3120 | .0060 | 1.3120 | .0060 | 9,740 | 5,850 | 2.62 |
| | | 55.575 | .015 | 100.000 | .015 | 33.325 | .152 | 33.325 | .152 | | | |
| GW211PPB8 | 1 | 2.1880 | .0006 | 3.9370 | .0006 | .9840 | .0060 | 1.3120 | .0060 | 9,740 | 5,850 | 1.85 |
| | | 55.575 | .015 | 100.000 | .015 | 25.000 | .152 | 33.325 | .152 | | | |
| GW211PPB9 | 1 | 2.1950 | .0070 | 3.9370 | .0006 | .9840 | .0060 | 1.5620 | .0060 | 9,740 | 5,850 | 2.02 |
| | | 55.753 | .178 | 100.000 | .015 | 25.000 | .152 | 39.675 | .152 | | | |
| GW211PPB10 | 3 | 1.9380 | .0006 | 3.9370 | .0006 | 1.3120 | .0060 | 1.3120 | .0060 | 9,740 | 5,850 | 2.26 |
| | | 49.225 | .015 | 100.000 | .015 | 33.325 | .152 | 33.325 | .152 | | | |
| GW211PPB13 | 1 | 1.7850 | .0100 | 3.9370 | .0006 | .9840 | .0060 | 1.3120 | .0060 | 9,740 | 5,850 | 2.02 |
| | | 45.339 | .254 | 100.000 | .015 | 25.000 | .152 | 33.325 | .152 | | | |
| GW211PPB14 | 1 | 2.0150 | .0100 | 3.9370 | .0006 | .9840 | .0060 | 1.3120 | .0060 | 9,740 | 5,850 | 2.00 |
| | | 51.181 | .254 | 100.000 | .015 | 25.000 | .152 | 33.325 | .152 | | | |
| GW211PP25 | 5 | 1.7800 | .0050 | 3.9370 | .0006 | 1.3120 | .0060 | 1.7500 | .0060 | 9,740 | 5,850 | 2.44 |
| | | 45.212 | .127 | 100.000 | .015 | 33.325 | .152 | 44.450 | .152 | | | |
| GW214PP2 | 4 | 2.7559 | .0006 | 4.9213 | .0008 | 1.5620 | .0060 | 1.5620 | .0060 | 14,000 | 8,800 | 4.19 |
| | | 70.000 | .015 | 125.000 | .020 | 39.675 | .152 | 39.675 | .152 | | | |
| GW214PPB2 | 3 | 2.7559 | .0006 | 4.9213 | .0008 | 1.5620 | .0060 | 1.5620 | .0060 | 14,000 | 8,800 | 3.96 |
| | | 70.000 | .015 | 125.000 | .020 | 39.675 | .152 | 39.675 | .152 | | | |
| GW214PPB3 | 3 | 1.9380 | .0006 | 4.9213 | .0008 | 1.5620 | .0060 | 1.5620 | .0060 | 14,000 | 8,800 | 4.24 |
| | | 49.225 | .015 | 125.000 | .020 | 39.675 | .152 | 39.675 | .152 | | | |
| GW214PPB5 | 2 | 2.7559 | .0006 | 4.9213 | .0008 | 1.5620 | .0060 | 2.4380 | .0060 | 14,000 | 8,800 | 4.75 |
| | | 70.000 | .015 | 125.000 | .020 | 39.675 | .152 | 61.925 | .152 | | | |
| GW214PPB6 | 1 | 2.6881 | .0006 | 4.9213 | .0008 | 1.1024 | .0060 | 2.6875 | .0060 | 14,000 | 8,800 | 5.14 |
| | | 68.278 | .015 | 125.000 | .020 | 28.000 | .152 | 68.263 | .152 | | | |

SQUARE BORE NON-RELUBRICABLE



Heavy Duty Disc Harrow Bearings are made with triple lip seals to protect from corrosive environments. This seal is a one piece shroud cover with three molded contact seals. This series is lubricated for life.

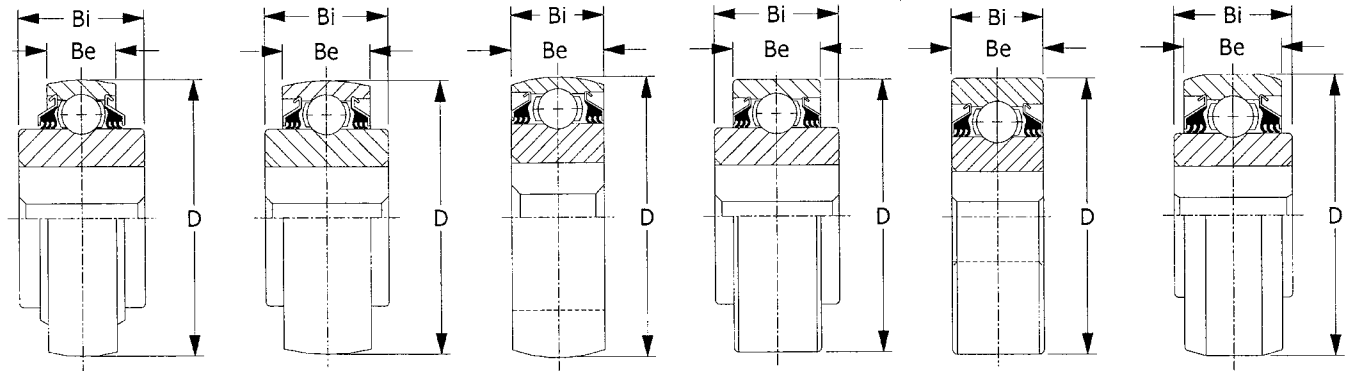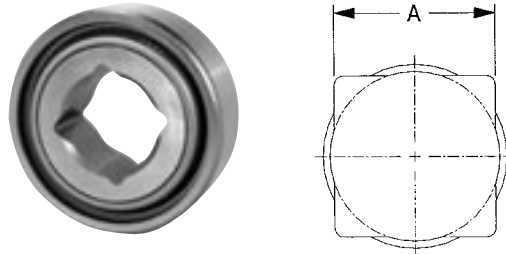

TYPE 1

TYPE 2

TYPE 3

TYPE 4

TYPE 5



TYPE 6

| PEER UNIT NUMBER | TYPE | Shaft Size | A | | D | | TOL.+0/ to minus shown | Be nominal | Bi nominal | Be & Bi TOL. +0/ to minus | Load Ratings | | Wt. Lbs. |
|------------------|------|------------|---------|-------|---------|-------|------------------------|------------|------------|---------------------------|--------------|--------|----------|
| | | | nominal | Tol. | nominal | | | | | | Dynamic | Static | |
| W208PP5 | 4 | 1 1/8 | 1.1800 | ±.005 | 3.1496 | .0005 | .7090 | 1.4380 | .0050 | 7,340 | 3,650 | 1.50 | |
| | | 28.575 | 29.970 | .127 | 80.000 | .013 | 18.000 | 36.520 | .127 | | | | |
| W208PPB5 | 1 | 1 1/8 | 1.1800 | ±.005 | 3.1496 | .0005 | .7090 | 1.4380 | .0050 | 7,340 | 3,650 | 1.47 | |
| | | 28.575 | 29.970 | .127 | 80.000 | .013 | 18.000 | 36.520 | .127 | | | | |
| W208PP6 | 4 | 1 | 1.0300 | ±.005 | 3.1496 | .0005 | .7090 | 1.4380 | .0050 | 7,340 | 3,650 | 1.62 | |
| | | 25.400 | 26.162 | .127 | 80.000 | .013 | 18.000 | 36.520 | .127 | | | | |
| W208PPB6 | 1 | 1 | 1.0300 | ±.005 | 3.1496 | .0005 | .7090 | 1.4380 | .0050 | 7,340 | 3,650 | 1.59 | |
| | | 25.400 | 26.162 | .127 | 80.000 | .013 | 18.000 | 36.520 | .127 | | | | |
| W208PP8 | 4 | 1 1/8 | 1.1800 | ±.005 | 3.1496 | .0005 | 1.1880 | 1.4380 | .0050 | 7,340 | 3,650 | 1.66 | |
| | | 28.575 | 29.972 | .127 | 80.000 | .013 | 30.175 | 36.520 | .127 | | | | |
| W208PPB8 | 2 | 1 1/8 | 1.1800 | ±.005 | 3.1496 | .0005 | 1.1880 | 1.4380 | .0050 | 7,340 | 3,650 | 1.66 | |
| | | 28.575 | 29.972 | .127 | 80.000 | .013 | 30.175 | 36.520 | .127 | | | | |
| W208PPB9 | 2 | 1 | 1.0300 | ±.005 | 3.1496 | .0005 | 1.1880 | 1.4380 | .0050 | 7,340 | 3,650 | 1.74 | |
| | | 25.400 | 26.162 | .127 | 80.000 | .013 | 30.175 | 36.520 | .127 | | | | |
| W208PPB11 | 6 | 7/8 | .9050 | ±.005 | 3.3760 | .0005 | 1.1880 | 1.4380 | .0050 | 7,340 | 3,650 | 2.05 | |
| | | 22.225 | 23.000 | .127 | 85.750 | .013 | 30.175 | 36.520 | .127 | | | | |
| W208PPB12 | 6 | 1 1/8 | 1.1800 | ±.005 | 3.3760 | .0005 | 1.1880 | 1.4380 | .0050 | 7,340 | 3,650 | 1.62 | |
| | | 28.575 | 29.972 | .127 | 85.750 | .013 | 30.175 | 36.520 | .127 | | | | |
| W208PPB13 | 1 | 7/8 | .9050 | ±.005 | 3.1496 | .0005 | .7090 | 1.4380 | .0050 | 7,340 | 3,650 | 1.62 | |
| | | 22.225 | 23.000 | .127 | 80.000 | .013 | 18.000 | 36.520 | .127 | | | | |
| W209PPB5 | 2 | 1 1/4 | 1.2900 | ±.005 | 3.3465 | .0005 | 1.1880 | 1.4380 | .0050 | 7,350 | 4,150 | 1.75 | |
| | | 31.750 | 32.766 | .127 | 85.000 | .013 | 30.175 | 36.520 | .127 | | | | |
| W209PPB7 | 6 | 1 1/4 | 1.2900 | ±.005 | 3.3760 | .0005 | 1.1880 | 1.4375 | .0050 | 7,350 | 4,150 | 1.80 | |
| | | 31.750 | 32.766 | .127 | 85.750 | .013 | 30.175 | 36.510 | .127 | | | | |
| W210PP4 | 5 | 1 1/8 | 1.1800 | ±.005 | 3.5433 | .0005 | 1.1880 | 1.1880 | .0050 | 7,880 | 4,650 | 1.92 | |
| | | 28.575 | 29.972 | .127 | 90.000 | .013 | 30.175 | 30.150 | .127 | | | | |
| W210PPB4 | 3 | 1 1/8 | 1.1800 | ±.005 | 3.5433 | .0005 | 1.1880 | 1.1880 | .0050 | 7,880 | 4,650 | 2.11 | |
| | | 28.575 | 29.972 | .127 | 90.000 | .013 | 30.175 | 30.175 | .127 | | | | |
| W210PPB6 | 2 | 1 1/8 | 1.1800 | ±.005 | 3.5433 | .0005 | 1.1880 | 1.4380 | .0050 | 7,880 | 4,650 | 2.11 | |
| | | 28.575 | 29.972 | .127 | 90.000 | .013 | 30.175 | 36.520 | .127 | | | | |
| W211PP3 | 5 | 1 1/2 | 1.5311 | ±.005 | 3.9370 | .0006 | 1.3120 | 1.3120 | .0060 | 9,740 | 5,850 | 2.79 | |
| | | 38.100 | 38.890 | .127 | 100.00 | .015 | 33.324 | 33.324 | .152 | | | | |
| W211PPB3 | 3 | 1 1/2 | 1.5311 | ±.005 | 3.9370 | .0006 | 1.3120 | 1.3120 | .0060 | 9,740 | 5,850 | 2.66 | |
| | | 38.100 | 38.890 | .127 | 100.00 | .015 | 33.324 | 33.324 | .152 | | | | |
| W211PP5 | 4 | 1 1/2 | 1.5311 | ±.005 | 4.0000 | .0006 | 1.4380 | 1.7500 | .0060 | 9,740 | 5,850 | 3.38 | |
| | | 38.100 | 38.890 | .127 | 101.600 | .015 | 36.520 | 44.450 | .152 | | | | |
| W211PPB6 | 6 | 1 1/2 | 1.5311 | ±.005 | 4.0770 | .0006 | 1.4380 | 1.7500 | .0060 | 9,740 | 5,850 | 4.05 | |
| | | 38.100 | 38.890 | .127 | 103.556 | .015 | 36.520 | 44.450 | .152 | | | | |



SQUARE BORE RELUBRICABLE

Heavy Duty Disc Harrow Bearings are made with triple lip seals to protect from corrosive environments. This seal is a one piece shroud cover with three molded contact seals. Standard relubrication feature is a drilled hole in groove.

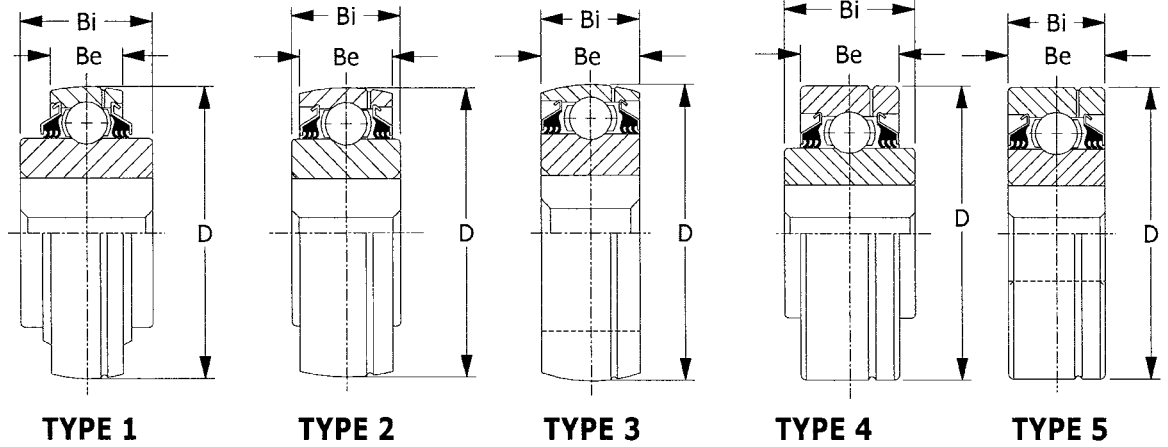
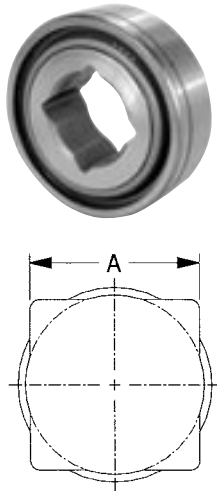


| PEER UNIT NUMBER | TYPE | Shaft Size | A nominal | Tol. | D | | Be nominal | Bi nominal | Be & Bi TOL. +0/to minus shown | Load Ratings | | Wt. Lbs. |
|------------------|------|------------|-----------|-------|---------|------------------------|------------|------------|--------------------------------|--------------|--------|----------|
| | | | | | nominal | TOL. +0/to minus shown | | | | Dynamic | Static | |
| GW208PPB5 | 1 | 1 1/8 | 1.1800 | ±.005 | 3.1496 | .0005 | .8270 | 1.4380 | .0050 | 7,340 | 3,650 | 1.47 |
| | | 28.575 | 29.972 | .127 | 80.000 | .013 | 21.000 | 36.525 | .127 | | | |
| GW208PPB6 | 1 | 1 | 1.0300 | ±.005 | 3.1496 | .0005 | .8270 | 1.4380 | .0050 | 7,340 | 3,650 | 1.75 |
| | | 25.400 | 26.162 | .127 | 80.000 | .013 | 21.000 | 36.525 | .127 | | | |
| GW208PPB8 | 2 | 1 1/8 | 1.1800 | ±.005 | 3.1496 | .0005 | 1.1880 | 1.4380 | .0050 | 7,340 | 3,650 | 1.75 |
| | | 28.575 | 29.972 | .127 | 80.000 | .013 | 30.175 | 36.525 | .127 | | | |
| GW208PP17 | 4 | 1 1/8 | 1.1800 | ±.005 | 3.3755 | .0005 | 1.1880 | 1.4380 | .0500 | 7,340 | 3,650 | 2.04 |
| | | 28.575 | 29.972 | .127 | 85.738 | .013 | 30.175 | 36.525 | .127 | | | |
| GW208PPB17 | 2 | 1 1/8 | 1.1800 | ±.005 | 3.3755 | .0005 | 1.1880 | 1.4380 | .0050 | 7,340 | 3,650 | 2.04 |
| | | 28.575 | 29.972 | .127 | 85.738 | .013 | 30.175 | 36.525 | .127 | | | |
| GW209PPB5 | 2 | 1 1/4 | 1.2900 | ±.005 | 3.3465 | .0006 | 1.1880 | 1.4380 | .0050 | 7,350 | 4,150 | 1.75 |
| | | 31.750 | 32.776 | .127 | 85.000 | .015 | 30.175 | 36.525 | .127 | | | |
| GW209PPB8 | 1 | 1 1/4 | 1.2900 | ±.005 | 3.3465 | .0006 | .8660 | 1.4380 | .0050 | 7,350 | 4,150 | 1.65 |
| | | 31.750 | 32.776 | .127 | 85.000 | .015 | 22.000 | 36.525 | .127 | | | |
| GW210PP4 | 5 | 1 1/8 | 1.1800 | ±.005 | 3.5433 | .0006 | 1.1880 | 1.1880 | .0050 | 7,880 | 4,650 | 2.31 |
| | | 28.575 | 29.972 | .127 | 90.000 | .015 | 30.175 | 30.175 | .127 | | | |
| GW210PPB4 | 3 | 1 1/8 | 1.1800 | ±.005 | 3.5433 | .0006 | 1.1880 | 1.1880 | .0050 | 7,880 | 4,650 | 1.75 |
| | | 28.575 | 29.972 | .127 | 90.000 | .015 | 30.175 | 30.175 | .127 | | | |
| GW211PP3 | 5 | 1 1/2 | 1.5311 | ±.005 | 3.9370 | .0006 | 1.3120 | 1.3120 | .0060 | 9,740 | 5,850 | 2.79 |
| | | 38.100 | 39.890 | .127 | 100.000 | .015 | 33.325 | 33.325 | .152 | | | |
| GW211PPB3 | 3 | 1 1/2 | 1.5311 | ±.005 | 3.9370 | .0006 | 1.3120 | 1.3120 | .0060 | 9,740 | 5,850 | 2.66 |
| | | 38.100 | 38.890 | .127 | 100.000 | .015 | 33.325 | 33.325 | .152 | | | |
| GW211PP5 | 4 | 1 1/2 | 1.5311 | ±.005 | 4.0000 | .0006 | 1.4380 | 1.7500 | .0060 | 9,740 | 5,850 | 2.69 |
| | | 38.100 | 38.890 | .127 | 101.600 | .015 | 36.525 | 44.450 | .152 | | | |
| GW211PP17 | 4 | 1 1/2 | 1.5311 | ±.005 | 3.9370 | .0006 | 1.3120 | 1.7500 | .0060 | 9,740 | 5,850 | 2.62 |
| | | 38.100 | 38.890 | .127 | 100.000 | .015 | 33.325 | 44.450 | .152 | | | |
| GW211PPB17 | 1 | 1 1/2 | 1.5311 | ±.005 | 3.9370 | .0006 | 1.3120 | 1.7500 | .0060 | 9,740 | 5,850 | 2.55 |
| | | 38.100 | 38.890 | .127 | 100.000 | .015 | 33.325 | 44.450 | .152 | | | |
| GW214PPB4 | 3 | 2 | 2.0551 | ±.005 | 4.9213 | .0008 | 1.5620 | 1.5620 | .0060 | 14,000 | 8,800 | 4.75 |
| | | 50.800 | 52.200 | .127 | 125.000 | .020 | 39.675 | 39.675 | .152 | | | |
| GW216PP2 | 4 | 2 1/4 | 2.3150 | ±.005 | 5.5118 | .0008 | 1.1810 | 2.5000 | .0060 | 16,280 | 10,400 | 6.32 |
| | | 57.150 | 58.800 | .127 | 140.000 | .020 | 30.000 | 63.500 | .152 | | | |


HEX BORE SERIES




This series features a hex bore. Used in applications where collars, set screws, or any other locking devices are not required. This series incorporates PEER'S TRASH SEAL, a close fitting metal shield backed by a molded rubber seal. Also available relubricable-prefix "G".




TYPE 1



TYPE 2



TYPE 3





TYPE 4

| PEER UNIT NUMBER | TYPE | Hex Shaft Size | A nominal | "B" & "A" TOL. - 0/ to plus | D nominal | D TOL. +0/ to minus shown | Be nominal | Bi nominal | Be & Bi TOL. +0/ to minus shown | Load Ratings | | Wt. Lbs. |
|------------------|------|----------------|------------------|-----------------------------|-------------------|---------------------------|------------------|------------------|---------------------------------|--------------|--------|----------|
| | | | | | | | | | | Dynamic | Static | |
| 202KRR3 | 1 | 9/16" | .5630 14.300 | .0050 .127 | 1.3780 35.000 | .0005 .013 | .4330 11.000 | .5120 13.000 | .0050 .127 | 2,160 | 1,000 | .12 |
| 204KPP2 | 3 | 11/16" | .6950 17.653 | .0050 .127 | 1.8504 47.000 | .0005 .013 | .5510 14.000 | .8250 20.955 | .0050 .127 | 2,900 | 1,000 | .34 |
| 204KRR2 | 1 | 11/16" | .6950 17.653 | .0050 .127 | 1.8504 47.000 | .0005 .013 | .5510 14.000 | .8250 20.955 | .0050 .127 | 2,900 | 1,410 | .32 |
| 204KRRB2 | 2 | 11/16" | .6950 17.653 | .0050 .127 | 1.8504 47.000 | .0005 .013 | .5510 14.000 | .8250 20.955 | .0050 .127 | 2,900 | 1,410 | .32 |
| 205KPP2 | 3 | 7/8" | .8760 22.250 | .0050 .127 | 2.0472 52.000 | .0005 .013 | .5910 15.000 | 1.0000 25.400 | .0050 .127 | 3,150 | 1,610 | .47 |
| 205KRR2 | 1 | 7/8" | .8760 22.250 | .0050 .127 | 2.0472 52.000 | .0005 .013 | .5910 15.000 | 1.0000 25.400 | .0050 .127 | 3,150 | 1,610 | .44 |
| 205KPPB2 | 4 | 7/8" | .8760 22.250 | .0050 .127 | 2.0472 52.000 | .0005 .013 | .5910 15.000 | 1.0000 25.400 | .0050 .127 | 3,150 | 1,610 | .47 |
| 205KRRB2 | 2 | 7/8" | .8760 22.250 | .0050 .127 | 2.0472 52.000 | .0005 .013 | .5910 15.000 | 1.0000 25.400 | .0050 .127 | 3,150 | 1,610 | .44 |
| 206KRR6 | 1 | 1" | 1.0010 25.425 | .0050 .127 | 2.4409 62.000 | .0005 .013 | .6300 16.000 | .9450 24.000 | .0050 .127 | 4,370 | 2,320 | .75 |
| 206KRRB6 | 2 | 1" | 1.0010 25.425 | .0050 .127 | 2.4409 62.000 | .0005 .013 | .6300 16.000 | .9450 24.000 | .0050 .127 | 4,370 | 2,320 | .75 |
| G207KPPB2* | 4 | 1 1/8" | 1.1260 28.600 | .0050 .127 | 2.8346 72.000 | .0005 .013 | .7480 19.000 | 1.4840 37.694 | .0050 .127 | 5,770 | 3,150 | 1.10 |
| 207KRRB9 | 2 | 1 1/8" | 1.1260 28.600 | .0050 .127 | 2.8346 72.000 | .0005 .013 | .6690 17.000 | 1.4840 37.694 | .0050 .127 | 5,770 | 3,150 | 1.00 |
| 207KRRB12 | 2 | 1 1/8" | 1.1260 28.600 | .0050 .127 | 2.8346 72.000 | .0005 .013 | .6690 17.000 | .9840 25.000 | .0050 .127 | 5,770 | 3,150 | .87 |
| GW208PPB22* | 4 | 1 1/4" | 1.2510 31.877 | .0050 .127 | 3.1496 80.000 | .0005 .013 | .8270 21.000 | 1.4380 36.520 | .0050 .127 | 7,340 | 3,650 | 1.50 |
| W208KRRB6 | 2 | 1 3/8" | 1.3760 34.950 | .0050 .127 | 3.1496 80.000 | .0005 .013 | .8270 21.000 | 1.4380 1.438 | .0050 .127 | 7,340 | 3,650 | 1.31 |
| W208PPB16 | 4 | 1 1/4" | 1.2510 31.775 | .0050 .127 | 3.1496 80.000 | .0005 .013 | .7090 18.000 | 1.4380 36.520 | .0050 .127 | 7,340 | 3,650 | 1.45 |
| W208PP21 | 3 | 1 1/4" | 1.2510 31.775 | .0050 .127 | 3.1496 80.000 | .0005 .013 | .7090 18.000 | 1.4380 36.520 | .0050 .127 | 7,340 | 3,650 | 1.45 |
| G209KPPB2* | 4 | 1 1/2" | 1.5010 38.125 | .0050 .127 | 3.3465 85.000 | .0006 .015 | .7480 19.000 | 1.1810 30.000 | .0050 .127 | 7,350 | 4,150 | 1.26 |
| G5209KYYB2** | | 1 1/2" | 1.5010 38.125 | .0050 .127 | 3.3465 85.000 | .0006 .015 | 1.1811 30.000 | 1.2992 33.000 | .0050 .127 | 9,330 | 7,580 | 1.27 |
| 209KRRB2 | 2 | 1 1/2" | 1.5010 38.125 | .0050 .127 | 3.3465 85.000 | .0006 .015 | .7480 19.000 | 1.1810 30.000 | .0050 .127 | 7,350 | 4,150 | 1.27 |
| 210PPB20 | 3 | 1 1/4" | 1.2550 31.877 | .0050 .127 | 3.5433 90.000 | .0006 .015 | 0.8661 22.000 | 1.4350 36.450 | .0050 .127 | 9,070 | 5,675 | 2.00 |
| 210PP20 | 3 | 1 1/4" | 1.2550 31.877 | .0050 .127 | 3.5433 90.000 | .0006 .015 | 0.8661 22.000 | 1.435 36.450 | .0050 .127 | 9,070 | 5,675 | 2.05 |
| G210KPPB2* | 4 | 1 1/2" | 1.5010 38.125 | .0050 .127 | 3.5433 90.000 | 0.115 .013 | 0.8661 22.000 | 1.1811 30.000 | .0050 .127 | 7,780 | 4,650 | |
| GC211-32-NLC* | 3 | 1 3/4" | 1.7510 44.475 | .0050 .127 | 3.9370 100.000 | .0006 .015 | .9840 25.000 | 2.2500 57.150 | .0060 .152 | 9,740 | 5,850 | 3.35 |


*Relubricable

** Double row bearing with double lip shroud seals.


This series incorporates a standard Conrad type bearing with a special heavy contact seal. This allows use in heavily contaminated areas.

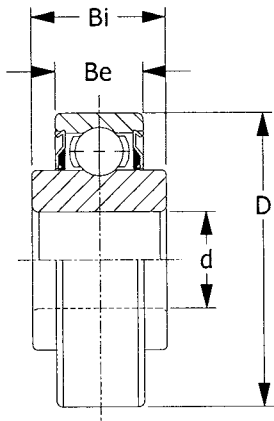


TYPE 1

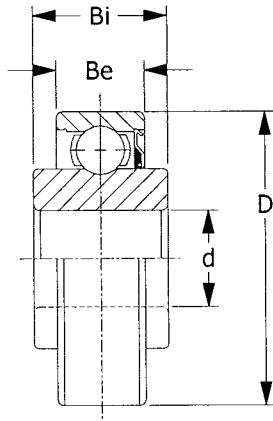

TYPE 2

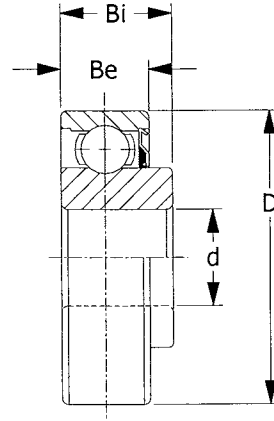

TYPE 3

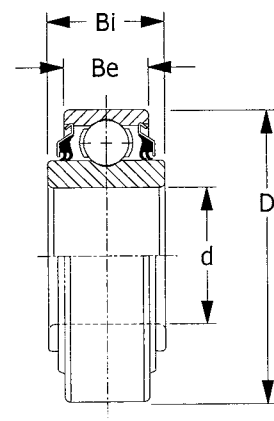


TYPE 4


| PEER UNIT NUMBER | TYPE | d | | D | | Bi | | Be | | Load Ratings | | Wt. Lbs. |
|------------------|------|---------|----------------------|---------|----------------------|---------|----------------------|---------|----------------------|--------------|--------|----------|
| | | nominal | TOL. +0/ to minus | nominal | TOL. +0/ to minus | nominal | TOL. +0/ to minus | nominal | TOL. +0/ to minus | Dynamic | Static | |
| 203KR2 | 3 | .6253 | .0003 | 1.5748 | .0005 | .5510 | .0050 | .4724 | .0050 | 2,160 | 889 | .18 |
| BB203KRR2* | 1 | 15.883 | .008 | 40.000 | .013 | 14.000 | .127 | 12.000 | .127 | 1,900 | 825 | .16 |
| | | 16.260 | .127 | 40.000 | .013 | 18.288 | .127 | 12.000 | .127 | | | |
| 203KRR2 | 1 | .6400 | .0050 | 1.5748 | .0005 | .7200 | .0050 | .4724 | .0050 | 2,160 | 889 | .16 |
| | | 16.260 | .127 | 40.000 | .013 | 18.288 | .127 | 12.000 | .127 | | | |
| BB203KRR2FD** | 4 | .6400 | .0050 | 1.5748 | .0005 | .7200 | .0050 | .4724 | .0050 | 1,900 | 825 | .17 |
| | | 16.260 | .127 | 40.000 | .013 | 18.288 | .127 | 12.000 | .127 | | | |
| 203KRR5 | 1 | .5150 | .0050 | 1.5748 | .0005 | .7200 | .0050 | .4724 | .0050 | 2,160 | 889 | .22 |
| | | 13.081 | .127 | 40.000 | .013 | 18.288 | .127 | 12.000 | .127 | | | |
| 203KRR7 | 1 | .6693 | .0003 | 1.5748 | .0005 | .6540 | .0050 | .4724 | .0050 | 2,160 | 889 | .18 |
| | | 17.000 | .008 | 40.000 | .013 | 16.612 | .127 | 12.000 | .127 | | | |
| 207KRR | 1 | 1.3780 | .0005 | 2.8346 | .0005 | .9840 | .0050 | .6690 | .0050 | 5,770 | 3,150 | .77 |
| | | 35.000 | .013 | 72.000 | .013 | 25.000 | .127 | 17.000 | .127 | | | |
| 208KRR2 | 1 | 1.5748 | .0005 | 3.1496 | .0005 | 1.0630 | .0050 | .8270 | .0050 | 7,340 | 3,650 | 1.04 |
| | | 40.000 | .013 | 80.000 | .013 | 27.000 | .127 | 21.000 | .127 | | | |

*BASIC 203KRR2 WITH GOTHIC ARCH RACEWAY.


**BASIC 203KRR2 WITH DOUBLE LIP SEALS AND GOTHIC ARCH RACEWAY.

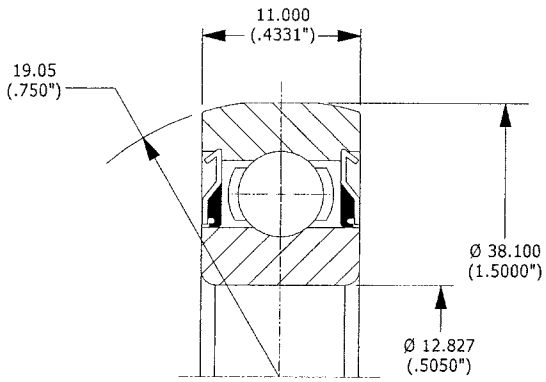


202NPP9

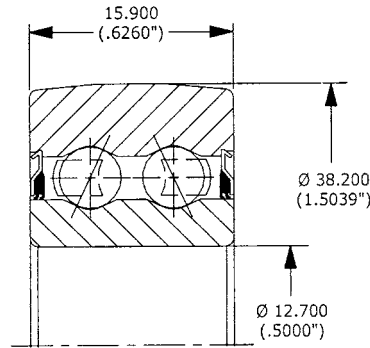


CF5202-2RST-8

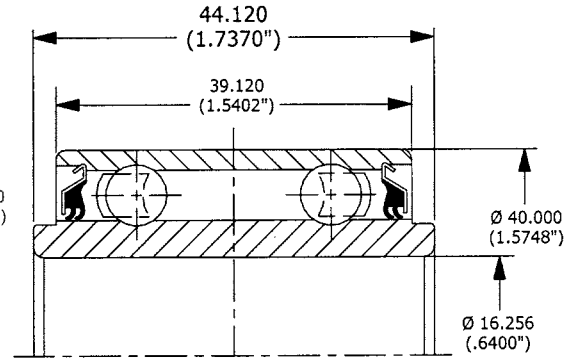


5203KYY2

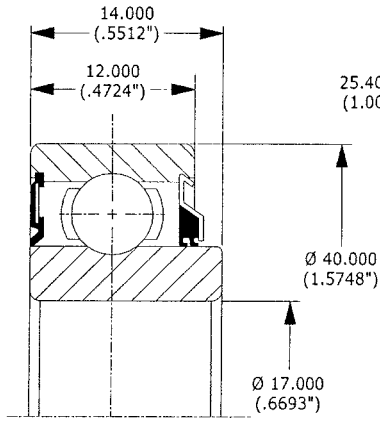


203JD

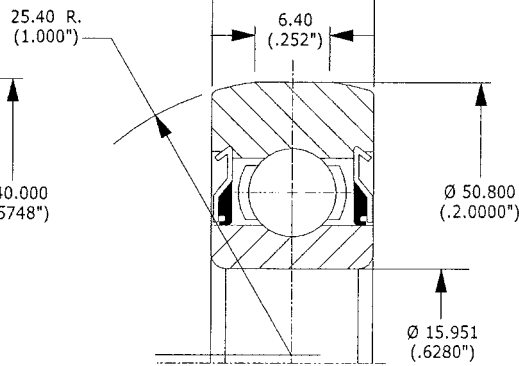


203KRR3

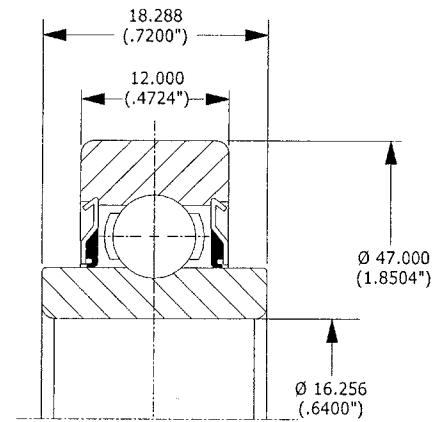


203KRR6

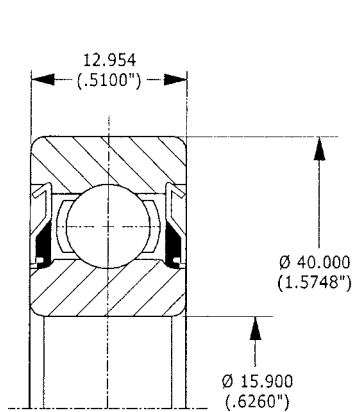


203NPP9

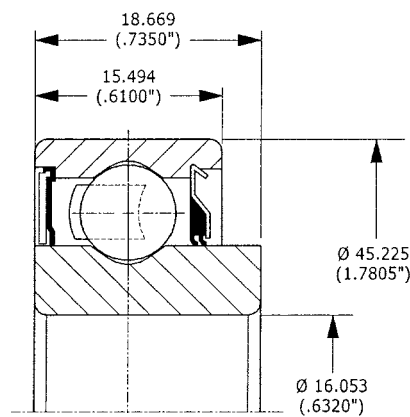


204JY3

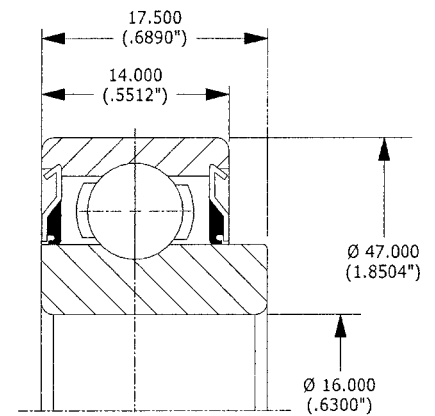


204KRD4

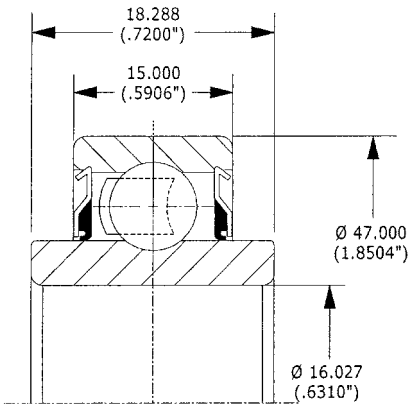


204KRR14

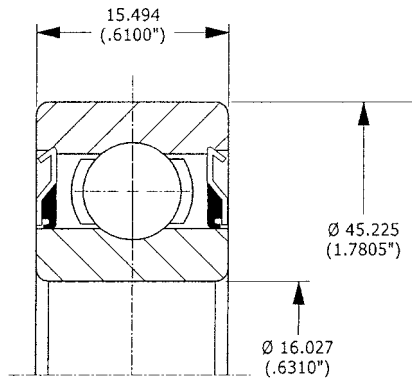


204RR8

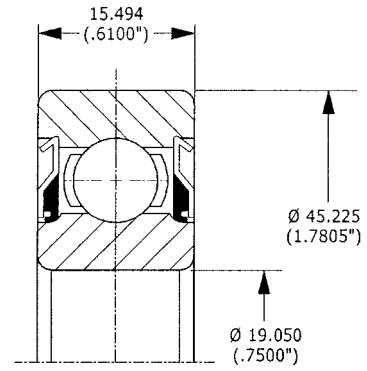


Z9504-2RST

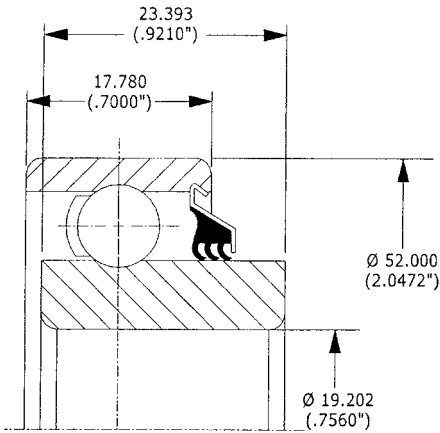


205KP6

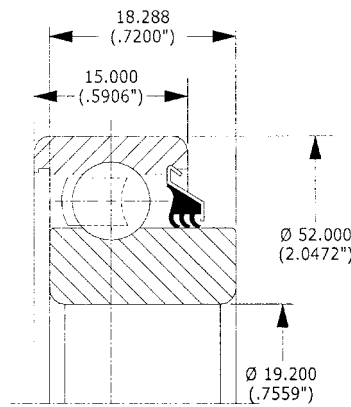


205KP8

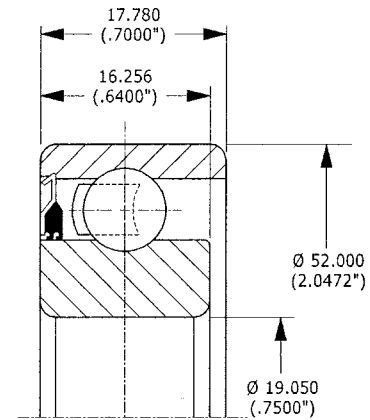


205KR3

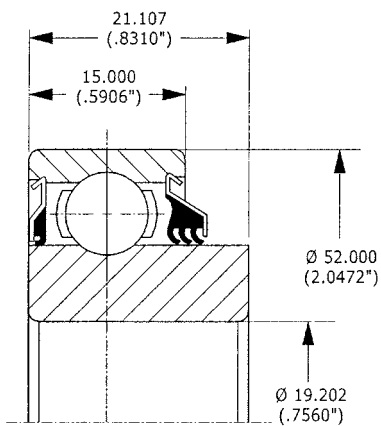




205KRP2

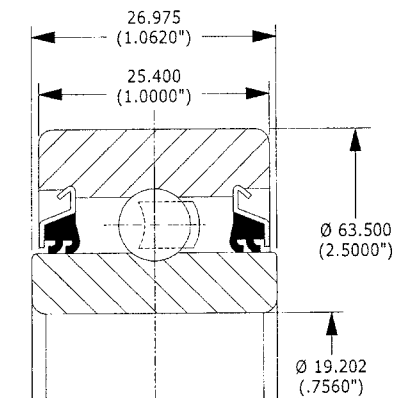


205KYY3

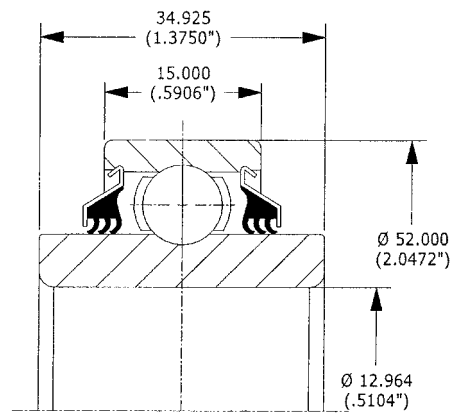


205PP8

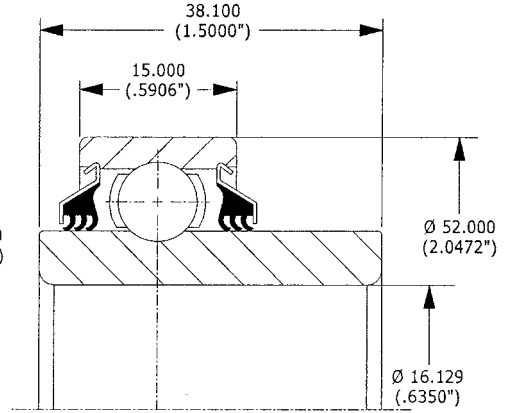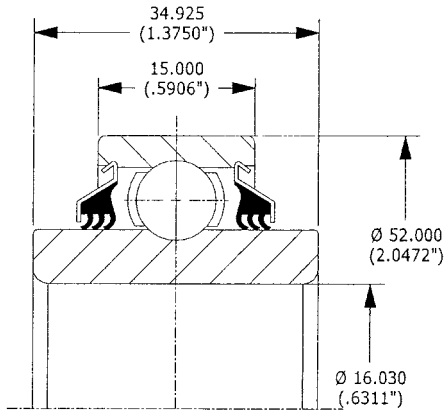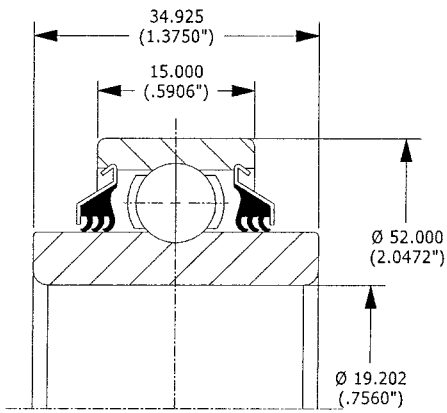


205PP9

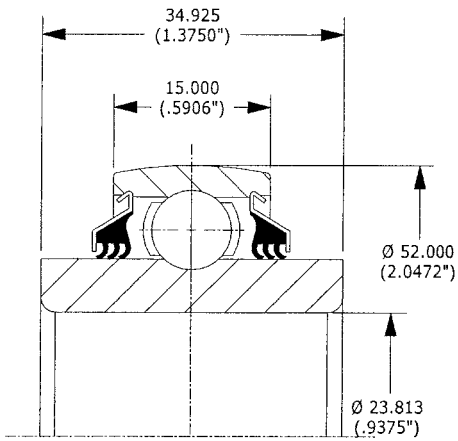


205PP10

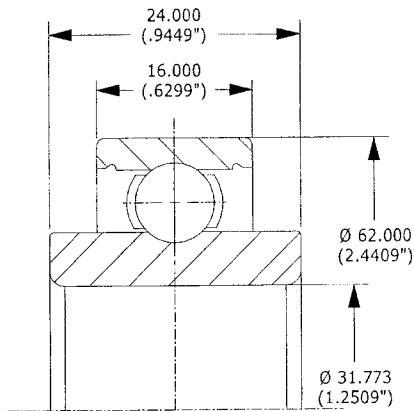


205PP12

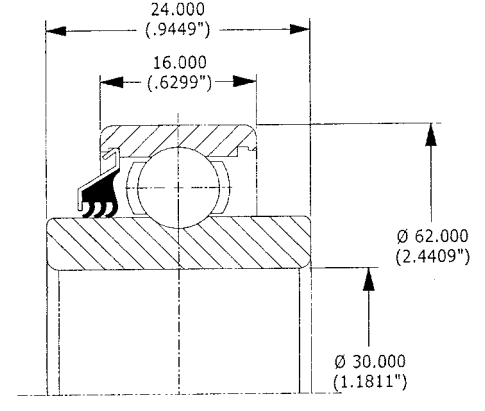


205PPB7

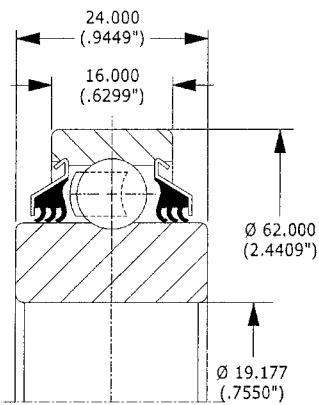

206K14

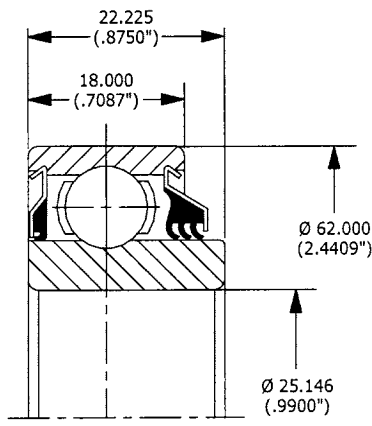




206KP2

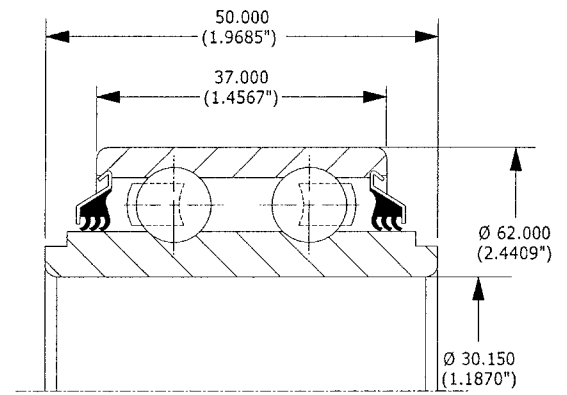

206KPP16

206KRP4




5206KPP3

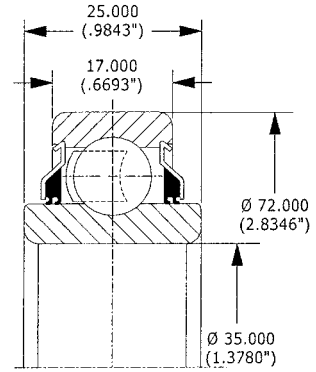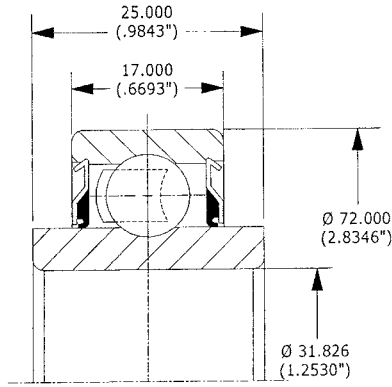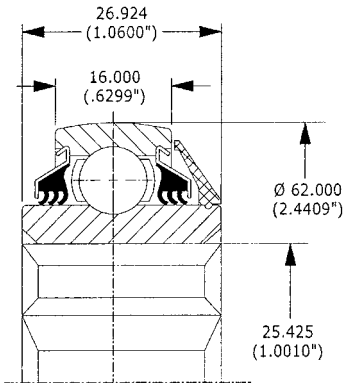

206KPPB5

207KRR14




207KYY

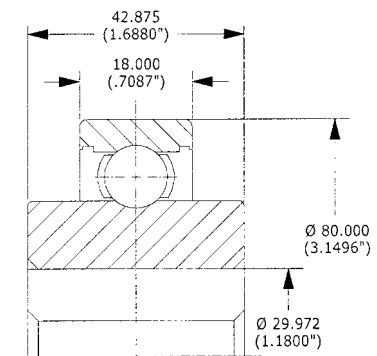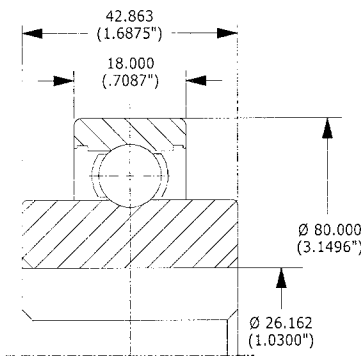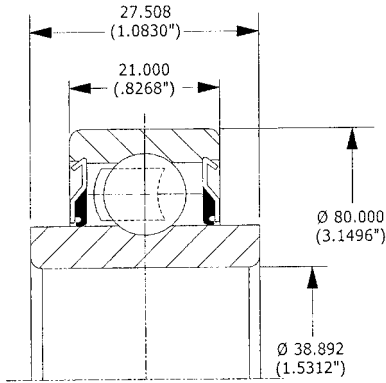

208KRR4

W208K2




W208K3

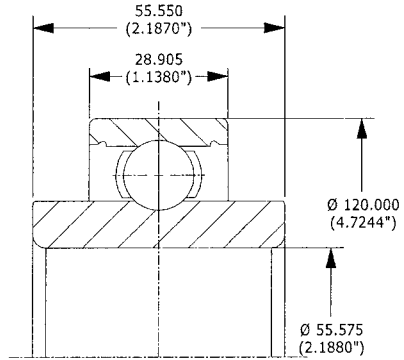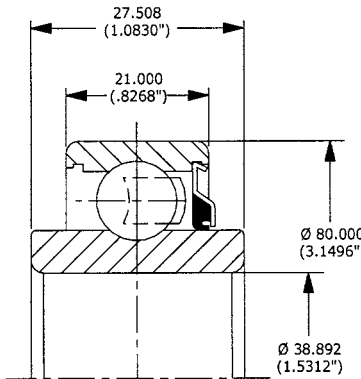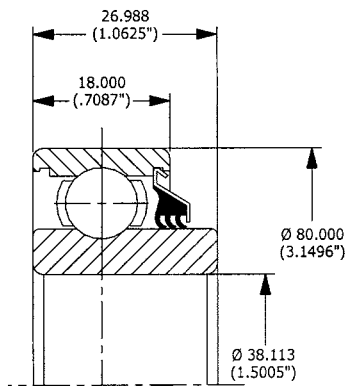


208KP2


208KR4

W213-8445

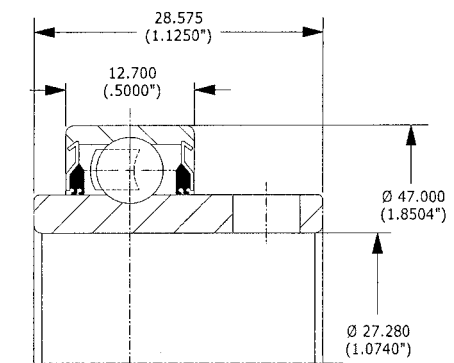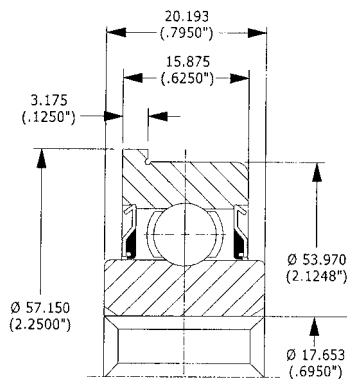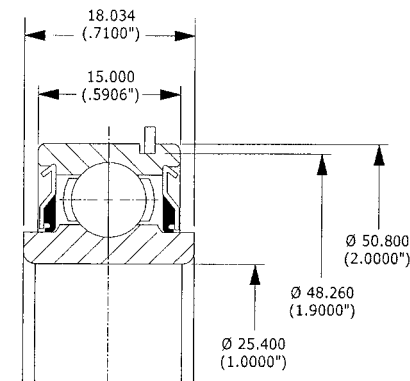


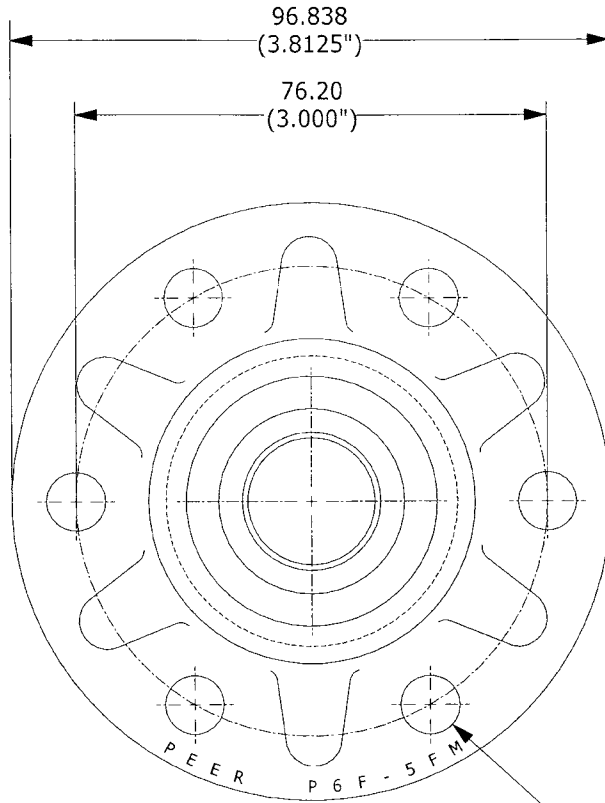


Six, $\varnothing 9.52$ (.375")
holes, equally spaced.

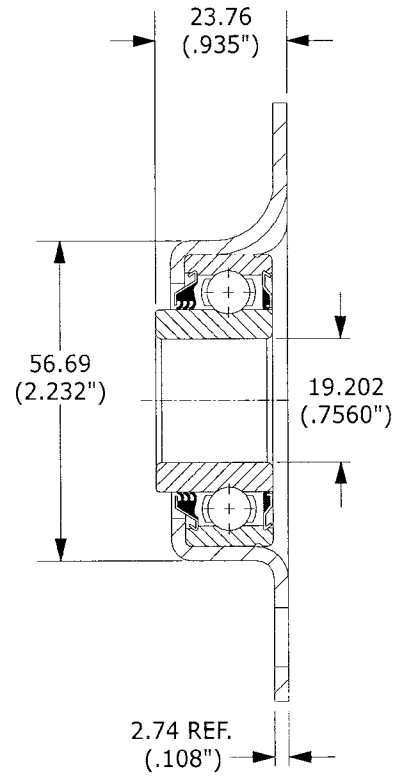


205KRP2-6PF

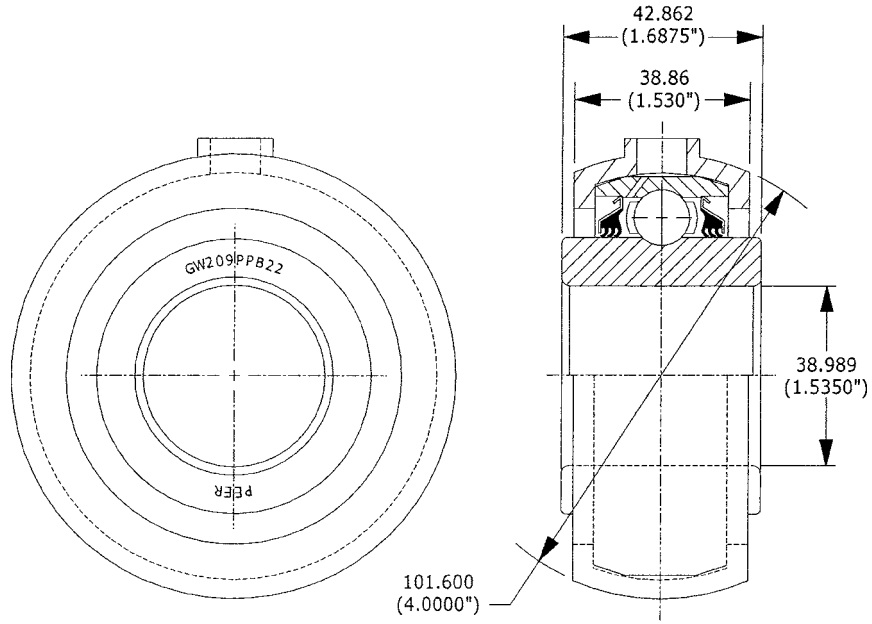


GW209PPB22-BR209RH

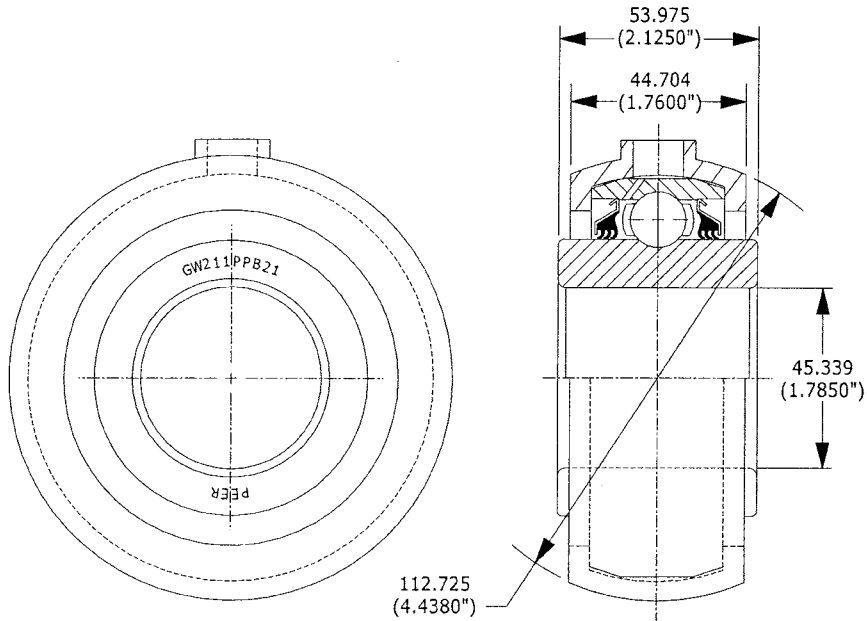

GW211PPB21-BR211RH

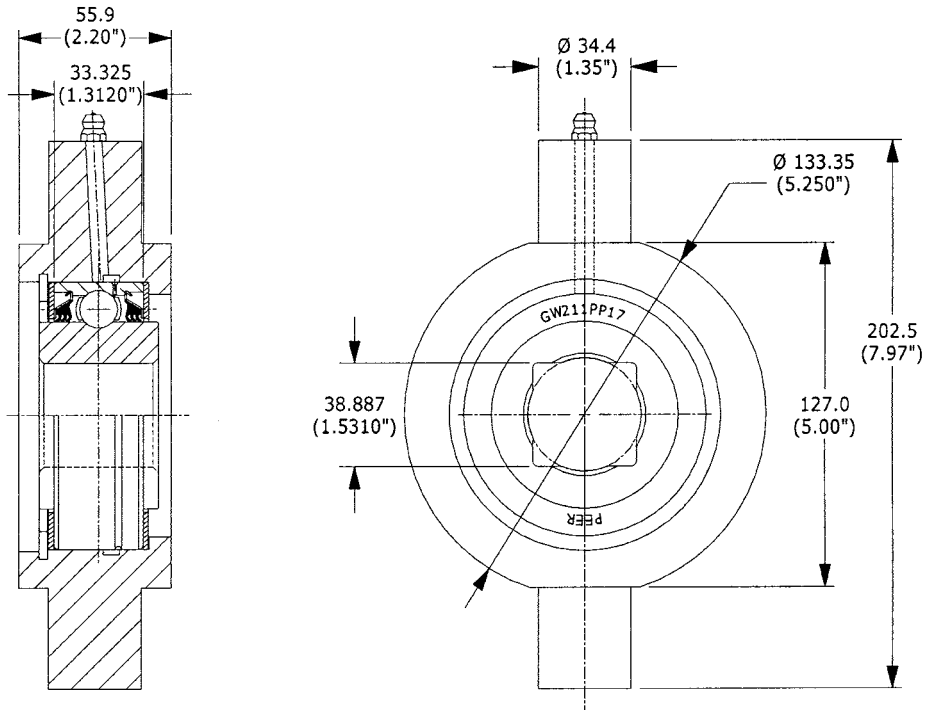

GW211PP17-HDT-211-H

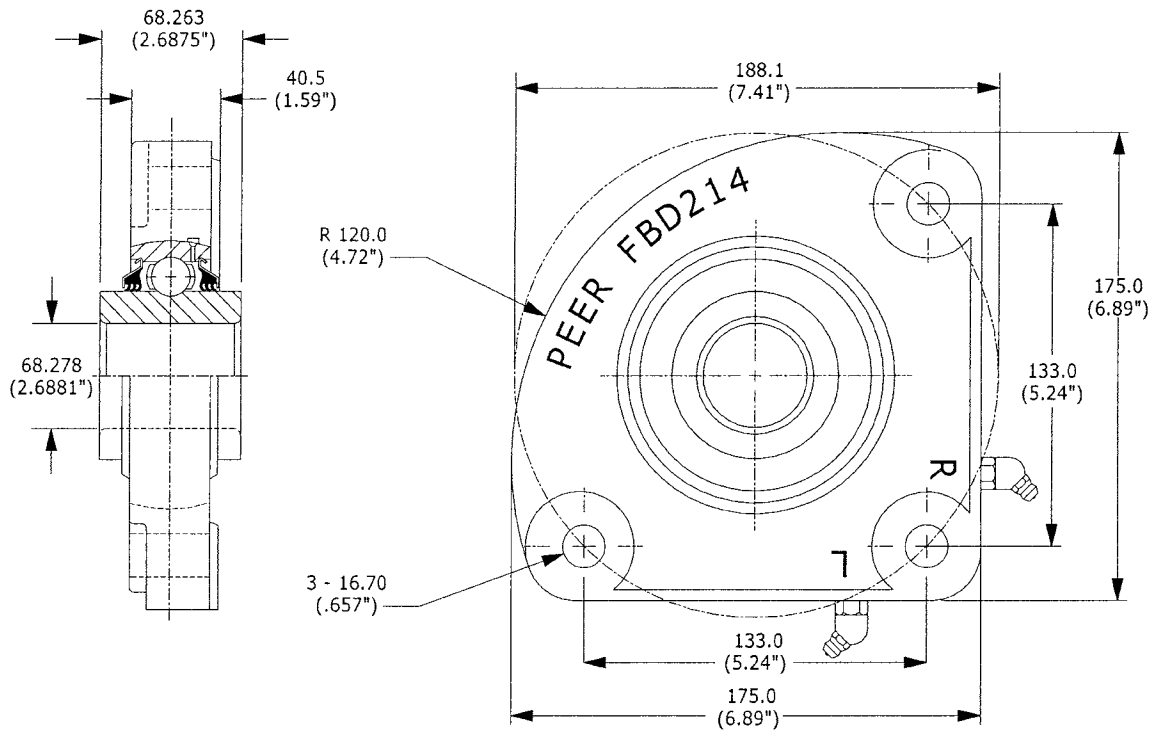

GW214PPB6-FBD

BASIC PEER AGRICULTURAL BALL BEARING CONSTRUCTION:

The basic components of a ball bearing are an inner ring, outer ring, balls and retainer (See Figure 1). Most PEER agricultural ball bearings also come sealed on both sides (See Figure 2 for available seal designs).

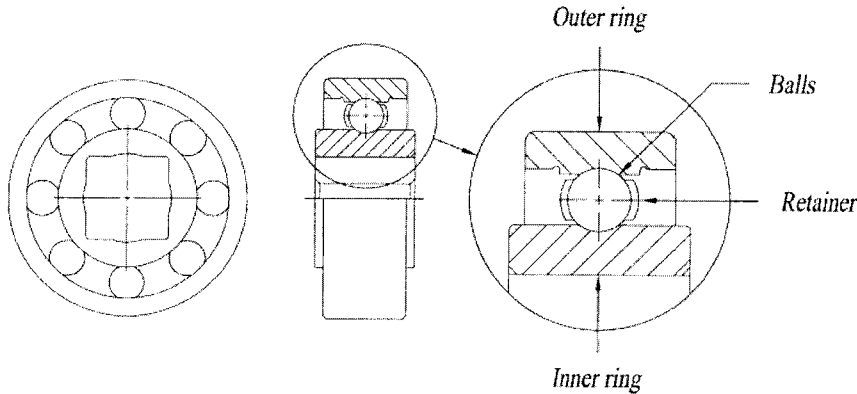


Figure 1: Basic PEER agricultural ball bearing components.
Shown: PEER square bore bearing.

BEARING COMPONENT MATERIALS:

| Component | Material |
|------------|--|
| Inner ring | SAE 52100 steel |
| Outer ring | SAE 52100 steel |
| Balls | SAE 52100 steel |
| Retainer | Two piece riveted mild steel |
| | One piece fiberglass reinforced nylon 66 |

Table 1: Bearing component materials.

SEALS:

Most PEER agricultural ball bearings are supplied with seals on both sides. PEER agricultural bearing seals feature one, two, or three Nitrile "Buna N" rubber lips bonded to a heavy gauge steel shroud. The shroud of the seal is staked into the outer ring for positive seal retention and protects the seal lips from abrasion, debris and fiber/crop wrap.

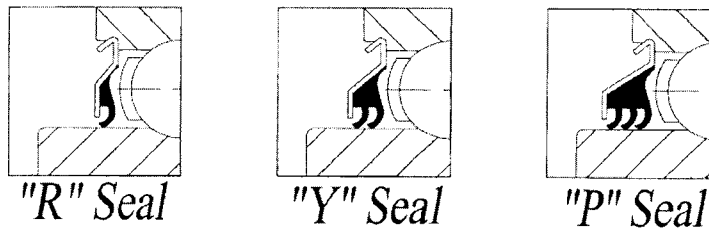


Figure 2: PEER agricultural ball bearing seal designs.

SEAL DESCRIPTIONS:

"R" Seal: Shroud seal featuring one, land riding, Nitrile "Buna N" rubber lip. This seal is designed for use in moderate contamination environments and higher speed agricultural applications.

"Y" Seal: Shroud seal featuring two, land riding, Nitrile "Buna N" rubber lips. This seal is designed for use in moderate to high contamination environments and moderate speed agricultural applications.

"P" Seal: Shroud seal featuring three, land riding, Nitrile "Buna N" rubber lips. This seal is designed for use in high to severe contamination environments and slow speed agricultural applications.

GREASE:

Grease is a popular form of lubrication used in ball bearings. Greases are composed primarily of three components, base oil, thickener and additives.

- Base oil:** Provides virtually all the lubrication function of the grease.
 - Mineral
 - Synthetic
- Thickener:** Acts as a sponge for the base oil.
 - Soap: lithium, calcium, sodium
 - Non-soap: polyurea, silica gel
- Additives:** Improves desired properties of a grease.
 - Rust inhibitors
 - Anti-oxidants

The consistency of a grease is described by its NLGI* number. The NLGI number of a particular grease is determined using a standard worked penetration test. Table 2 gives relative consistencies of ball bearing greases based on NLGI numbers.

| NLGI Number | Relative Consistency |
|-------------|----------------------|
| 1 | Very soft |
| 2 | Soft |
| 3 | Semi-firm |
| 4 | Firm |

Table 2: Relative grease consistency based on NLGI number.

*National Lubricating Grease Institute

PEER bearings are pre-lubricated with high quality grease suitable for a wide variety of applications, speeds, temperatures and environments. Special greases are readily available. Shown in Table 3 is a sample of the standard and special greases offered.

| Product Name | Shell Alvania RL #2 | Shell Alvania RL #3 | Mobil Polyrex EM | Exxon Unirex N 2 |
|-------------------------------|---------------------|---------------------|------------------|------------------|
| Color | Amber | Amber | Blue | Green |
| Thickener Type | Lithium | Lithium | Polyurea | Lithium-complex |
| Oil Type | Mineral | Mineral | Mineral | Mineral |
| NLGI number | 2 | 3 | 2 | 2 |
| Base oil viscosity | 98 | 98 | 115 | 115 |
| Typical operating temperature | -20 / 250 °F | -10 / 250 °F | -10 / 320 °F | -20 / 300 °F |
| Dropping point | 385°F | 385°F | 550°F | 437°F |
| PEER grease code | L15 | L16 | L151 | L05 |

Table 3: Grease properties

RADIAL INTERNAL CLEARANCE:

Radial internal clearance between balls and raceways in a ball bearing permits interference fits on one or both bearing rings without causing radial preload and accommodates slight misalignment of the bearing mounting.

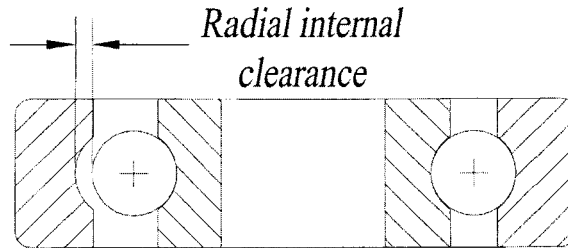


Figure 3: Exaggerated depiction of radial internal clearance.

Radial internal clearance may be defined as the average diameter of the outer ring raceway, minus the average diameter of the inner ring raceway, minus twice the ball diameter. Generally, radial internal clearance is measured on assembled bearings by displacing the outer ring radially with respect to the inner ring under a reversing light gauge load.

Clearance values in micrometers

| Basic bearing size | C2 | | C0 (Normal) | | C3 | | C4 | | C5 | |
|--------------------|------|------|-------------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| 202 | 0 | 9 | 3 | 18 | 11 | 25 | 18 | 33 | 25 | 45 |
| 203 | 0 | 9 | 3 | 18 | 11 | 25 | 18 | 33 | 25 | 45 |
| 204 | 0 | 10 | 5 | 20 | 13 | 28 | 20 | 36 | 28 | 48 |
| 205 | 1 | 11 | 5 | 20 | 13 | 28 | 23 | 41 | 30 | 53 |
| 206 | 1 | 11 | 5 | 20 | 13 | 28 | 23 | 41 | 30 | 53 |
| 207 | 1 | 11 | 6 | 20 | 15 | 33 | 28 | 46 | 40 | 64 |
| 208 | 1 | 11 | 6 | 20 | 15 | 33 | 28 | 46 | 40 | 64 |
| 209 | 1 | 11 | 6 | 23 | 18 | 36 | 30 | 51 | 45 | 73 |
| 210 | 1 | 11 | 6 | 23 | 18 | 36 | 30 | 51 | 45 | 73 |
| 211 | 1 | 15 | 8 | 28 | 23 | 43 | 38 | 61 | 55 | 90 |
| 212 | 1 | 15 | 8 | 28 | 23 | 43 | 38 | 61 | 55 | 90 |
| 213 | 1 | 15 | 8 | 28 | 23 | 43 | 38 | 61 | 55 | 90 |
| 214 | 1 | 15 | 10 | 30 | 25 | 51 | 46 | 71 | 65 | 105 |
| 215 | 1 | 15 | 10 | 30 | 25 | 51 | 46 | 71 | 65 | 105 |
| 216 | 1 | 15 | 10 | 30 | 25 | 51 | 46 | 71 | 65 | 105 |

Table 4: Radial internal clearance values (Clearance values in micrometers).

Clearance values in .0001 inch

| Basic bearing size | C2 | | C0 (Normal) | | C3 | | C4 | | C5 | |
|--------------------|------|------|-------------|------|------|------|------|------|------|------|
| | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. |
| 202 | 0 | 3.5 | 1 | 7 | 4 | 10 | 7 | 13 | 10 | 18 |
| 203 | 0 | 3.5 | 1 | 7 | 4 | 10 | 7 | 13 | 10 | 18 |
| 204 | 0 | 4 | 2 | 8 | 5 | 11 | 8 | 14 | 11 | 19 |
| 205 | 0.5 | 4.5 | 2 | 8 | 5 | 11 | 9 | 16 | 12 | 21 |
| 206 | 0.5 | 4.5 | 2 | 8 | 5 | 11 | 9 | 16 | 12 | 21 |
| 207 | 0.5 | 4.5 | 2 | 8 | 6 | 13 | 11 | 18 | 16 | 25 |
| 208 | 0.5 | 4.5 | 2 | 8 | 6 | 13 | 11 | 18 | 16 | 25 |
| 209 | 0.5 | 4.5 | 2.5 | 9 | 7 | 14 | 12 | 20 | 18 | 29 |
| 210 | 0.5 | 4.5 | 2.5 | 9 | 7 | 14 | 12 | 20 | 18 | 29 |
| 211 | 0.5 | 6 | 3.5 | 11 | 9 | 17 | 15 | 24 | 22 | 35 |
| 212 | 0.5 | 6 | 3.5 | 11 | 9 | 17 | 15 | 24 | 22 | 35 |
| 213 | 0.5 | 6 | 3.5 | 11 | 9 | 17 | 15 | 24 | 22 | 35 |
| 214 | 0.5 | 6 | 4 | 12 | 10 | 20 | 18 | 28 | 26 | 41 |
| 215 | 0.5 | 6 | 4 | 12 | 10 | 20 | 18 | 28 | 26 | 41 |
| 216 | 0.5 | 6 | 4 | 12 | 10 | 20 | 18 | 28 | 26 | 41 |

Table 5: Radial internal clearance values (Clearance values in .0001 inch).

LOAD CAPACITY:

The load capacity of PEER agricultural ball bearings are specified by two standardized ratings, the basic dynamic radial load rating (C_r) and the basic static radial load rating (C_{or}).

The basic dynamic radial load rating (C_r) is used for calculations when selecting a bearing that is to rotate under load. It represents the constant radial load a ball bearing could theoretically endure for a basic rating life of one million revolutions (33⅓ RPM for 500 hours).

The basic static radial load rating (C_{or}) of a bearing represents the load at which plastic deformation of the balls and raceways begins.

LIFE: The life of an individual ball bearing can be defined as the number of revolutions that the bearing is capable of enduring before fatigue damage occurs on one of the raceways or balls.

The basic rating life (L_{10}) represents the number of revolutions that 90% of a group of identical bearings can be expected to reach or exceed under the specified load before the onset of fatigue damage.

The basic rating life (L_{10}) equation for ball bearings*:

The relationship between the basic rating life in hours, the basic dynamic radial load rating, the bearing load and the rotational speed is expressed by equation 1.1.

$$L_{10} = (C_r / P_r)^3 (16,667/n) \quad \text{(hours)} \quad (1.1)$$

C_r = Basic dynamic radial load rating.

P_r = Dynamic equivalent radial load.

n = Bearing rotational speed, RPM.

*The basic rating life (L_{10}) equation should be used when selecting a bearing size.

The applied load may be directly substituted for the dynamic equivalent radial load (P_r) if it is constant and acts upon the bearing in a radial direction. If the bearing is subjected to any axial (thrust) load, the radial and/or axial loads must first be used to calculate P_r using equation 1.2 in conjunction with Table 6 and this result is substituted for P_r in equation 1.1. As the name suggests, the dynamic equivalent radial load is the theoretical equivalent radial load that would have the same influence over bearing life as the actual loads to which the bearing is subjected.

$$P_r = X(F_r) + Y(F_a) \quad (1.2)$$

F_r = Radial load applied to bearing

X = Radial factor (Table 6)

F_a = Axial (thrust) load applied to bearing

Y = Thrust factor (Table 6)

| F_a / C_{or} | e | $(F_a / F_r) \leq e$ | | $(F_a / F_r) > e$ | |
|----------------|------|----------------------|---|-------------------|------|
| | | X | Y | X | Y |
| 0.014 | 0.19 | | | | 2.30 |
| 0.028 | 0.22 | | | | 1.99 |
| 0.056 | 0.26 | | | | 1.71 |
| 0.084 | 0.28 | | | | 1.55 |
| 0.11 | 0.30 | 1 | 0 | 0.56 | 1.45 |
| 0.17 | 0.34 | | | | 1.31 |
| 0.28 | 0.38 | | | | 1.15 |
| 0.42 | 0.42 | | | | 1.04 |
| 0.56 | 0.44 | | | | 1.00 |

Table 6 – Radial and thrust factors for radial ball bearings.

Intermediate values of X,Y and e may be obtained through linear interpolation.

VARIABLE LOAD AND SPEED:

When a bearing is subjected to consecutive runs at different speeds and different periods of load application, the equivalent constant load (P_m) can be calculated using equation 1.3.

$$P_m = \sqrt[3]{\frac{(P_1^3 \times n_1 \times t_1) + (P_2^3 \times n_2 \times t_2) + \dots + (P_n^3 \times n_n \times t_n)}{(n_1 \times t_1) + (n_2 \times t_2) + \dots + (n_n \times t_n)}} \quad (1.3)$$

Where P_1 = Constant load at a speed of n_1 RPM for a time of t_1 minutes.

P_2 = Constant load at a speed of n_2 RPM for a time of t_2 minutes.

P_n = Constant load at a speed of n_n RPM for a time of t_n minutes.

Example calculations for use of the basic rating life (L_{10}) equation:

Example 1:

A GW209PPB2 is being considered for an application where it will rotate at a constant speed of 200 RPM and will be subjected to a constant 1,400 lbf. radial load.

From the catalog tables, the basic dynamic radial load rating (C_r) of 7,350 lbf. can be obtained.

Since the application does not incorporate an axial (thrust) load, the radial load can be substituted directly for P_r in equation 1.1.

Solution: $L_{10} = (7,350 \text{ lbf.} / 1,400 \text{ lbf.})^3 (16,667 / 200 \text{ RPM})$

$$L_{10} = 12,059 \text{ hours}$$

Example 2:

A W211PP2 is being considered for an application where it will rotate at a constant speed of 200 RPM and will be subjected to a constant 1,800 lbf. radial load and 995 lbf. axial (thrust) load.

From the catalog tables, the basic dynamic radial load rating (C_r) of 9,740 lbf. and the basic static radial load rating (C_{or}) of 5,850 lbf. can be obtained.

Since the application incorporates an axial load, equation 1.2 must be used to calculate the dynamic equivalent radial load.

Using equation 1.2:

- 1.) Calculate (F_a / C_{or}) .
 $(995 \text{ lbf.} / 5,850 \text{ lbf.}) = 0.17$
- 2.) Calculate (F_a / F_r) .
 $(995 \text{ lbf.} / 1,800 \text{ lbf.}) = 0.553$
- 3.) Find the value, (F_a / C_{or}) in the first column of Table 6 and the corresponding value for "e" in the second column*.
0.17 corresponds with an "e" value of 0.34.
**If the value for (F_a / C_{or}) is not present in the table, X, Y and e values may be obtained through linear interpolation.*
- 4.) Compare the value, (F_a / F_r) to the value of "e".
 - If $(F_a / F_r) \leq e$, the first two columns of X,Y values should be used.
 - If $(F_a / F_r) > e$, the second two columns of X,Y values should be used.**Since 0.553 is greater than 0.34, the second two columns of X,Y values will be used. X = 0.56, Y = 1.31.**
- 5.) Calculate the dynamic equivalent radial load (P_r) using equation 1.2.
 $P_r = 0.56(1,800 \text{ lbf.}) + 1.31(995 \text{ lbf.})$
 $P_r = 2,311 \text{ lbf.}$

Now that the value for P_r has been obtained, this result can be substituted into equation 1.1.

Solution: $L_{10} = (9,740 \text{ lbf.} / 2,311 \text{ lbf.})^3 (16,667 / 200 \text{ RPM})$

$$L_{10} = 6,239 \text{ hours}$$

HOUSING FIT SELECTION FOR BALL BEARINGS WITH CYLINDRICAL OUTSIDE DIAMETERS:

| DESIGN & OPERATING CONDITIONS | | | | |
|-------------------------------------|---|-------------------------------|--|-------------|
| Rotational Conditions | Loading | Other Conditions | Outer Ring Axial Displaceability | HOUSING FIT |
| Outer Ring Point Loaded | Light | Heat input through shaft | Outer ring easily axially displaceable | G7 |
| | Normal or Heavy | Housing split axially | | H7 |
| | | Housing not split axially | | H6 |
| | Shock with temporary complete unloading | | Transitional Range | J6 |
| Light | | K6 | | |
| Indeterminate Load Direction | Normal or Heavy | Split housing not recommended | | M6 |
| | Heavy shock | | | N6 |
| Outer Ring Circumferentially Loaded | Light Normal or Heavy | | Outer ring not easily axially displaceable | |
| | Heavy | Thin wall housing not split | | P6 |

Table 7- Selection of housing fits for ball bearings with cylindrical outside diameters.

HOUSING FITS FOR BALL BEARINGS WITH CYLINDRICAL OUTSIDE DIAMETERS:

Dimensions in Millimeters
Deviations and Fits in Micrometers

| D | | | PART 1 – TOLERANCE CLASSIFICATIONS | | | | | | | | | | | | | | | |
|------|-------|----------------|------------------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|
| over | incl. | Devia- tion | F7 | | G7 | | H8 | | H7 | | H6 | | J6 | | J7 | | K6 | |
| | | | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit |
| 10 | 18 | 0 -8 | +16 +34 | 42L 16L | +6 +24 | 32L 6L | 0 +27 | 35L 0 | 0 +18 | 26L 0 | 0 +11 | 19L 0 | -5 +6 | 14L 5T | -8 +10 | 18L 8T | -9 +2 | 10L 9T |
| 18 | 30 | 0 -9 | +20 +41 | 50L 20L | +7 +28 | 37L 7L | 0 +33 | 42L 0 | 0 +21 | 30L 0 | 0 +13 | 22L 0 | -5 +8 | 17L 5T | -9 +12 | 21L 9T | -11 +2 | 11L 11T |
| 30 | 50 | 0 -11 | +25 +50 | 61L 25L | +9 +34 | 45L 9L | 0 +39 | 50L 0 | 0 +25 | 36L 0 | 0 +16 | 27L 0 | -6 +10 | 21L 6T | -11 +14 | 25L 11T | -13 +3 | 14L 13T |
| 50 | 80 | 0 -13 | +30 +60 | 73L 30L | +10 +40 | 53L 10L | 0 +46 | 59L 0 | 0 +30 | 43L 0 | 0 +19 | 32L 0 | -6 +13 | 26L 6T | -12 +18 | 31L 12T | -15 +4 | 17L 15T |
| 80 | 120 | 0 -15 | +36 +71 | 86L 36L | +12 +47 | 62L 12L | 0 +54 | 69L 0 | 0 +35 | 50L 0 | 0 +22 | 37L 0 | -6 +16 | 31L 6T | -13 +22 | 37L 13T | -18 +4 | 19L 18T |
| 120 | 150 | 0 -18 | +43 +83 | 101L 43L | +14 +54 | 72L 14L | 0 +63 | 81L 0 | 0 +40 | 58L 0 | 0 +25 | 43L 0 | -7 +18 | 36L 7T | -14 +26 | 44L 14T | -21 +4 | 22L 21T |
| 150 | 180 | 0 -25 | +43 +83 | 108L 43L | +14 +54 | 79L 14L | 0 +63 | 88L 0 | 0 +40 | 65L 0 | 0 +25 | 50L 0 | -7 +18 | 43L 7T | -14 +26 | 51L 14T | -24 +4 | 29L 21T |

Table 8 - Housing fits for ball bearings with cylindrical outside diameters.

A “L” suffix specifies a loose, or clearance fit.

A “T” suffix specifies a tight, or interference fit.

Dimensions in Millimeters
Deviations and Fits in Micrometers

| D | | | TOLERANCE CLASSIFICATIONS | | | | | | | | | | | | | |
|------|-------|----------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|
| over | incl. | Devia- tion | K7 | | M6 | | M7 | | N6 | | N7 | | P6 | | P7 | |
| | | | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit |
| 10 | 18 | 0 -8 | -12 +6 | 14L 12T | -15 -4 | 4L 15T | -18 0 | 8L 18T | -20 -9 | 1T 20T | -23 -5 | 3L 23T | -26 -15 | 7T 26T | -29 -11 | 3T 29T |
| 18 | 30 | 0 -9 | -15 +6 | 15L 15T | -17 -4 | 5L 17T | -21 0 | 9L 21T | -24 -11 | 2T 24T | -28 -7 | 2L 28T | -31 -18 | 9T 31T | -35 -14 | 5T 35T |
| 30 | 50 | 0 -11 | -18 +7 | 18L 18T | -20 -4 | 7L 20T | -25 0 | 11L 25T | -28 -12 | 1T 28T | -33 -8 | 3L 33T | -37 -21 | 10T 37T | -42 -17 | 6T 42T |
| 50 | 80 | 0 -13 | -21 +9 | 22L 21T | -24 -5 | 8L 24T | -30 0 | 13L 30T | -33 -14 | 1T 33T | -39 -9 | 4L 39T | -45 -26 | 13T 45T | -51 -21 | 8T 51T |
| 80 | 120 | 0 -15 | -25 +10 | 25L 25T | -28 -6 | 9L 28T | -35 0 | 15L 35T | -38 -16 | 1T 38T | -45 -10 | 5L 45T | -52 -30 | 15T 52T | -59 -24 | 9T 59T |
| 120 | 150 | 0 -18 | -28 +12 | 30L 28T | -33 -8 | 10L 33T | -40 0 | 18L 40T | -45 -20 | 2T 45T | -52 -12 | 6L 52T | -61 -36 | 18T 61T | -68 -28 | 10T 68T |
| 150 | 180 | 0 -25 | -28 +12 | 37L 28T | -33 -8 | 17L 33T | -40 0 | 25L 40T | -45 -20 | 5L 45T | -52 -12 | 13L 52T | -61 -36 | 11T 61T | -68 -28 | 3T 68T |

Table 8 - continued: Housing fits for ball bearings with cylindrical outside diameters.

A “L” suffix specifies a loose, or clearance fit.

A “T” suffix specifies a tight, or interference fit.

HOUSING FITS FOR BALL BEARINGS WITH CYLINDRICAL OUTSIDE DIAMETERS, CONTINUED:

Dimensions in Inches
Deviations and Fits in .0001 Inches

| D | | | PART 2 – TOLERANCE CLASSIFICATIONS | | | | | | | | | | | | | | | |
|--------|--------|----------------|------------------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|
| | | | F7 | | G7 | | H8 | | H7 | | H6 | | J6 | | J7 | | K6 | |
| over | incl. | Devia- tion | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit |
| 0.3937 | 0.7087 | 0 | +6 | 16L | +2 | 12L | 0 | 14L | 0 | 10L | 0 | 7L | -2 | 5L | -3 | 7L | -4 | 4L |
| | | -3 | +13 | 6L | +9 | 2L | +11 | 0 | +7 | 0 | +4 | 0 | +2 | 2T | +4 | 3T | +1 | 4T |
| 0.7087 | 1.1811 | 0 | +8 | 19.5L | +3 | 14.5L | 0 | 16.5L | 0 | 11.5L | 0 | 8.5L | -2 | 6.5L | -4 | 8.5L | -4 | 4.5L |
| | | -3.5 | +16 | 8L | +11 | 3L | +13 | 0 | +8 | 0 | +5 | 0 | +3 | 2T | +5 | 4T | +1 | 4T |
| 1.1811 | 1.9685 | 0 | +10 | 24.5L | +4 | 17.5L | 0 | 19.5L | 0 | 14.5L | 0 | 10.5L | -2 | 8.5L | -4 | 10.5L | -5 | 5.5L |
| | | -4.5 | +20 | 10L | +13 | 4L | +15 | 0 | +10 | 0 | +6 | 0 | +4 | 2T | +6 | 4T | +1 | 5T |
| 1.9685 | 3.1496 | 0 | +12 | 29L | +4 | 21L | 0 | 23L | 0 | 17L | 0 | 12L | -2 | 10L | -5 | 12L | -6 | 7L |
| | | -5 | +24 | 12L | +16 | 4L | +18 | 0 | +12 | 0 | +7 | 0 | +5 | 2T | +7 | 5T | +2 | 6T |
| 3.1496 | 4.7244 | 0 | +14 | 34L | +5 | 25L | 0 | 27L | 0 | 20L | 0 | 15L | -2 | 12L | -5 | 15L | -7 | 8L |
| | | -6 | +28 | 14L | +19 | 5L | +21 | 0 | +14 | 0 | +9 | 0 | +6 | 2T | +9 | 5T | +2 | 7T |
| 4.7244 | 5.9055 | 0 | +17 | 40L | +6 | 28L | 0 | 32L | 0 | 23L | 0 | 17L | -3 | 14L | -6 | 17L | -8 | 9L |
| | | -7 | +33 | 17L | +21 | 6L | +25 | 0 | +16 | 0 | +10 | 0 | +7 | 3T | +10 | 6T | +2 | 8T |
| 5.9055 | 7.0866 | 0 | +17 | 43L | +6 | 31L | 0 | 35L | 0 | 26L | 0 | 20L | -3 | 17L | -6 | 20L | -8 | 12L |
| | | -10 | +33 | 17L | +21 | 6L | +25 | 0 | +16 | 0 | +10 | 0 | +7 | 3T | +10 | 6T | +2 | 8T |

Table 9 - Housing fits for ball bearings with cylindrical outside diameters.

A “L” suffix specifies a loose, or clearance fit.

A “T” suffix specifies a tight, or interference fit.

Dimensions in Inches
Deviations and Fits in .0001 Inches

| D | | | TOLERANCE CLASSIFICATIONS | | | | | | | | | | | | | |
|--------|--------|----------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|---------------------------|--------------------|
| | | | K7 | | M6 | | M7 | | N6 | | N7 | | P6 | | P7 | |
| over | incl. | Devia- tion | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit | Housing Devia- tion | Result- ant Fit |
| 0.3937 | 0.7087 | 0 | -5 | 5L | -6 | 1L | -7 | 3L | -8 | A1T | -9 | 1L | -10 | 3T | -11 | 1T |
| | | -3 | +2 | 5T | -2 | 6T | 0 | 7T | -4 | 9T | -2 | 9T | -6 | 10T | -4 | 11T |
| 0.7087 | 1.1811 | 0 | -6 | 5.5L | -7 | 1.5L | -8 | 3.5L | -9 | 0.5T | -11 | 0.5L | -12 | 3.5T | -14 | 2.5T |
| | | -3.5 | +2 | 6T | -2 | 7T | 0 | 8T | -4 | 9T | -3 | 11 | -7 | 12T | -6 | 14T |
| 1.1811 | 1.9685 | 0 | -7 | 7.5L | -8 | 2.5L | -10 | 4.5L | -11 | 0.5T | -13 | 1.5L | -15 | 3.5T | -17 | 2.5T |
| | | -4.5 | +3 | 7T | -2 | 8T | 0 | 10T | -5 | 11T | -3 | 13T | -8 | 15T | -7 | 17T |
| 1.9685 | 3.1496 | 0 | -8 | 9L | -9 | 3L | -12 | 5L | -13 | 1T | -15 | 1L | -18 | 5T | -20 | 3T |
| | | -5 | +4 | 8T | -2 | 9T | 0 | 12T | -6 | 13T | -4 | 15T | -10 | 18T | -28 | 20T |
| 3.1496 | 4.7244 | 0 | -10 | 10L | -11 | 4L | -14 | 6L | -15 | 0 | -18 | 2L | -20 | 6T | -23 | 3T |
| | | -6 | +4 | 10T | -2 | 11T | 0 | 14T | -6 | 15T | -4 | 18T | -12 | 20T | -9 | 23T |
| 4.7244 | 5.9055 | 0 | -11 | 12L | -13 | 4L | -16 | 7L | -18 | 1T | -20 | 2L | -24 | 7T | -27 | 4T |
| | | -7 | +5 | 11T | -3 | 13T | 0 | 16T | -8 | 18T | -5 | 20T | -14 | 24T | -11 | 27T |
| 5.9055 | 7.0866 | 0 | -11 | 15L | -13 | 7 | L-16 | 10L | -18 | 2L | -20 | 5L | -24 | 4T | -27 | 1T |
| | | -10 | +5 | 11T | -3 | 13T | 0 | 16T | -8 | 18T | -5 | 20T | -14 | 24T | -11 | 27T |

Table 9 - continued: Housing fits for ball bearings with cylindrical outside diameters.

A “L” suffix specifies a loose, or clearance fit.

A “T” suffix specifies a tight, or interference fit.



PEER AG BEARINGS INTERCHANGE

| PEER | FAFNIR | BCA | LINK-BELT | NTN |
|------------|------------|------------|--------------|------------------|
| W208PPB2 | W208PPB2 | | 24R6-208E3 | 2AC08-1 1/2 |
| W208PP5 | W208PP5 | DC208TT5 | 18SB5-2E08E3 | 5AS08-1 1/8 |
| W208PPB5 | W208PPB5 | DS208TT5 | 18S5-2E08E3 | 1AS08-1 1/8 |
| W208PP6 | W208PP6 | DC208TT6 | 16SB5-208E3 | |
| W208PPB6 | W208PPB6 | DS208TT6 | 16S5-208E3 | 1AS08-1 |
| W208PPB7 | W208PPB7 | DS208TT7 | 19R208E3 | 1AC08-1 3/16 |
| W208PP8 | W208PP8 | DC208TT8 | 18SB2-2E08E3 | 6AS09-1 1/8 |
| W208PPB8 | W208PPB8 | DS208TT8 | 18S2-2E08E3 | 2AS08-1 1/8 |
| W208PPB9 | W208PPB9 | DS208TT9 | 16S2-208E3 | 2AS08-1 1/8 |
| W208PP10 | W208PP10 | DC208TT10 | 24RB8-208E3 | |
| W208PPB10 | W208PPB10 | | | |
| W208PPB11 | W208PPB11 | DS208TT11 | 14S4-208E3 | 4AS08-7/8 |
| W208PPB12 | W208PPB12 | DS208TT12 | 18S4-2E08E3 | 4AS08-1 1/8 |
| W208PPB13 | W208PPB13 | DS208TT13 | 14S5-208E3 | 1AS08-7/8 |
| W208PPB23 | W208PPB23 | DS208TT2A | | |
| GW208PPB5 | GW208PPB5 | DS208TTR21 | 18SG7-2E08E3 | 1AS08-1 5/32D1 |
| GW208PPB6 | GW208PPB6 | DS208TTR6 | 16SG7-208E3 | |
| GW208PPB8 | GW208PPB8 | DS208TTR8 | 18SG2-2E08E3 | 2AS08-1 1/8 D1 |
| GW208PP17 | GW208PP17 | DC208TTR17 | | |
| GW208PPB17 | GW208PPB17 | | | |
| W209PPB2 | W209PPB2 | DS209TT2 | R3-209E3 | |
| W209PPB4 | W209PPB4 | DS209TT4 | 24R3-209E3 | 3AC09-1/2 |
| W209PPB5 | W209PPB5 | DS209TT5 | 20S2-209E3 | 2AS09-1 1/4 |
| W209PPB6 | W209PPB6 | DS209TT6 | 24R-209E3 | |
| W209PPB7 | W209PPB7 | DS209TT7 | 20S4-209E3 | |
| W209PPB8 | W209PPB8 | DS209TT8A | | |
| GW209PPB2 | GW209PPB2 | DS209TTR2 | RG3-209E3 | 3AC09D1 |
| GW209PPB4 | GW209PPB4 | DS209TTR4 | 24RG3-209E3 | 3AC09 1 1/2 D1 |
| GW209PPB5 | GW209PPB5 | DS209TTR5 | | |
| GW209PPB8 | GW209PPB8 | DS209TTR8 | 20SG5-209E3 | |
| GW209PPB11 | GW209PPB11 | DS209TTR10 | | 1AC09D1V1 |
| W210PP2 | W210PP2 | DC210TT2 | 31RB3-210E3 | 7AC10-1 15/16 |
| W210PPB2 | W210PPB2 | DS210TT2 | 31R3-210E3 | 3AC10-1 15/16 |
| W210PP4 | W210PP4 | DC210TT4 | 18SB3-210E3 | 7AS10-1 1/8 |
| W210PPB4 | W210PPB4 | DS210TT4 | 18S3-210E3 | 3AS10-1 3/4 |
| W210PPB5 | W210PPB5 | DS210TT5 | 28R3-210E3 | 3AC10-1 3/4 |
| W210PPB6 | W210PPB6 | DS210TT6 | 18S2-210E3 | 2AS10-1 1/8 |
| W210PPB9 | W210PPB9 | | | |
| GW210PPB2 | GW210PPB2 | DS210TTR2 | 31RG3-210E3 | 3AC10-1 15/16 D1 |
| GW210PP4 | GW210PP4 | DC210TTR4 | 18SBG3-210E3 | 7AS10-1 1/8 D1 |
| GW210PPB4 | GW210PPB4 | DS210TTR4 | 18SG3-210E3 | |
| GW210PPB5 | GW210PPB5 | DS210TTR5R | 28RG3-210E3 | 3AC10-1 3/4 D1 |
| W211PP2 | W211PP2 | DC211TT2 | 35RB3-211E3 | 7AC11-2 3/16 |
| W211PPB2 | W211PPB2 | DS211TT2 | 35R3-211E3 | 3AC11-2 3/16 |
| W211PP3 | W211PP3 | DC211TT3 | 24SB3-211E3 | 7AS11-1 1/2 |
| W211PPB3 | W211PPB3 | DS211TT3 | 24S3-211E3 | 3AS11-1 1/2 |
| W211PPB4 | W211PPB4 | DS211TT4 | | |
| W211PP5 | W211PP5 | DC211TT5 | | 6AS11-1 1/2 V1 |
| W211PPB5 | W211PPB5 | | | |
| W211PPB6 | W211PPB6 | DS211TT6 | | 4AS11-1 1/2 |

| PEER | FAFNIR | BCA | LINK-BELT | NTN |
|---------------|------------|-------------|--------------|-----------------|
| GW211PP2 | GW211PP2 | DC211TTR2 | 35RBG3-211E3 | 7AS11-1 1/2 D1 |
| GW211PPB2 | GW211PPB2 | DS211TTR2 | 35RG3-211E3 | 3AC11-2 3/16 D1 |
| GW211PP3 | GW211PP3 | DC211TTR3 | 24SBG3-211E3 | 7AS11-1 1/2 D1 |
| GW211PPB3 | GW211PPB3 | DS211TTR3 | 24SG3-211E3 | 3AS11-1 1/2 D1 |
| GW211PP5 | GW211PP5 | | | |
| GW211PPB9 | GW211PPB9 | DS211TTR9 | | |
| GW211PPB13 | GW211PPB13 | DS211TTR13 | | |
| GW211PP17 | GW211PP17 | DC211TTR3E | | |
| GW211PPB17 | GW211PPB17 | | | |
| GW211PP25 | GW211PP37 | DC211TTR21 | | |
| GW214PP2 | GW214PP2 | DC214TTR2 | | |
| GW214PPB2 | GW214PPB2 | | | 3AC14D1 |
| GW214PPB3 | | DS214TTR3 | | |
| GW214PPB4 | GW214PPB4 | | | 3AS14-2D1 |
| GW214PPB5 | GW1214PPB5 | DS214TTR5 | | |
| GW214PPB6 | | DS214TTRA | | |
| GW216PP2 | GW216PP2 | DC216TTR2 | | |
| RX84 | | | | |
| X365 | | | | |
| 202KRR3 | 202KRR3 | | | |
| 202NPP9 | 202NPP9 | 202FFH8 | | |
| 202RRE | J202KRR8 | 202KRR8 | | |
| CF5202-2RST-8 | | | | DF0109LLPK1 |
| 203JD | | 203K | | 5X0366LUL |
| 203KR2 | 203KR2 | | | |
| BB203KRR2 | BB203KRR2 | 203RRAR10N2 | | |
| BB203KRR2FD | | | | |
| 203KRR2 | 203KRR2 | 203RRAR10 | 126115 | |
| 203KRR2FD | | | | |
| 203KRR3 | 203KRR3 | 8984YY | BS226119 | |
| 203KRR5 | 203KRR5 | 203RRAR8 | | |
| 203KRR6 | 203KRR6 | 203RRH10 | | |
| 203NPP9 | 203NPP9 | | | |
| 5203KYY2 | 5203KYY2 | | | |
| Z9504-2RST | P204RR6 | 204BBAR | | SC0451IIC3 |
| 204KRR2 | 204KRR2 | HPC011GP | 11KB204N | 1AH04-11/16 |
| 204KRRB2 | 204KRRB2 | | 11K204N | |
| 204KRR14 | 204KRR14 | | | |
| 204JY3 | 204RY2 | 204FVMN | | |
| 204KRD4 | 204KRD4 | 204FGB | | |
| 204RR8 | 204RR8 | 204BBE | | |
| 205KRP2 | 205KRP2 | 205RVA | | |
| 205KR3 | 205KR3 | 205RHN | | |
| 205KP6 | 205KP6 | 205TNJ | | |
| 205KP8 | 205KP8 | 205-TNK | | |
| 205KPP2 | | | | |
| 205KPPB2 | | | | |
| 205KRR2 | 205KRR2 | HPC014GP | 14KB205N | 1AH05-7/8 |
| 205KRRB2 | 205KRRB2 | HPS014GP | 14K205N | 2AH05-7/8 |
| 205KRR7 | 205KRR7 | 205RRUN | | |
| 205KYY3 | 205KYY3 | 205-VVA | | |
| G205PPB7 | | 205TTRH | | |
| 205PPB7 | 205PPB7 | 205TTH | BS217948N | |



PEER AG BEARINGS INTERCHANGE

| PEER | FAFNIR | BCA | LINK-BELT | NTN |
|--------------------|-------------|-------------|------------|----------------|
| 205PP8 | 205PP8 | | | |
| 205PP9 | 205PP9 | 205TTB | BS225817 | |
| 205PP10 | 205PP10 | | | |
| 205PP12 | 205PP12 | 205TTP | | |
| 6205-2RST-22 | 205PPB | S205FF | | CS205LLU |
| 206K14 | 206K14 | | | |
| 206KP2 | 206KP2 | | | |
| 206KPP16 | 206KPP16 | 206GGH | | |
| 206KRR6 | 206KRR6 | HPC100GP | 16KB206N | 1AH06-1 |
| 206KRRB6 | 206KRRB6 | HPS100GP | 16K206N | 2AH06-1 |
| 206KRP4 | 206KPR4 | | | |
| 206KPPB5 | 206KPPB5 | | | |
| 5206KPP3 | 5206KPP3 | | | |
| G207KPPB2 | G207KPPB2 | HPS102TR | | |
| 207KRR14 | 207KRR14 | | | |
| 207KRRB9 | 207KRRB9 | HPS102GP | 18K207N | 2AH07-1 1/8 |
| 207KRRB12 | 207KRRB12 | HPS102GPE | | |
| 207KYY | 207KYY | | | |
| 88107 | 207KRR3 | 88107 | | |
| GW208PPB22 | GW208PPB22 | | | |
| W208K2 | W208K2 | | | DC208-TT2 |
| W208K3 | W208K3 | | | DC208 |
| W208KRRB6 | W208KRRB6 | HPS106GPN | | |
| W208PPB16 | W208PPB16 | HPS104TP | 20K5-208E3 | A2AH08-1 1/4V2 |
| 208KRR4 | 208KRR4 | | | |
| G209KPPB2 | | | | |
| 209KRRB2 | 209KRRB2 | HPS108GPH | 24K209N | 2AH09-1 1/2 |
| GW209PPB22-BR209RH | | CDS209TTR6P | | |
| G5209KYYB2 | | | | |
| GC211-32-NLC | GC1200KPPB2 | | | |
| GW211PPB21-BR211RH | | CDS211TTR23 | | |
| W213-8445 | | 8445 | | |



USA

California: Ceritos
Florida: Clearmont, Tampa
Georgia: Atlanta
Illinois: Moline, Waukegan, Cary
Indiana: Fishers
Kansas: Olathe
Kentucky: Louisville, Taylor Mills
Louisiana: Natchitoches, Alabaster
Michigan: Plymouth
Missouri: Columbia
New Hampshire: Manchester
New York: Burnt Hills, Schoharie
North Carolina: Charlotte
Ohio: Pickerington, Chagrin Falls
Oregon: Gresham
Texas: Spring, Deer Park, Brownsville, Harlingen
Virginia: Glen Allen, Vinton
Wisconsin: St.Croix Falls

International

Argentina

PEER Bearing S.A.
Coronel Larrabure 2460 (Ruta 9 - Km 562)
(Zona Industrial)
5900 Villa Maria
Cordoba Argentina
phone# (54) 353-453-1694
info@peerarg.com

Canada

Calgary, Alberta
Montreal, Quebec

Mexico

Guadalupe

Brazil

Porto Alegre

Japan

Chiba

United Kingdom

PEER Bearing Limited
Unit 6, Chelworth Park Chelworth Road
Cricklade, Wiltshire
SN6 6HE, England
phone # (44) 1793-759459
email: info@peereurope.com

PEER's World-Wide Manufacturing Facilities



PEER Ball Bearing Factory, Xinchang, Zhejiang, China



PEER Tapered Bearing Factory, Changshan, Zhejiang, China




PEER Small Bore Bearing Factory, Cixi, Zhejiang, China



PEER Bearing S.A. Cordoba, Argentina

Distributed by:



USA Headquarters
2200 Norman Drive West
Waukegan, Illinois 60085
Tel: 847-578-1000
Fax: 847-578-1200
e-mail: info@peerbearing.com
www.peer-usa.com
www.peerbearing.com

Agricultural Bearings

