


Tapered roller bearings

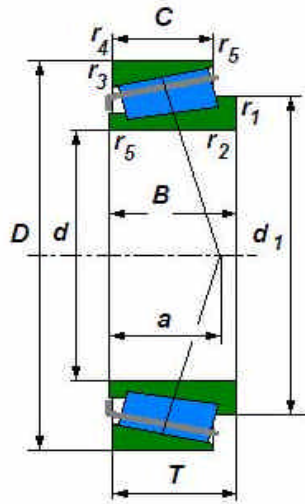

Bearing		ISO dimensions			Load ratings		Speed limits		Weight	Dimensions				
Cup	Cone	d mm	D	T	Co kN	Cor kN	grease r/min	oil r/min	kg	B	C	r _{1,2}	r _{3,4}	a
LM 11749	LM 11710	17,462	39,878	13,843	19,8	21,1	8599	12000	0,081	14,605	10,688	1,3	1,3	8,6
LM 11949	LM 11910	19,050	45,237	15,494	25,5	25,1	7500	11000	0,120	16,637	12,065	1,3	1,3	10,1
L 44649	L 44610	26,988	50,292	14,224	23,4	25,9	6300	9000	0,120	14,732	10,668	3,6	1,3	11,0
LM 67048	LM 67010	31,750	59,131	15,875	31,1	35,9	5300	7500	0,180	16,764	11,811	3,6	1,3	12,0
LM 48548	LM 48510	34,925	65,008	18,034	42,9	50,7	4800	7000	0,240	18,288	13,970	3,6	1,3	14,3
25580	25520	44,450	82,931	23,813	75,7	95,1	3800	5600	0,554	25,400	19,050	3,6	0,8	17,5